



SIRIUS, COMPACT STARTER,
REVERSING STARTER 400 V, 24 V AC/DC,
50 ... 60 HZ, 8 ... 32 A, IP20,
MAIN CIRCUIT CONNECTION: SPRING-LOADED
TERMINAL,
AUXILIARY CIRCUIT CONNECTION: SPRING-LOADED
TERMINAL

General technical data:

Product brand name		SIRIUS
product designation		compact starter
Design of the product		reversing feeder
Trip class		CLASS 10 and 20 adjustable
Product function		
• control circuit interface to parallel wiring		Yes
• bus-communication		No
• short circuit protection		Yes
• control circuit interface with IO link		No
Type of assignment		continuous operation according to IEC 60947-6-2
Protection class IP		IP20
Degree of pollution		3
Built in orientation / recommended		vertical, on horizontal standard mounting rail
Installation altitude / at a height over sea level		
• maximum	m	2,000
Ambient temperature		
• during storage	°C	-55 ... 80
• during operating	°C	-20 ... 60
• during transport	°C	-55 ... 80

Relative humidity • during operating phase	%	10 ... 90
Resistance against shock		a=60 m/s ² (6g) with 10 ms per 3 shocks in all axes
Resistance against vibration		f= 4 ... 5.8 Hz, d= 15 mm; f= 5.8 ... 500 Hz, a= 20 m/s ² ; 10 cycles
Impulse voltage resistance / rated value	V	6,000
Field-bound parasitic coupling • according to IEC 61000-4-3		10 V/m
Insulation voltage / rated value	V	690
Conductor-bound parasitic coupling conductor-earth SURGE • according to IEC 61000-4-5		4 kV main contacts, 2 kV auxiliary contacts
Conductor-bound parasitic coupling conductor-conductor SURGE • according to IEC 61000-4-5		2 kV main contacts, 1 kV auxiliary contacts
Conductor-bound parasitic coupling BURST • according to IEC 61000-4-4		4 kV main contacts, 2 kV auxiliary contacts
Maximum permissible voltage for safe disconnection • between main circuit and auxiliary circuit • between control and auxiliary circuit • between auxiliary circuit and auxiliary circuit	V V V	400 300 250
Item designation • according to DIN 40719 extendable after IEC 204-2 / according to IEC 750 • according to DIN EN 61346-2		Q Q

Main circuit:

Operating voltage / at AC-3 / rated value • maximum	V	400
Number of poles / for main current circuit		3
Adjustable response current • of the current-dependent overload release	A	8 ... 32
Formula for making capacity limit current		12 x I _e
Formula for interruption capacity limit current		10 x I _e
Emitted mechanical power / for 4-pole three-phase motor • at 400 V / rated value	kW	15
Service power / at AC-3 / at 400 V / rated value	kW	15
Frequency of operation / at AC-41 / according to IEC 60947-6-2 / maximum	1/h	750
Frequency of operation / at AC-43 / according to IEC 60947-6-2 / maximum	1/h	250
Off-load operating frequency	1/h	3,600
Mechanical operating cycles as operating time		

- of the main contacts / typical
- of the auxiliary contacts / typical
- of the signal contacts / typical

10,000,000
10,000,000
10,000,000

Control circuit:

type of voltage

AC

Control supply voltage / 1

- for DC
 - rated value
- at 50 Hz / for AC
 - rated value
- at 60 Hz / for AC
 - rated value

V

24

V

24

V

24

Holding power

- for AC / maximum
- for DC / maximum

W

3.5

W

3.1

Switch-off delay time

ms

50

Start-up delay time

ms

70

Auxiliary circuit:

Product extension

- auxiliary switch

Yes

Number of NC contacts

- for auxiliary contacts

0

Number of NO contacts

- for auxiliary contacts
- of the non-delayed short-circuit release / for alarm contact

2

1

Number of changeover contacts / of the current-dependent overload release / for alarm contact

1

Operating current / of the auxiliary contacts / at AC-12

- maximum

A

10

Electrical switching cycle as operating time / of the auxiliary contacts

- at AC-15 / at 6 A / at 230 V / typical
- at DC-13 / at 6 A / at 24 V / typical

500,000

100,000

Electrical switching cycle as operating time / of the signal contacts

- at AC-15 / at 6 A / at 230 V / typical
- at DC-13 / at 6 A / at 24 V / typical

500,000

100,000

Short-circuit:

Design of the fuse link / for short-circuit protection of the auxiliary switch <ul style="list-style-type: none"> • required 		fuse gL/gG: 10 A
Installation/mounting/dimensions:		
Type of mounting		screw and snap-on mounting
Width	mm	90
Height	mm	191
Depth	mm	165
Built in orientation		any
Connections:		
Product function		
<ul style="list-style-type: none"> • removable terminal for main circuit 		Yes
<ul style="list-style-type: none"> • removable terminal for auxiliary and control circuit 		Yes
Design of the electrical connection		
<ul style="list-style-type: none"> • for main current circuit 		spring-loaded terminals
<ul style="list-style-type: none"> • for auxiliary and control current circuit 		spring-loaded terminals
Type of the connectable conductor cross-section		
<ul style="list-style-type: none"> • for main contacts <ul style="list-style-type: none"> • solid • finely stranded 		2x (2.5 ... 6 mm ²), 1x 10 mm ²
<ul style="list-style-type: none"> <ul style="list-style-type: none"> • with conductor end processing • without conductor final cutting 		2x (2.5 ... 6 mm ²)
		2x (2.5 ... 6 mm ²)
<ul style="list-style-type: none"> • for auxiliary contacts <ul style="list-style-type: none"> • solid • finely stranded 		2x (0.25 ... 1.5 mm ²)
<ul style="list-style-type: none"> <ul style="list-style-type: none"> • with conductor end processing • without conductor final cutting 		2x (0.25 ... 1.5 mm ²)
		2x (0.25 ... 1.5 mm ²)
<ul style="list-style-type: none"> • for AWG conductors <ul style="list-style-type: none"> • for main contacts • for auxiliary contacts 		2x (14 ... 10), 1x 8
		2x (24 ... 16)
Certificates/approvals:		
Verification of suitability		IEC / EN 60947-6-2

General Product Approval	Functional Safety / Safety of Machinery	Test Certificates
--------------------------	---	-------------------



CQC



CSA

[ROSTEST](#)


UL

[other](#)
[Manufacturer](#)

Shipping Approval	other
-------------------	-------



DNV



PRS



RINA

[Manufacturer](#)
[other](#)

UL/CSA ratings:

yielded mechanical performance (hp) / for three-phase squirrel cage motors

- at 200/208 V / rated value
- at 220/230 V / rated value
- at 460/480 V / rated value

hp	7.5
hp	10
hp	20

Operating current (FLA) / for three-phase squirrel cage motors

- at 480 V / rated value

A	32
---	----

Contact rating designation / for auxiliary contacts / according to UL

contacts 21-22, 13-14, 43-44 Q600 / A600, contacts 77-78 R300 / B300, contacts 95-96-98 R300 / D300

Reliability figures:

B10 value

3,000,000

Proportion of dangerous failures

%	50
---	----

Proportion of dangerous failures / with low demand rate / according to SN 31920

%	40
---	----

Protection against electrical shock

finger-safe

Failure rate (FIT value) / with low demand rate / according to SN 31920

FIT	100
-----	-----

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

Cax online generator:




<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RA6250-2EB32/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RA6250-2EB32

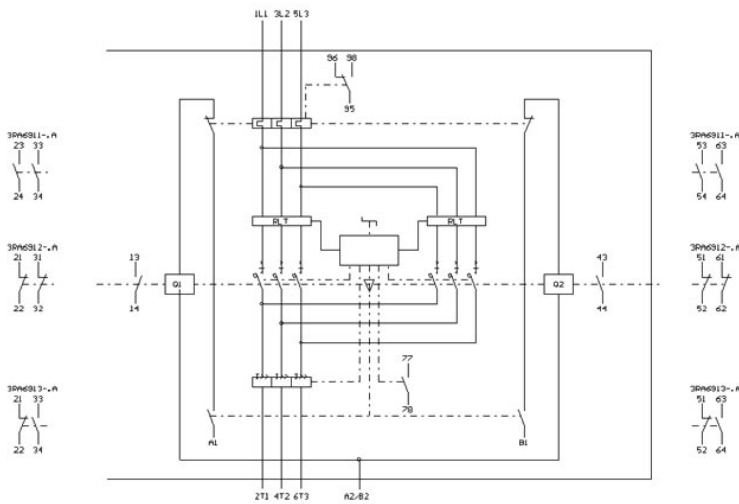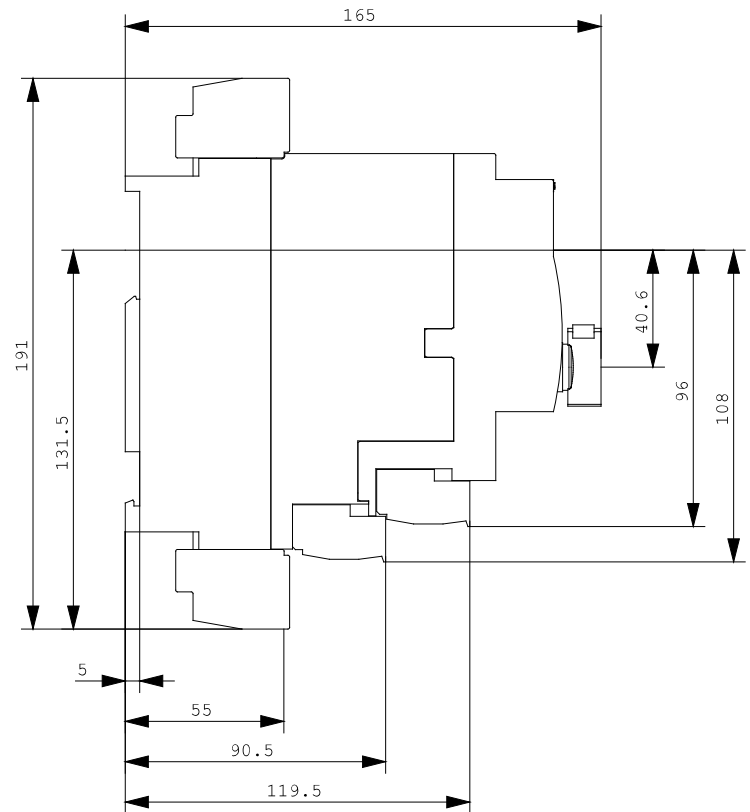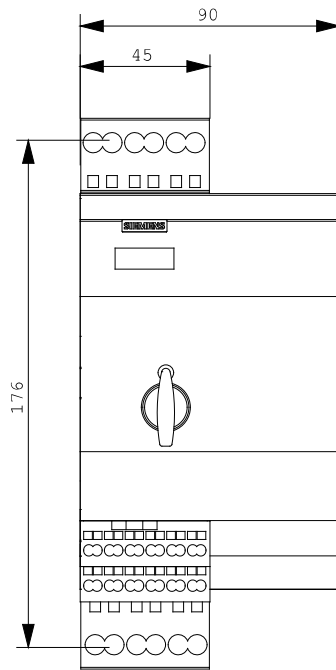

last change:

Oct 24, 2011