



ADAPTER 45 MM FOR MOTOR STARTER PROTECTOR  
3RV102. CABLE CROSS-SECTION AWG10

### General technical data:

<b>Product brand name</b>		SIRIUS
<b>product designation</b>		adapter 45 mm
<b>Protection class IP</b>		IP20
<b>Degree of pollution</b>		3
<b>Installation altitude / at a height over sea level</b>		
• maximum	m	2,000
<b>Ambient temperature</b>		
• during transport	°C	-55 ... 80
• during storage	°C	-55 ... 80
• during operating	°C	-20 ... 60
<b>Insulation voltage / rated value</b>	V	400
<b>Item designation</b>		
• according to DIN EN 61346-2		U
• according to DIN 40719 extendable after IEC 204-2 / according to IEC 750		U

### Main circuit:

<b>Operating current / at 400 V / for AC</b>		
• rated value	A	25
<b>Operating voltage / at AC-3 / rated value</b>		

• maximum

V

400

#### Installation/mounting/dimensions:

Type of mounting

snap-on mounting

Width

mm

45

Height

mm

26

Depth

mm

23

#### General Product Approval



[ROSTEST](#)



#### Shipping Approval

other



[Manufacturer](#)

[other](#)

#### Safety:

Protection against electrical shock

finger-safe

#### Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

CAX-Online-Generator



<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RA6890-0BA/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3RA6890-0BA](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RA6890-0BA)

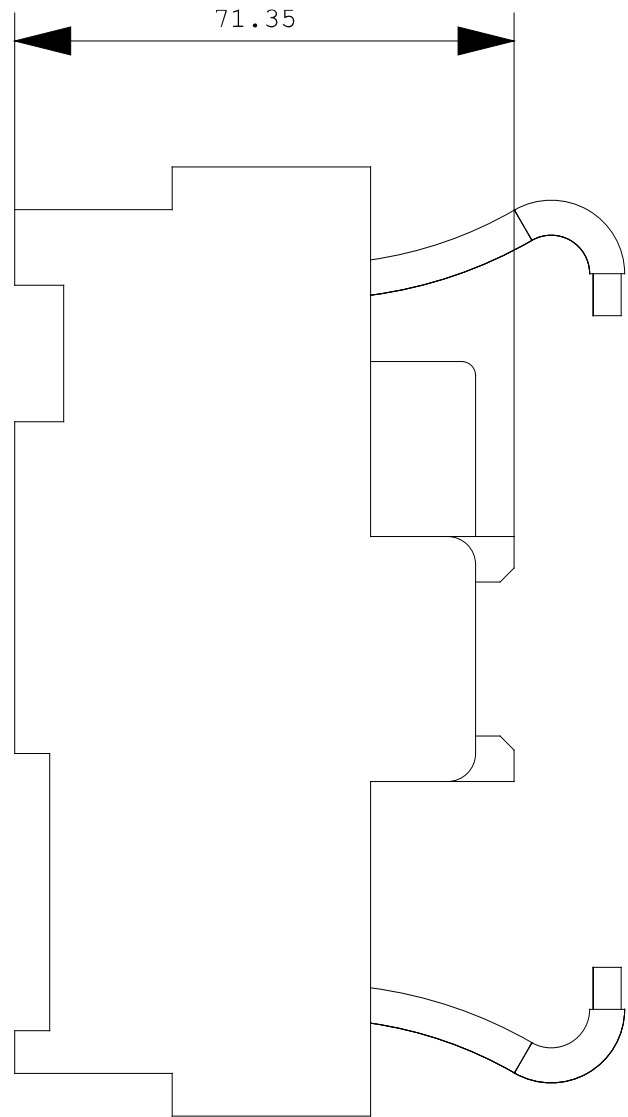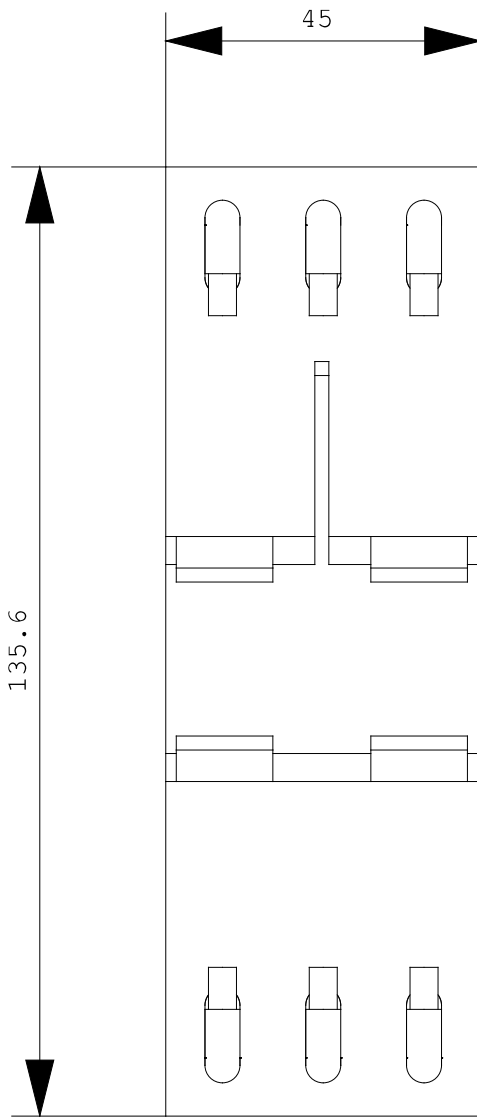

last change:

Oct 24, 2011