

CONTROL KIT,



General technical data:

Product brand name		SIRIUS
product designation		control kit
Protection class IP		IP20
Relative humidity		
• during operating phase	%	10 ... 90
Ambient temperature		
• during transport	°C	-55 ... 80
• during storage	°C	-55 ... 80
• during operating	°C	-20 ... 60
Item designation		
• according to DIN EN 61346-2		K
• according to DIN 40719 extendable after IEC 204-2 / according to IEC 750		K

Installation/mounting/dimensions:

Width	mm	44.8
Height	mm	40
Depth	mm	23.4

Certificates/approvals:

Verification of suitability

IEC / EN 60947-6-2

General Product Approval

other

[ROSTEST](#)

[Manufacturer](#)

[other](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

CAX-Online-Generator


<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RA6950-0A/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RA6950-0A

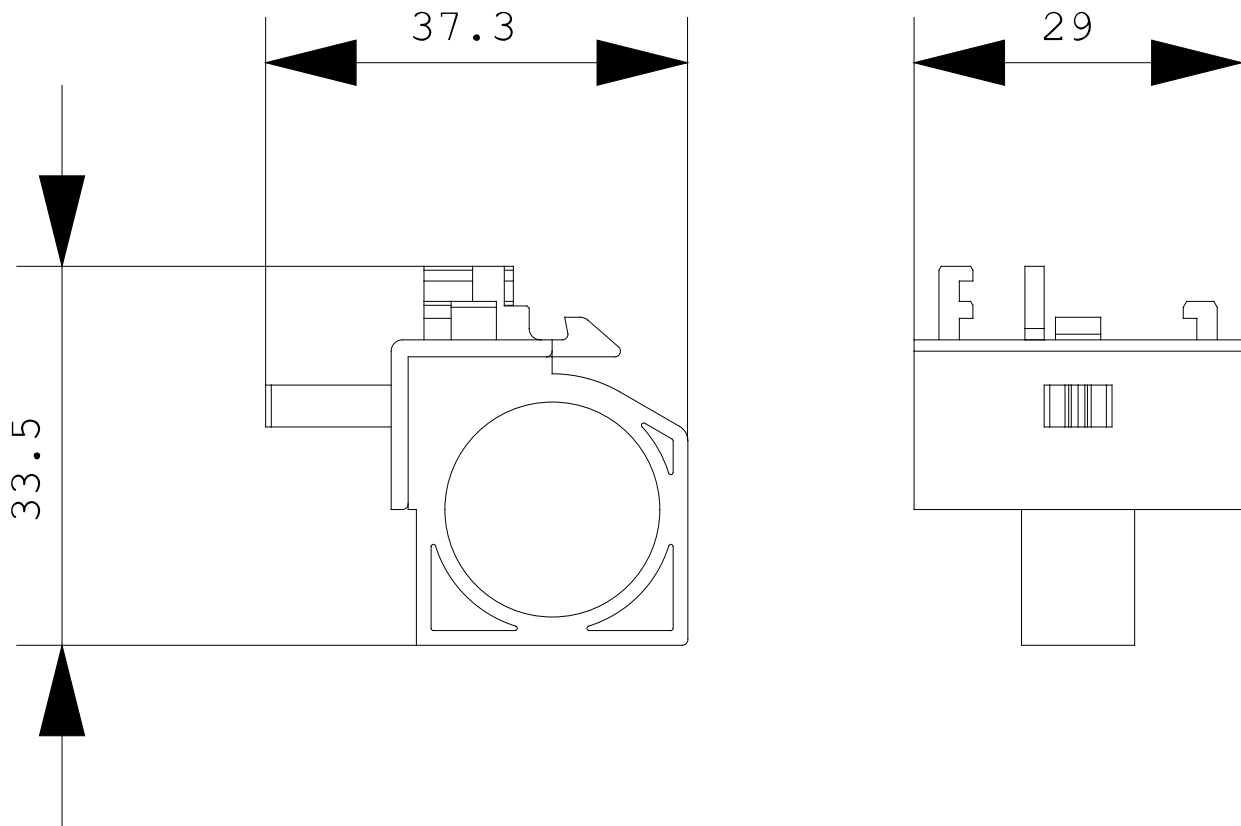

last change:

Oct 24, 2011