



LOAD FEEDER FUSELESS DIRECT START,
AC 400V, SZ S00 0.22. . .0.32A,
DC 24V SCREW CONNECTION FOR BUSBAR SYSTEMS
60MM TYPE OF COORDINATION 2,
IQ = 150KA (ALSO FULFILLS TYPE OF COORDINATION 1)
1NO (CONTACTOR)

General technical data:

| | | |
|--|----|--|
| Product brand name | | SIRIUS |
| product designation | | non-fused load feeders 3RA2 |
| Design of the product | | direct starter |
| Size of the load feeder | | S00 |
| Protection class IP / on the front | | IP20 |
| Degree of pollution | | 3 |
| Insulation voltage / rated value | V | 690 |
| Installation altitude / at a height over sea level / maximum | m | 2,000 |
| Ambient temperature <ul style="list-style-type: none"> during transport during storage during operating | °C | -55 ... 80 -55 ... 80 -20 ... 60 |
| Impulse voltage resistance / rated value | kV | 6 |
| Active power loss / per conductor / typical | W | 2 |
| Item designation <ul style="list-style-type: none"> according to DIN 40719 extendable after IEC 204-2 / according to IEC 750 according to DIN EN 61346-2 | | Q Q |
| Type of assignment | | 2 |

| | | |
|---|---|-------------------------------|
| Mechanical operating cycles as operating time / of the contactor | | |
| • typical | | 10,000,000 |
| Manufacturer article number | | |
| • of the circuit-breakers included in the scope of supply | | 3RV2011-0DA10 |
| • of the contactor included in the scope of supply | | 3RT2015-1BB41 |
| • of the link module included in the scope of supply | | 3RA1921-1DA00 |
| • of the busbar adapter included in the scope of supply | | 8US1251-5DS10 |
| Design of the switching contact | | mechanical |
| Type of the motor protection | | bimetal |
| Adjustable response current | | |
| • of the current-dependent overload release | A | 0.22 ... 0.32 |

Communication:

| | | |
|--|--|----|
| Product function / bus-communication | | No |
| Protocol / will be supported | | |
| • AS interface protocol | | No |
| • PROFIBUS DP protocol | | No |
| • PROFINET protocol | | No |
| Product extension / function module for communication | | No |

Main circuit:

| | | |
|--|-----|--------|
| Number of poles / for main current circuit | | 3 |
| Number of NC contacts / for main contacts | | 0 |
| Number of NO contacts / for main contacts | | 3 |
| Operating voltage / at AC-3 / rated value / maximum | V | 690 |
| Operating current | | |
| • at AC-1 / at 400 V / rated value | A | 0.32 |
| • at AC-2 / at 400 V / rated value | A | 0.3 |
| • at AC-3 / at 400 V / rated value | A | 0.3 |
| • at AC-4 / at 400 V / rated value | A | 0.3 |
| Service power | | |
| • at AC-2 / at 400 V / rated value | W | 90 |
| • at AC-3 | | |
| • at 400 V / rated value | W | 90 |
| • at 500 V / rated value | W | 120 |
| • at 690 V / rated value | W | 120 |
| • at AC-4 / at 400 V / rated value | W | 90 |
| Off-load operating frequency | 1/h | 10,000 |
| Frequency of operation | | |
| • at AC-1 / according to IEC 60947-6-2 / maximum | 1/h | 1,000 |

- at AC-2 / according to IEC 60947-6-2 / maximum
- at AC-3 / according to IEC 60947-6-2 / maximum
- at AC-4 / according to IEC 60947-6-2 / maximum

| | |
|-----|-----|
| 1/h | 750 |
| 1/h | 750 |
| 1/h | 250 |

Control circuit:

| | | |
|--|----|----|
| Type of voltage / of the controlled supply voltage | | DC |
| Control supply voltage frequency | | |
| • 1 / rated value | Hz | 0 |
| Control supply voltage / 1 | | |
| • for DC / rated value | V | 24 |
| Holding power / of the solenoid / for DC | W | 4 |

Auxiliary circuit:

| | | |
|---|--|-----|
| Product extension / auxiliary switch | | Yes |
| Number of NC contacts / for auxiliary contacts | | 0 |
| Number of NO contacts / for auxiliary contacts | | 1 |
| Number of change-over switches / for auxiliary contacts | | 0 |

Inputs/ Outputs:

| | | |
|--------------------------|--|---|
| Number of digital inputs | | 0 |
|--------------------------|--|---|

Short-circuit:

| | | |
|---|---|------------------|
| Product function / short circuit protection | | Yes |
| Design of the short-circuit protection | | circuit-breakers |
| Breaking capacity limit short-circuit current (Icu) | | |
| • at 400 V / rated value | A | 100,000 |
| • at 500 V / rated value | A | 100,000 |
| • at 690 V / rated value | A | 100,000 |

Installation/mounting/dimensions:

| | | |
|---|----|--|
| Built in orientation | | vertical |
| Type of mounting | | for snapping onto 60 mm busbar systems |
| Width | mm | 45 |
| Height | mm | 200 |
| Depth | mm | 155.1 |
| Center line spacing | mm | 60 |
| Distance, to be maintained, to the ranks assembly | | |
| • forwards | mm | 0 |
| • backwards | mm | 0 |
| • upwards | mm | 20 |
| • downwards | mm | 30 |
| • sideways | mm | 0 |

| | | |
|--|----|----|
| Distance, to be maintained, to earthed part | | |
| • forwards | mm | 0 |
| • backwards | mm | 0 |
| • upwards | mm | 20 |
| • downwards | mm | 10 |
| • sideways | mm | 9 |
| Distance, to be maintained, conductive elements | | |
| • forwards | mm | 0 |
| • backwards | mm | 0 |
| • upwards | mm | 20 |
| • downwards | mm | 10 |
| • sideways | mm | 9 |

Connections:

| | | |
|--|--|--|
| Design of the electrical connection | | |
| • for main current circuit | | screw-type terminals |
| • for auxiliary and control current circuit | | screw-type terminals |
| Type of the connectable conductor cross-section | | |
| • for main contacts | | |
| • solid | | 2x (0.5 ... 1.5 mm ²), 2x (0.75 ... 2.5 mm ²), 2x (1 ... 4 mm ²) |
| • stranded | | 2x (0.5 ... 1.5 mm ²), 2x (0.75 ... 2.5 mm ²), 2x (1 ... 4 mm ²) |
| • finely stranded | | |
| • with conductor end processing | | 2x (0.5 ... 1.5 mm ²), 2x (0.75 ... 2.5 mm ²) |
| • for AWG conductors / for main contacts | | 2x (20 ... 16), 2x (18 ... 14), 2x 12 |
| • for auxiliary contacts | | |
| • solid | | 2x (0.5 ... 1.5 mm ²), 2x (0.75 ... 2.5 mm ²), 2x 4 mm ² |
| • finely stranded | | |
| • with conductor end processing | | 2x (0.5 ... 1.5 mm ²), 2x (0.75 ... 2.5 mm ²) |
| • for AWG conductors / for auxiliary contacts | | 2x (20 ... 16), 2x (18 ... 14), 2x 12 |

Certificates/approvals:

| | | |
|---|--|---------------------|
| Verification of suitability | | CE / UL / CSA / CCC |
| Varification of suitability / ATEX | | No |

| | | |
|---------------------------------|---------------------------------------|--------------------------|
| General Product Approval | For use in hazardous locations | Test Certificates |
|---------------------------------|---------------------------------------|--------------------------|

[ROSTEST](#)



[DEKRA EXAM, DMT](#)

[Manufacturer](#)

Shipping Approval

other



ABS



PRS



RINA

[Manufacturer](#)

[other](#)

UL/CSA ratings

Operating current (FLA) / for three-phase squirrel cage motors

- at 480 V / rated value
- at 600 V / rated value

A

0.32

A

0.32

Contact rating designation / for auxiliary contacts / according to UL

A600 / Q600

Safety:

B10 value / with high demand rate

- according to SN 31920

1,000,000

Failure rate (FIT value) / with low demand rate

- according to SN 31920

FIT

150

Proportion of dangerous failures

- with low demand rate / according to SN 31920
- with high demand rate / according to SN 31920

%

40

%

75

T1 value / for proof test interval or service life

- according to IEC 61508

a

10

Protection against electrical shock

finger-safe

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

CAX-Online-Generator



<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RA2110-0DD15-1BB4/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RA2110-0DD15-1BB4

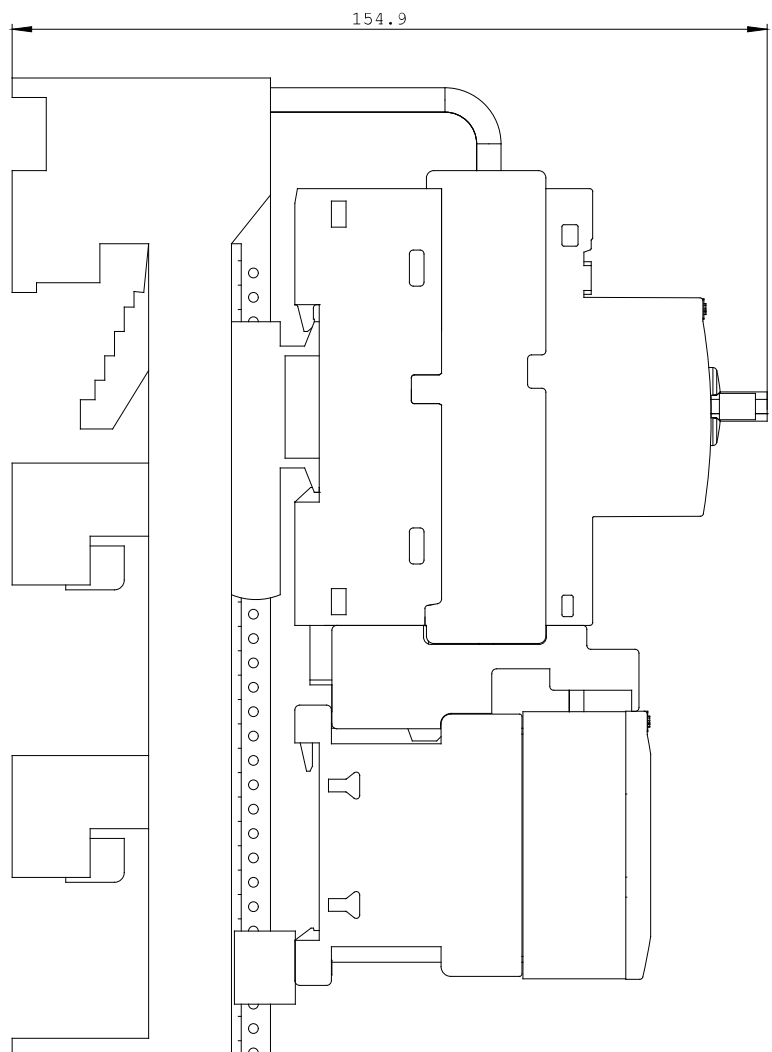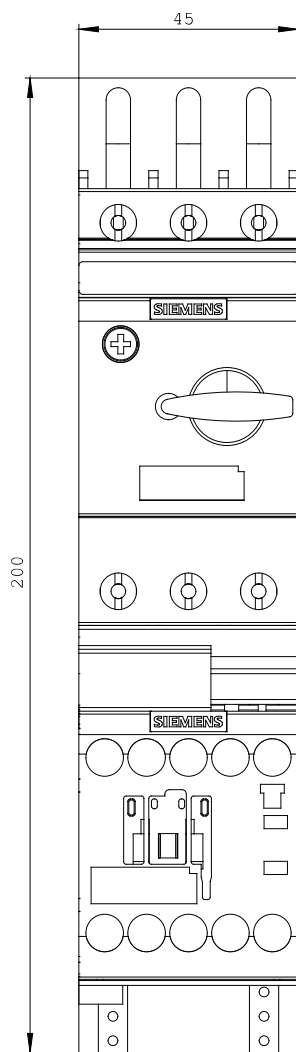



last change:

Oct 24, 2011