
SIEMENS

AUXILIARY SWITCH, 1 NC CONTACT, 1 NO CONTACT, CONNECTION AUXILIARY CIRCUIT: SPRING-LOADED TERMINAL,

General technical data:				
Product brand name		SIRIUS		
product designation	-	auxiliary switch compact feeder		
Protection class IP	-	IP20		
Relative humidity	-			
during operating phase	%	10 90		
Ambient temperature				
during transport	°C	-55 80		
during storage	°C	-55 80		
during operating	°C	-20 60		
Item designation				
according to DIN EN 61346-2		К		
 according to DIN 40719 extendable after IEC 204-2 / according to IEC 750 		К		
Auxiliary circuit:				
Number of NC contacts				
• for auxiliary contacts	_	1		
Number of NO contacts				
for auxiliary contacts		1		
Installation/mounting/dimensions:				
Width	mm	45		
Height	mm	32		
Depth	mm	25		
Connections:				
Wire stripping length	mm	10		
Wire stripping length				
Design of the electrical connection	-			
		spring-loaded terminals		
Design of the electrical connection		spring-loaded terminals		

 finely stranded 						
with conductor end processing			2x (0.25 1.5 mm²)			
• without conductor final cutting		2x (0.25 2.5 mm²)				
Type of the connectable conductor cross conductors	s-section / for AWG	_				
 for auxiliary contacts 		2x (24 14)				
Certificates/approvals:						
Verification of suitability		IEC / EN 60947-6-2				
General Product Approval	Functional Safety / S	ty / Safety of Machinery				
ROSTEST CSA	other					
Shipping Approval				other		
BUREAU VERITAS	PRS	RINA		Manufacturer	<u>other</u>	
Further information:						
Information- and Downloadcenter (Catalogs, Brochures,) http://www.siemens.com/industrial-controls/catalogs						
Industry Mall (Online ordering system) http://www.siemens.com/industrial-controls/r	mall					
CAx-Online-Generator http://www.siemens.com/cax						
Service&Support (Manuals, Certificates, http://support.automation.siemens.com/WW)				
Image database (product images, 2D dim http://www.automation.siemens.com/bilddb/			ircuit dia	grams,)		

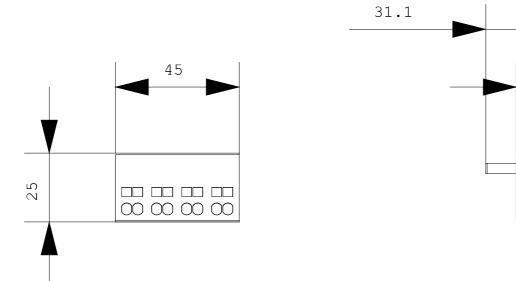

last change:

Oct 24, 2011

20