

HYBRID LINK MODULE,  
ELECTRICAL AND MECHANICAL,  
FOR 3RV2.1 SCREW TERMINALS AND 3RT2.1 SPRING-  
LOADED TERMINALS,  
(MULTI-UNIT PACKAG.)

### General technical data:

Product brand name		SIRIUS
product designation		hybrid link module
Size of the circuit-breaker		S00
Size of the contactor		S00
Design of the product		actuating voltage contactor: AC and DC
Acceptability for application		contactor S00 spring-loaded terminal - circuit breaker S00 - screw terminal

### Installation/mounting/dimensions:

Type of mounting		Screw fixing in circuit breaker, pluggable in contactor
Width	mm	45
Height	mm	41.7
Depth	mm	82.8

### Certificates/approvals:

## General Product Approval



[ROSTEST](#)



## Test Certificates

[Manufacturer](#)

[other](#)

## Shipping Approval



GL



LRS



RMRS

other

[Manufacturer](#)

[other](#)

## Further information:

### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

### Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

### CAX-Online-Generator



<http://www.siemens.com/cax>

### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RA2911-2F/all>

### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3RA2911-2F](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RA2911-2F)

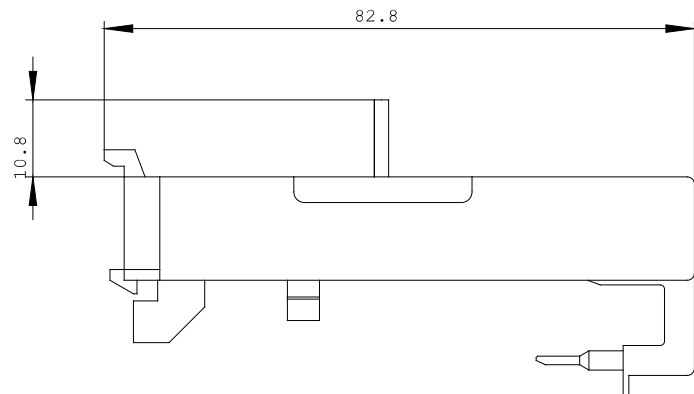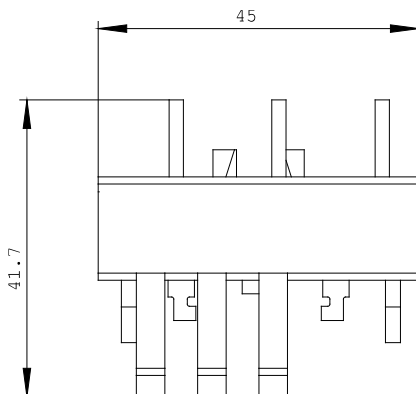

last change:

Oct 21, 2011