

LINK MODULE,  
SCREW ELECTRICAL AND MECHANICAL,  
FOR 3RV2.2 AND 3RT2.2,  
DC OPERATION OR 3RW3 SOFT STARTER OR 3RF34  
SOLID-STATE CONTACTOR

### General technical data:

Product brand name		SIRIUS
product designation		link module
Size of the circuit-breaker		S00, S0
Size of the contactor		S0
Design of the product		actuating voltage contactor: DC
Acceptability for application		contactor S0 DC - circuit breaker S00 / S0 - screw terminal

### Installation/mounting/dimensions:

Type of mounting		screw fixing
Width	mm	45
Height	mm	43
Depth	mm	83

### Certificates/approvals:

<b>General Product Approval</b>	<b>Test Certificates</b>	
<a href="#">ROSTEST</a>	<a href="#">Manufacturer</a>	<a href="#">other</a>
<b>Shipping Approval</b>		
 ABS	 DNV	 GL
		 LRS
		 PRS
		 RINA
<b>Shipping Approval</b>	<b>other</b>	
 RMRS	<a href="#">Manufacturer</a>	<a href="#">other</a>

#### Further information:

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

##### Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

##### CAX-Online-Generator



<http://www.siemens.com/cax>

##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RA2921-1BA00/all>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3RA2921-1BA00](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RA2921-1BA00)

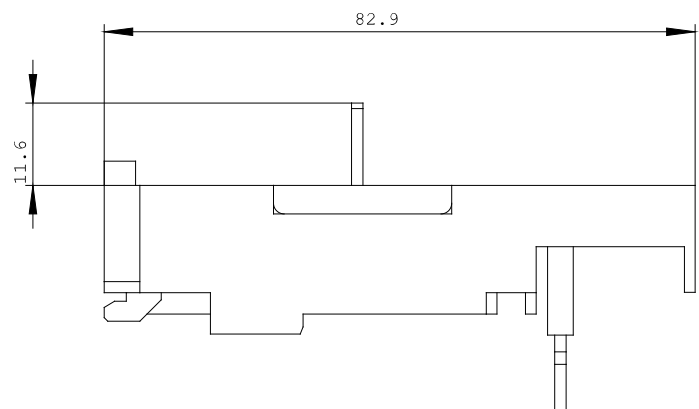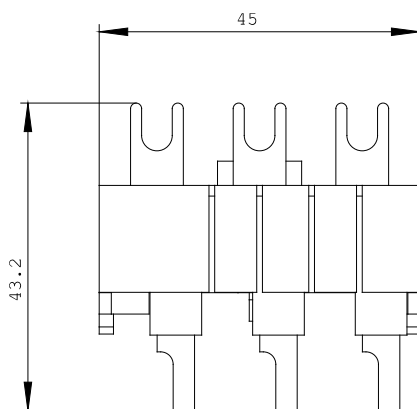

last change:

Oct 21, 2011