SIEMENS

Product data sheet 3RK3311-1AA10



SIRIUS, EXPANSION MODULE 3RK33 FOR MODULAR SAFETY SYSTEM 3RK3 8DO, 24V DC/0.5A PARAMETERIZABLE VIA SW MSS ES WIDTH 22.5MM SCREW-TYPE TERMINAL WITHOUT CONNECTING CABLE

General technical data:		
product brand name		SIRIUS
Product designation		Modular Safety System 3RK3
Design of the product		extension module 8 DO
Protection class IP		IP20
Resistance against shock		15g / 11 ms
Degree of pollution		3
mounting position		vertical
Installation altitude / at a height over sea level / maximum	m	2,000
Ambient temperature		
during storage	°C	-40 +85
during operating	°C	-20 +60
during transport	°C	-40 +85
Relative humidity		
during operating phase	%	10 95
Conductor-bound parasitic coupling BURST / according to IEC 61000-4-4		2 kV (power ports)
Conductor-bound parasitic coupling conductor-earth SURGE / according to IEC 61000-4-5		2 kV
Conductor-bound parasitic coupling conductor-conductor SURGE / according to IEC 61000-4-5		1 kV

Electrostatic discharge / according to IEC 61000-4-2		4 kV contact discharge / 8 kV air discharge
Field-bound parasitic coupling / according to IEC 61000-4-3		10 V/m, 3 V/m, 1 V/m
Impulse voltage resistance / rated value	V	500
Insulation voltage / rated value	V	50
Reference code / according to DIN 40719 extended according to IEC 204-2 / according to IEC 750		К
Reference code / according to DIN EN 61346-2		К
Product function		
emergency stop function		No
• protective door monitoring		No
 evaluation: contact-free acting protection device 		No
• evaluation: selector switch		No
• step mat monitoring		No
evaluation: two-hand control panel		No
evaluation: enabling switch		No
monitored start-up		No

Control circuit/ Control:		
Type of voltage		DC
Control supply voltage / 1 / for DC / rated value	V	24
Operating range factor control supply voltage rated value		
• of the solenoid		0.85 1.15

Auxiliary circuit:	
Product function	
outputs parameterisable	Yes
Number of inputs	
safety-related	0
not safety-related	0
Number of outputs	
as contact-affected switching element / safety-related	
• 1-channel	0
• 2-channel	0
as contact-less semiconductor switching element	
• safety-related / 2-channel	0
• not safety-oriented / 2-channel	0
• to the test of contact afflicated sensors	0

Installation/ mounting/ dimensions:		
Mounting type		standard rail
Width	mm	22.5

Height	mm	102
Depth	mm	124

Connections/ terminals:		
Product function / removable terminal for auxiliary and control circuit		Yes
Design of the electrical connection / for auxiliary and control current circuit		screw-type terminals
Connectable conductor cross-section / for auxiliary contacts		
• single- or multi-stranded	mm²	0.5 4
• finely stranded		
 with conductor end processing 	mm²	0.5 2.5

Certificates/ approvals:

General Product Approval













EMC

Functional Safety / Safety of Machinery Declaration of Conformity Test Certificates

other

PROFII°

Environmental Confirmations

other



Special Test Certificate Confirmation

_ ***

Profibus

Safety related data:

Protection against electrical shock

finger-safe

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/industrial-controls/catalogs

Industry Mall (Online ordering system)

http://www.siemens.com/industrymall

Cax online generator


http://www.siemens.com/cax


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

http://support.automation.siemens.com/WW/view/en/3RK3311-1AA10/all

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RK3311-1AA10

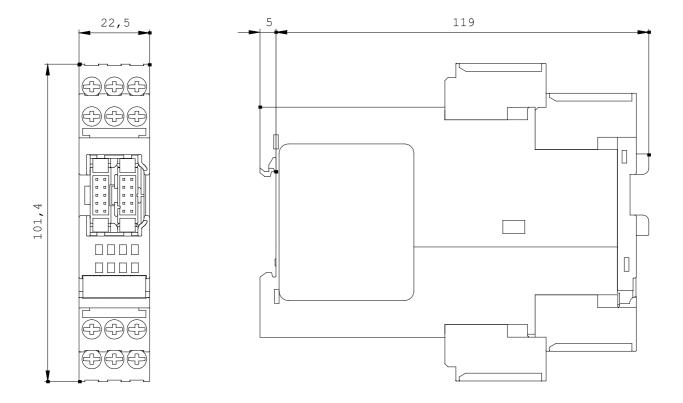

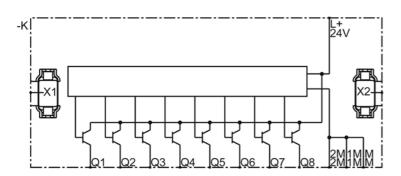

last change: Sep 22, 2014