

SAFETY TRANSFORMER, 40VA PRIM 230V AC,50HZ,
SEK 2X12V / 24V AC WITH PTC PROT.,5MW



Model		
product brand name		SETRON
Design of the transformer		Safety transformer
General technical data		
Active power supplied / maximum	W	40
Voltage		
Output voltage		
• _1 / Rated value	V	12
• _2 / Rated value	V	24
Dissipation		
Active power loss		
• maximum	W	7.7
Electricity		
Output current		
• maximum	A	3.3
• _1 / Rated value	A	3.3
• _2 / Rated value	A	1.6

Suitability

Suitability for integration

- surface-mounted installation
- flush mounting

No

No

Appearance

Product details

Product component

- switch

No

Product function

Product function

- Thermal protection

Yes

Inputs Outputs

Property of the output / Short-circuit proof

Yes

Mechanical Design

Height

mm

64

Width

mm

90

Length

mm

90

Number of width units

5

Mounting type

- Side-by-side mounting

Yes

General Product Approval



Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/4AC37400>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/4AC37400/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=4AC37400

CAX-Online-Generator


<http://www.siemens.com/cax>

Tender specifications

<http://ausschreibungstexte.siemens.com/tiplv>

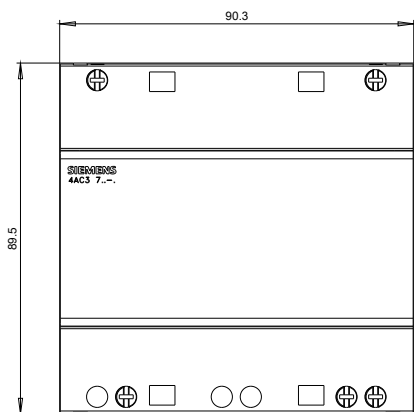

last modified:

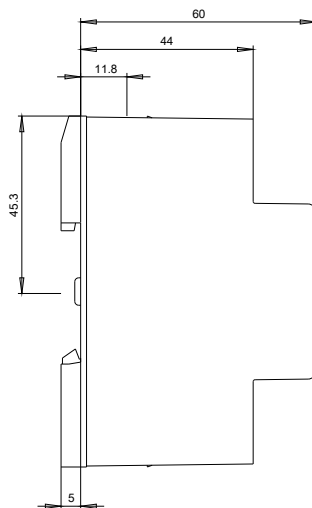

21.10.2014