

OPERATOR PANEL TI-GREY; INSTALLATION INTO CONTROL CABINET DOOR OR FRONT PLATE; CAN BE PLUGGED ONTO THE BASIC UNIT OR EXPANSION MODULE; 10 LEDS FOR STATUS DISPLAY AND 5 USER-ASSIGNABLE KEYS FOR MANUAL CONTROL



Figure similar

product brandname	SIRIUS
Product designation	operator panels
General technical data	
Insulation voltage	
• rated value	300 V
Surge voltage resistance rated value	4 000 V
Protection class IP	
• on the front	IP54
Vibration resistance	1-6 Hz / 15 mm; 6-500 Hz / 2 g
Equipment marking	
• acc. to DIN EN 61346-2	A
• acc. to DIN EN 81346-2	A
Electromagnetic compatibility	
EMC emitted interference	
• acc. to IEC 60947-1	class A
EMI immunity acc. to IEC 60947-1	corresponds to degree of severity 3
Conducted interference	

- due to burst acc. to IEC 61000-4-4
- due to conductor-earth surge acc. to IEC 61000-4-5
- due to conductor-conductor surge acc. to IEC 61000-4-5

1 kV
2 kV
1 kV

Field-bound parasitic coupling acc. to IEC 61000-4-3

10 V/m

Installation/ mounting/ dimensions

Mounting position	any
Mounting type	front mounting
Height	36 mm
Width	96 mm
Depth	44 mm

Ambient conditions

Installation altitude at height above sea level maximum	4 000 m
Ambient temperature • during operation • during storage • during transport	-25 ... +60 °C -40 ... +80 °C -40 ... +80 °C
Environmental category during operation acc. to IEC 60721	3K6 (no formation of ice, no condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6

Certificates/approvals

General Product Approval

Declaration of
Conformity

Test Certificates

Shipping
Approval



[spezielle
Prüfbescheinigunge
n](#)

[Typprüfbescheinigu
ng/Werkszeugnis](#)



Shipping Approval

other



[Bestätigungen](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)



<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3UF7200-1AA01-0>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3UF7200-1AA01-0>

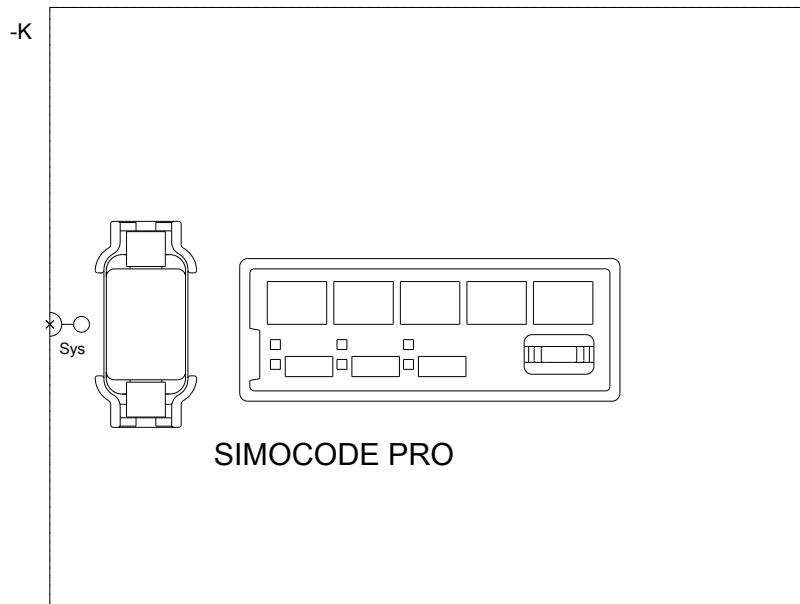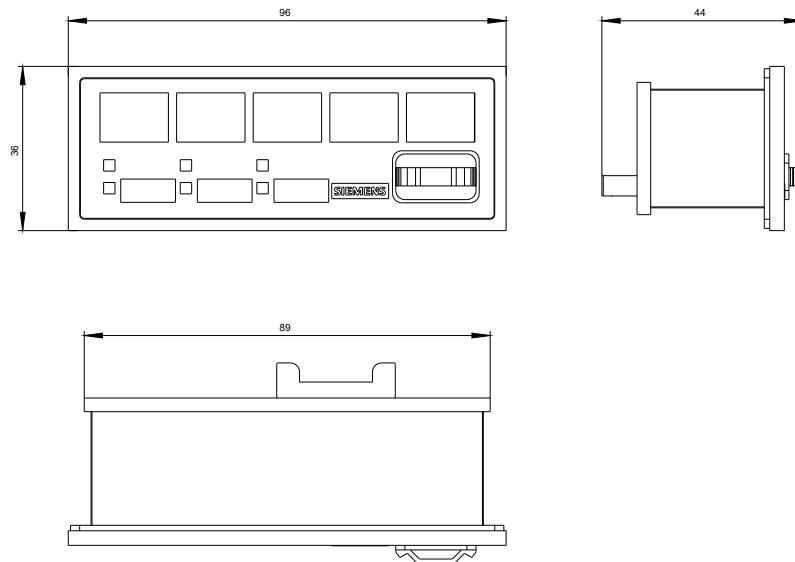

last modified:

02/06/2017