

HYBRID LINK MODULE ELECTRICAL AND MECHANICAL
FOR 3RV2.2 SCREW TERMINALS AND 3RT2.2 SPRING-
LOADED TERMINALS,
(MULTI-UNIT PACKAG.)






General technical data:

Product brand name		SIRIUS
product designation		hybrid link module
Size of the circuit-breaker		S0
Size of the contactor		S0
Design of the product		actuating voltage contactor: AC and DC
Acceptability for application		contactor S00 spring-loaded terminal - circuit breaker S00 - screw terminal

Installation/mounting/dimensions:

Type of mounting		Screw fixing in circuit breaker, pluggable in contactor
Width	mm	45
Height	mm	50
Depth	mm	105.4

Certificates/approvals:

General Product Approval	Test Certificates				
ROSTEST	Manufacturer	other			
Shipping Approval					other
 ABS	 DNV	 GL	 LRS	 RMRS	other

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

CAX-Online-Generator



<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RA2921-2F/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RA2921-2F

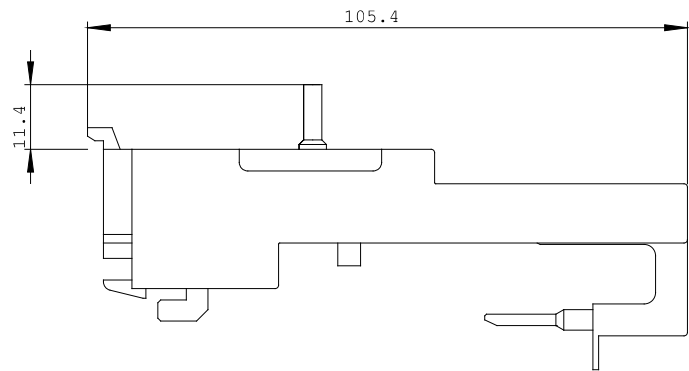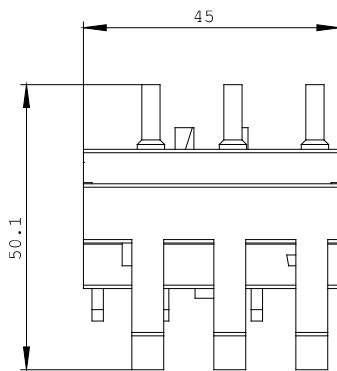

last change:

Oct 21, 2011