

3DI/LC module (conn. terminals) for ET 200SP motor starter



Figure similar

Product designation	3DI/LC control module
Design of the product	Accessories
General technical data:	
Product function	Accessories
Degree of pollution	2
Protection class IP	IP20
Shock resistance	6g / 11 ms
Vibration resistance	15 mm to 6 Hz; 2g to 500 Hz
Inputs/ Outputs:	
Product function	Yes
• digital inputs parameterizable	
Number of digital inputs	4
Installation/ mounting/ dimensions:	
Mounting position	vertical, horizontal, flat
Mounting type	Can be plugged onto motor starters
Height	54.5 mm
Width	30 mm

Depth	42.3 mm
-------	---------

Ambient conditions:

Installation altitude at height above sea level maximum	2 000 m
Ambient temperature	
• during operation	-25 ... +60 °C
• during storage	-40 ... +70 °C
• during transport	-40 ... +70 °C
Relative humidity during operation	10 ... 95 %
Air pressure	
• acc. to SN 31205	900 ... 1 060 hPa

Connections/ Terminals:

Type of electrical connection	
• for auxiliary and control current circuit	PUSH-IN connection (spring-loaded connection)

Certificates/approvals

General Product Approval	Declaration of Conformity	Test Certificates	other
 CSA	 UL	 EG-Konf.	Typprüfbescheinigung/Werkszeugnis Bestätigungen

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK19081AA000BP0>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK19081AA000BP0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RK19081AA000BP0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK19081AA000BP0&lang=en

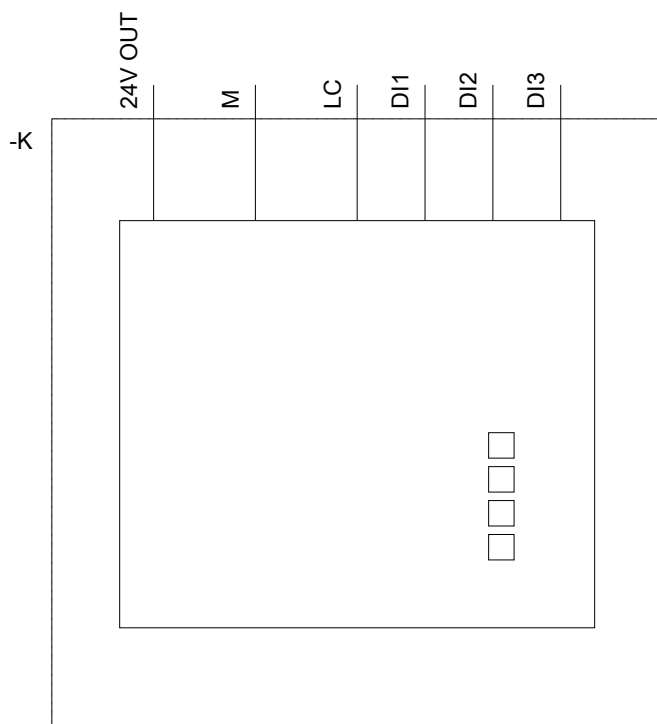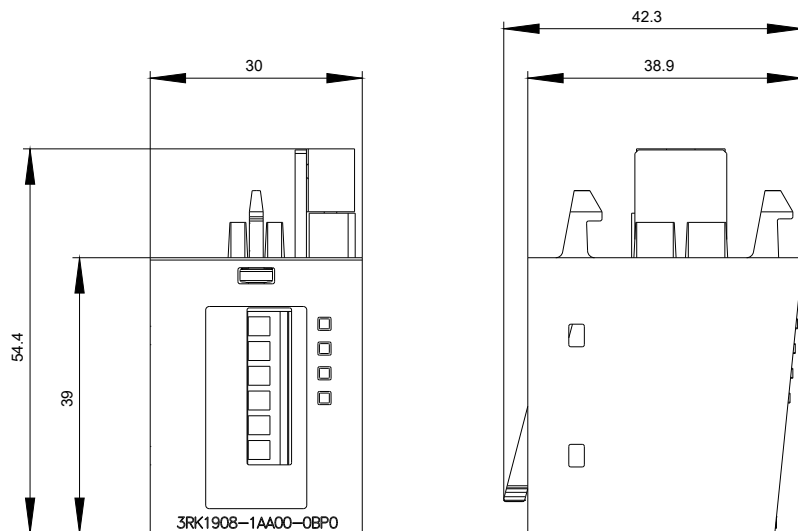

last modified:

20.06.2016