SIEMENS

Product data sheet

5SY4613-7



Similar to image

Technical data:		
Overvoltage class		3
type of voltage	_	AC/DC
Tripping characteristic class		С
Degree of pollution		3
Mounting depth	mm	70
Energy limiting class		3
Number of poles		4
Number of pitch units for width		4
Product function / n-switching		Yes
Supply voltage frequency / rated value	Hz	50
Switching capacity current / in accordance with IEC 60947-2 / rated value	kA	20
Breaking capacity current / acc. to EN 60898 / rated value	kA	10
Supply voltage / for AC / rated value	V	400
Current / for AC / rated value	А	13
Protection class IP		IP20, with connected conductors
Product extension / can be installed / supplementary device		Yes
power loss		-

CIRCUIT BREAKER 400V 10KA, 3+N-POLE, C, 13A, D=70MM


	-
-	-
	-
	-
-	-
-	-
-	-
	-
	-
А	13
А	12.35
А	12.09
А	11.7
А	11.31
А	11.05
	150m/s² at 11ms half-sine
	A A A


Certificates/approvals:
General Product Approval
IMQ ROSTEST

coc	<u></u>					
Shipping Approva	I				other	
B U R E A U V R I TAS		GL	Lloyd's Kegister	RINA	other	

Further information:	
Information- and Downloadcenter (Catalogs, Brochures,) http://www.siemens.com/lowvoltage/catalogs	
Industry Mall (Online ordering system) http://www.siemens.com/lowvoltage/mall	
Service&Support (Manuals, Certificates, Characteristics, FAQs,) http://support.automation.siemens.com/WW/view/en/5SY4613-7/all	
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams,) http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SY4613-7	

CAx-Online-Generator http://www.siemens.com/cax

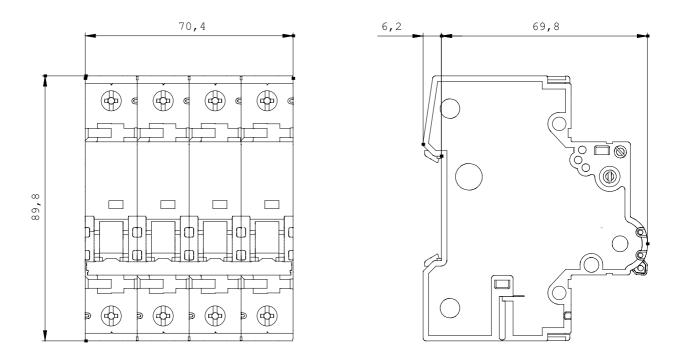

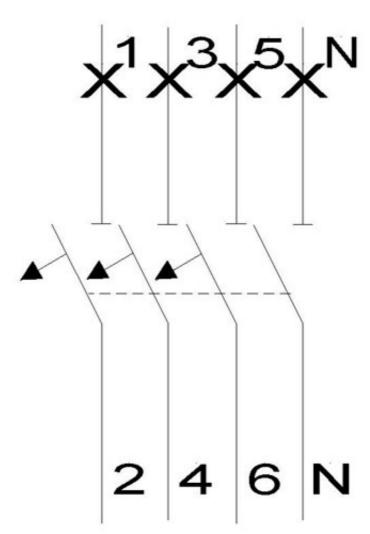

last change: