SIEMENS

Product data sheet 3KD9103-1

ACCESSORY FOR 3KD SIZE 1 AND 2 AUXILIARY SWITCH,

1 CHANGE OVER WITH 50CM CONNECTING CABLES



Similar to image

product brand nameSENTRONNumber of NC contacts / for auxiliary contacts0• instantaneous switching0Number of NO contacts / for auxiliary contacts0• instantaneous switching0Number of changeover contacts / of the auxiliary contacts1• instantaneous switching1Operating current / of the auxiliary contacts4• at AC-12 / at 230 VA• at DC-13 / at 230 VA• at AC-15 / at 230 VA• at AC-15 / at 230 VA	General technical details:			
instantaneous switching Number of NO contacts / for auxiliary contacts instantaneous switching Number of changeover contacts / of the auxiliary contacts instantaneous switching 1 Operating current / of the auxiliary contacts at AC-12 / at 230 V at DC-13 / at 230 V A 5 at DC-13 / at 230 V A 0.2	product brand name		SENTRON	
Number of NO contacts / for auxiliary contacts • instantaneous switching Number of changeover contacts / of the auxiliary contacts • instantaneous switching 1 Operating current / of the auxiliary contacts • at AC-12 / at 230 V • at DC-13 / at 230 V A 0.2	Number of NC contacts / for auxiliary contacts			
instantaneous switching Number of changeover contacts / of the auxiliary contacts instantaneous switching 1 Operating current / of the auxiliary contacts at AC-12 / at 230 V at DC-13 / at 230 V A 5 A 0.2	• instantaneous switching		0	
Number of changeover contacts / of the auxiliary contacts • instantaneous switching 1 Operating current / of the auxiliary contacts • at AC-12 / at 230 V • at DC-13 / at 230 V A 0.2	Number of NO contacts / for auxiliary contacts			
instantaneous switching Operating current / of the auxiliary contacts at AC-12 / at 230 V at DC-13 / at 230 V A O.2	• instantaneous switching		0	
Operating current / of the auxiliary contacts • at AC-12 / at 230 V A 5 • at DC-13 / at 230 V A 0.2	Number of changeover contacts / of the auxiliary contacts			
• at AC-12 / at 230 V • at DC-13 / at 230 V A 5 A 0.2	• instantaneous switching		1	
• at DC-13 / at 230 V A 0.2	Operating current / of the auxiliary contacts			
	• at AC-12 / at 230 V	А	5	
• at AC-15 / at 230 V A 2	• at DC-13 / at 230 V	Α	0.2	
	• at AC-15 / at 230 V	Α	2	

Dimensions and weights:		
Net weight	g	24.6

Certificates/approvals:

General Product Approval



Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)

https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/3KD9103-1

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


http://support.automation.siemens.com/WW/view/en/3KD9103-1/all


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3KD9103-1

CAx-Online-Generator

http://www.siemens.com/cax

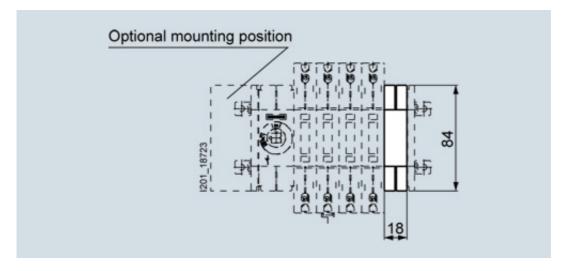



last change: Apr 21, 2014