SIEMENS

Product data sheet 5SY4210-5



CIRCUIT BREAKER 400V 10KA, 2-POLE, A, 10A, D=70MM

Similar to image

Tashvical data		
Technical data:		
Overvoltage class		3
type of voltage		AC/DC
Tripping characteristic class		А
Degree of pollution		3
Mounting depth	mm	70
Energy limiting class		3
Number of poles		2
Number of pitch units for width		2
Product function / n-switching		No
Supply voltage frequency / rated value	Hz	50
Switching capacity current / in accordance with IEC 60947-2 / rated value	kA	20
Breaking capacity current / acc. to EN 60898 / rated value	kA	10
Supply voltage / for AC / rated value	V	400
Current / for AC / rated value	А	10
Protection class IP		IP20, with connected conductors
Product extension / can be installed / supplementary device		Yes
power loss		-

Rated make-break capacity Icn Rated service short-circuit breaking capacity Ics Rated ultimate short-circuit breaking capacity Icu Tripping characteristics Number Tripping characteristic/-class Conventional tripping current I2, (x In) rated current In IEC, DIN/VDE Tripping characteristic/-class Test current I4, hold (x In) rated current In / IEC, DIN/VDE • at 30 Cel • at 40 Cel • at 45 Cel A	
Rated make-break capacity Icn Rated service short-circuit breaking capacity Ics Rated ultimate short-circuit breaking capacity Icu Tripping characteristics Number Tripping characteristic/-class Conventional tripping current I2, (x In) rated current In IEC, DIN/VDE Tripping characteristic/-class Test current I4, hold (x In) rated current In / IEC, DIN/VDE • at 30 Cel • at 40 Cel • at 45 Cel A	-
Rated service short-circuit breaking capacity lcs Rated ultimate short-circuit breaking capacity lcu Tripping characteristics Number Tripping characteristic/-class Conventional tripping current I2, (x ln) rated current ln IEC, DIN/VDE Tripping characteristic/-class Test current I4, hold (x ln) rated current ln / IEC, DIN/VDE • at 30 Cel • at 40 Cel • at 45 Cel A	-
Rated ultimate short-circuit breaking capacity Icu Tripping characteristics Number Tripping characteristic/-class Conventional tripping current I2, (x In) rated current In IEC, DIN/VDE Tripping characteristic/-class Test current I4, hold (x In) rated current In / IEC, DIN/VDE • at 30 Cel • at 40 Cel • at 45 Cel A	-
Tripping characteristics Number Tripping characteristic/-class Conventional tripping current I2, (x In) rated current In IEC, DIN/VDE Tripping characteristic/-class Test current I4, hold (x In) rated current In / IEC, DIN/VDE • at 30 Cel • at 40 Cel • at 45 Cel A	-
Tripping characteristic/-class Conventional tripping current I2, (x In) rated current In IEC, DIN/VDE Tripping characteristic/-class Test current I4, hold (x In) rated current In / IEC, DIN/VDE • at 30 Cel • at 40 Cel • at 45 Cel A	-
rated current In IEC, DIN/VDE Tripping characteristic/-class Test current I4, hold (x In) rated current In / IEC, DIN/VDE • at 30 Cel • at 40 Cel • at 45 Cel A	-
Tripping characteristic/-class Test current I4, hold (x In) rated current In / IEC, DIN/VDE • at 30 Cel • at 40 Cel • at 45 Cel A	-
rated current In / IEC, DIN/VDE • at 30 Cel • at 40 Cel • at 45 Cel A	-
• at 30 Cel A • at 40 Cel A • at 45 Cel A	-
• at 40 Cel A • at 45 Cel A	
• at 45 Cel	10
	9.4
• at 50 Cel	9.1
	8.7
• at 55 Cel	8.1
• at 60 Cel	8.1
Resistance against shock / according to IEC 60068-2-27	150m/s² at 11ms half-sine

Certificates/approvals:

General Product Approval

Declaration of Conformity

other



ROSTEST





Manufacturer other

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)

http://www.siemens.com/lowvoltage/mall

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


http://support.automation.siemens.com/WW/view/en/5SY4210-5/all


 $Image\ database\ (product\ images,\ 2D\ dimension\ drawings,\ 3D\ models,\ device\ circuit\ diagrams,\ ...)$


 $\underline{\text{http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SY4210-5}}$

CAx-Online-Generator

http://www.siemens.com/cax

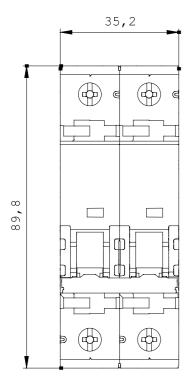

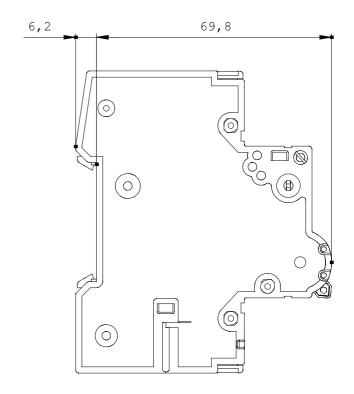

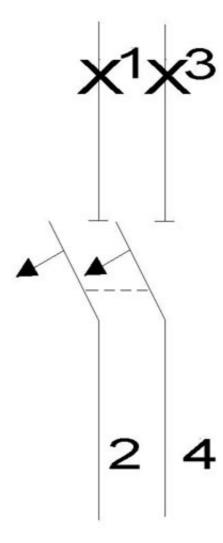

last change: Nov 3, 2011