# **SIEMENS**

Product data sheet 5SY4325-6



CIRCUIT BREAKER 400V 10KA, 3-POLE, B, 25A, D=70MM

Similar to image

Technical data:		
Overvoltage class		3
type of voltage		AC/DC
Tripping characteristic class		В
Degree of pollution		3
Mounting depth	mm	70
Energy limiting class		3
Number of poles		3
Number of pitch units for width		3
Product function / n-switching		No
Supply voltage frequency / rated value	Hz	50
Switching capacity current / in accordance with IEC 60947-2 / rated value	kA	20
Breaking capacity current / acc. to EN 60898 / rated value	kA	10
Supply voltage / for AC / rated value	V	400
Current / for AC / rated value	Α	25
Protection class IP		IP20, with connected conductors
Product extension / can be installed / supplementary device		Yes
power loss		-

	- - -
	-
	-
	-
	-
	-
	-
	-
Α	25
Α	24
Α	23.5
Α	23
Α	22.25
Α	21.75
	150m/s² at 11ms half-sine
	A A A

## **Certificates/approvals:**

#### **General Product Approval**

Declaration of Conformity



<u>IMQ</u>

ROSTEST





Manufacturer

## **Shipping Approval**

other







Regis



other

### **Further information:**

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)

http://www.siemens.com/lowvoltage/mall

 ${\bf Service \& Support \ (Manuals, \ Certificates, \ Characteristics, \ FAQs, ...)}$ 


http://support.automation.siemens.com/WW/view/en/5SY4325-6/all


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


 $\underline{\text{http://www.automation.siemens.com/bilddb/cax\_en.aspx?mlfb=5SY4325-6}}$ 

**CAx-Online-Generator** 

http://www.siemens.com/cax

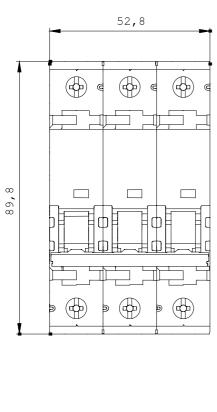

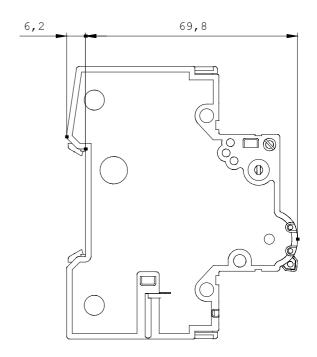

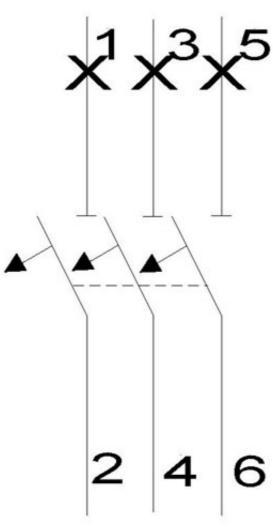

last change: Nov 3, 2011