SIEMENS

Product data sheet



CIRCUIT BREAKER 230V 10KA, 1+N-POLE, C, 1A, D=70MM

Similar to image

Technical data:		
Overvoltage class		3
type of voltage	-	AC/DC
Tripping characteristic class		C
Degree of pollution		3
Mounting depth	mm	70
Energy limiting class		3
Number of poles		2
Number of pitch units for width		2
Product function / n-switching		Yes
Supply voltage frequency / rated value	Hz	50
Switching capacity current / in accordance with IEC 60947-2 / rated value	kA	35
Breaking capacity current / acc. to EN 60898 / rated value	kA	10
Supply voltage / for AC / rated value	V	230
Current / for AC / rated value	А	1
Protection class IP		IP20, with connected conductors
Product extension / can be installed / supplementary device		Yes
power loss		-

	-
-	-
	-
	-
-	-
-	-
	-
	-
	-
А	1
А	0.95
А	0.93
А	0.9
А	0.87
А	0.85
	150m/s² at 11ms half-sine
	A A A

 Certificates/approvals:

 General Product Approval

 MQ
 ROSTEST
 Constant
 other

 Shipping Approval
 Colspan="3">Colspan="3">Other

 Shipping Approval
 Colspan="3">Colspan="3">Colspan="3">Other

 Image: Colspan="3">Colspan="3"Colspan="3">Colspan="3"Colspan="3

 Information- and Downloadcenter (Catalogs, Brochures,...)

 http://www.siemens.com/lowvoltage/catalogs

 Industry Mall (Online ordering system)

 http://www.siemens.com/lowvoltage/mall

 Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


 http://support.automation.siemens.com/WW/view/en/5SY4501-7/all


 Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


 http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SY4501-7

CAx-Online-Generator

http://www.siemens.com/cax

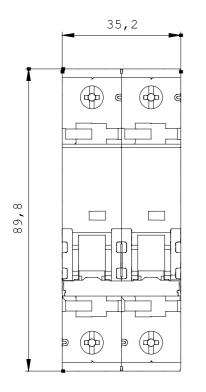

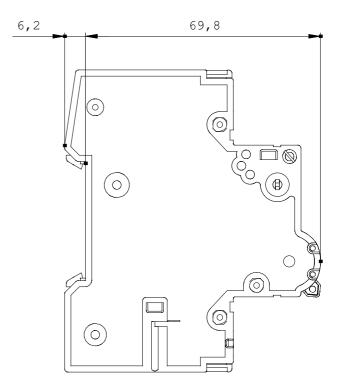

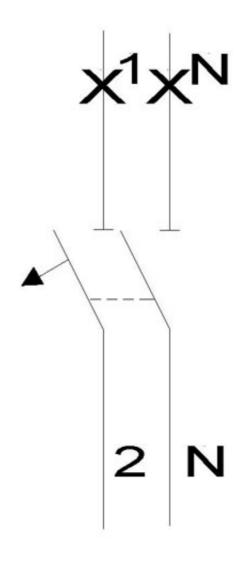

last change:

Nov 3, 2011