## **SIEMENS**

Product data sheet 5SY4513-8



CIRCUIT BREAKER 230V 10KA, 1+N-POLE, D, 13A, D=70MM

Similar to image

| Technical data:   |    |                                 |  |
|---|----|---------------------------------|--|
| Overvoltage class   |    | 3                               |  |
| type of voltage   |    | AC/DC                           |  |
| Tripping characteristic class   |    | D                               |  |
| Degree of pollution   |    | 3                               |  |
| Mounting depth  | mm | 70                              |  |
| Energy limiting class   |    | 3                               |  |
| Number of poles   |    | 2                               |  |
| Number of pitch units for width   |    | 2                               |  |
| Product function / n-switching  |    | Yes                             |  |
| Supply voltage frequency / rated value                                    | Hz | 50                              |  |
| Switching capacity current / in accordance with IEC 60947-2 / rated value | kA | 20                              |  |
| Breaking capacity current / acc. to EN 60898 / rated value                | kA | 10                              |  |
| Supply voltage / for AC / rated value                                     | V  | 230                             |  |
| Current / for AC / rated value  | А  | 13                              |  |
| Protection class IP   |    | IP20, with connected conductors |  |
| Product extension / can be installed / supplementary device               |    | Yes                             |  |
| power loss  |    | -                               |  |

| Operational voltage Um  |   | -                         |
|---|---|---------------------------|
| rated current In  |   | -                         |
| Rated make-break capacity Icn   |   | -                         |
| Rated service short-circuit breaking capacity Ics                       |   | -                         |
| Rated ultimate short-circuit breaking capacity Icu                      |   | -                         |
| Tripping characteristics Number   |   | -                         |
| Tripping characteristic/-class Conventional tripping current I2, (x In) |   | -                         |
| rated current In IEC, DIN/VDE   |   | -                         |
| Tripping characteristic/-class Test current I4, hold (x In)             |   | -                         |
| rated current In / IEC, DIN/VDE   |   |                           |
| • at 30 Cel   | Α | 13                        |
| • at 40 Cel   | Α | 12.35                     |
| • at 45 Cel   | Α | 12.09                     |
| • at 50 Cel   | Α | 11.7                      |
| • at 55 Cel   | Α | 11.31                     |
| • at 60 Cel   | Α | 11.05                     |
| Resistance against shock / according to IEC 60068-2-27                  |   | 150m/s² at 11ms half-sine |

## **Certificates/approvals:**

## **General Product Approval**



**IMQ** 

**ROSTEST** 



**Shipping Approval** 









other other

## **Further information:**

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)

http://www.siemens.com/lowvoltage/mall

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


http://support.automation.siemens.com/WW/view/en/5SY4513-8/all


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax\_en.aspx?mlfb=5SY4513-8

**CAx-Online-Generator** 

http://www.siemens.com/cax

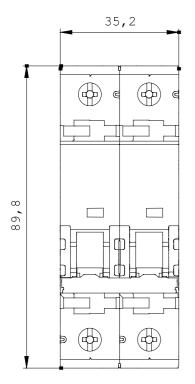

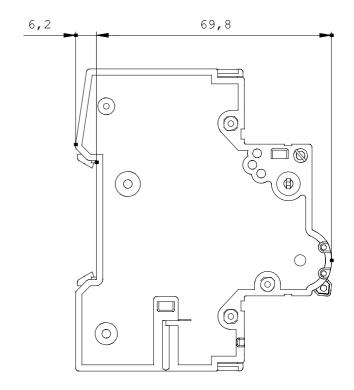

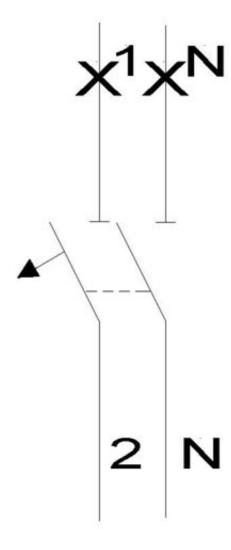

last change: Nov 3, 2011