SIEMENS

Product data sheet

5SY4610-8



Similar to image

Technical data:		
Overvoltage class		3
type of voltage		AC/DC
Tripping characteristic class	_	D
Degree of pollution		3
Mounting depth	mm	70
Energy limiting class		3
Number of poles		4
Number of pitch units for width		4
Product function / n-switching		Yes
Supply voltage frequency / rated value	Hz	50
Switching capacity current / in accordance with IEC 60947-2 / rated value	kA	20
Breaking capacity current / acc. to EN 60898 / rated value	kA	10
Supply voltage / for AC / rated value	V	400
Current / for AC / rated value	А	10
Protection class IP		IP20, with connected conductors
Product extension / can be installed / supplementary device		Yes
power loss		-

CIRCUIT BREAKER 400V 10KA, 3+N-POLE, D, 10A, D=70MM

	-
	-
	-
	-
	-
	-
	-
	-
	-
А	10
А	9.4
А	9.1
А	8.7
А	8.1
А	8.1
	150m/s² at 11ms half-sine
	A A A

Certificates/approvals: **General Product Approval** IMQ ROSTEST CQC cqc **Shipping Approval** other other LRS B U R E A U VERITAS **Further information:**

Information- and Downloadcenter (Catalogs, Brochures,...) http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system) http://www.siemens.com/lowvoltage/mall


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


http://support.automation.siemens.com/WW/view/en/5SY4610-8/all

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...) http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SY4610-8

CAx-Online-Generator

http://www.siemens.com/cax

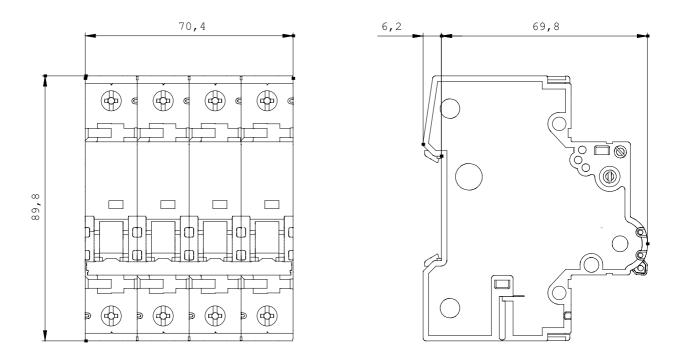

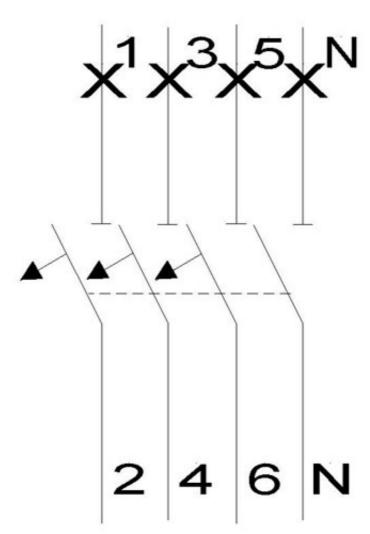

last change: