SIEMENS

Product data sheet

5SY4604-7



Similar to image

Technical data:		
Overvoltage class		3
type of voltage	-	AC/DC
Tripping characteristic class	-	С
Degree of pollution		3
Mounting depth	mm	70
Energy limiting class		3
Number of poles		4
Number of pitch units for width		4
Product function / n-switching		Yes
Supply voltage frequency / rated value	Hz	50
Switching capacity current / in accordance with IEC 60947-2 / rated value	kA	35
Breaking capacity current / acc. to EN 60898 / rated value	kA	10
Supply voltage / for AC / rated value	V	400
Current / for AC / rated value	А	4
Protection class IP		IP20, with connected conductors
Product extension / can be installed / supplementary device		Yes
power loss		-

CIRCUIT BREAKER 400V 10KA, 3+N-POLE, C, 4A, D=70MM

	-
-	-
-	-
-	-
-	-
-	-
	-
-	-
	-
-	
А	4
А	3.8
А	3.72
А	3.6
А	3.48
А	3.4
	150m/s² at 11ms half-sine
	A A A


Certificates/approvals:


 General Product Approval

 IMQ
 ROSTEST
 Implies
 Implies

Information- and Downloadcenter (Catalogs, Brochures,) http://www.siemens.com/lowvoltage/catalogs	
Industry Mall (Online ordering system) http://www.siemens.com/lowvoltage/mall	
Service&Support (Manuals, Certificates, Characteristics, FAQs,) http://support.automation.siemens.com/WW/view/en/5SY4604-7/all	
http://support.automation.siemens.com/WW/view/en/5SY4604-7/all Image database (product images, 2D dimension drawings, 3D models, dev http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SY4604-7	ice circuit diagrams,)

CAx-Online-Generator

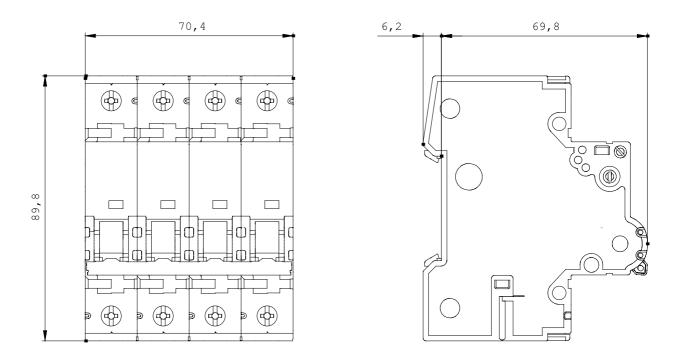

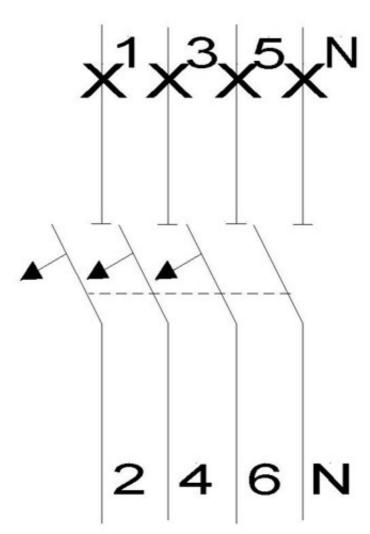

last change: