SIEMENS

Product data sheet

5SY7616-7



Similar to image

Technical data:		
Overvoltage class		3
type of voltage		AC/DC
Tripping characteristic class		C
Degree of pollution		3
Mounting depth	mm	70
Energy limiting class		3
Number of poles		4
Number of pitch units for width		4
Product function / n-switching		Yes
Supply voltage frequency / rated value	Hz	50
Switching capacity current / in accordance with IEC 60947-2 / rated value	kA	25
Breaking capacity current / acc. to EN 60898 / rated value	kA	15
Supply voltage / for AC / rated value	V	400
Current / for AC / rated value	А	16
Protection class IP		IP20, with connected conductors
Product extension / can be installed / supplementary device		Yes
power loss		-

CIRCUIT BREAKER 400V 15KA, 3+N-POLE, C, 16A, D=70MM

	-
-	-
-	-
-	-
-	-
-	-
	-
-	-
-	-
-	
А	16
А	15.2
А	14.88
А	14.4
А	13.92
А	13.6
	150m/s ² at 11ms half-sine
	A A A

Certificates/approvals:


 General Product Approval


 MQ
 ROSTEST
 Implies
 Implies

Further information:	
Information- and Downloadcenter (Catalogs, Brochures,) http://www.siemens.com/lowvoltage/catalogs	
Industry Mall (Online ordering system) http://www.siemens.com/lowvoltage/mall	
Service&Support (Manuals, Certificates, Characteristics, FAQs,) http://support.automation.siemens.com/WW/view/en/5SY7616-7/all	
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams,) http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SY7616-7	

CAx-Online-Generator

http://www.siemens.com/cax

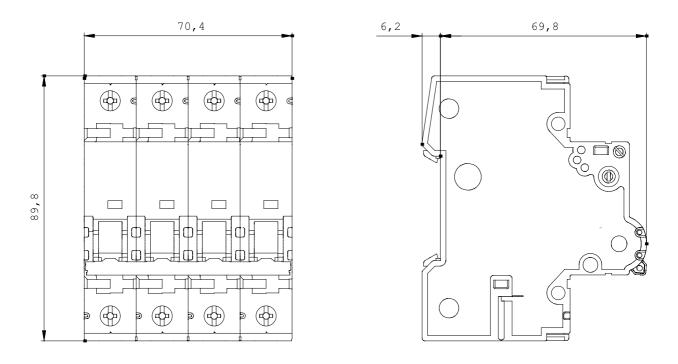

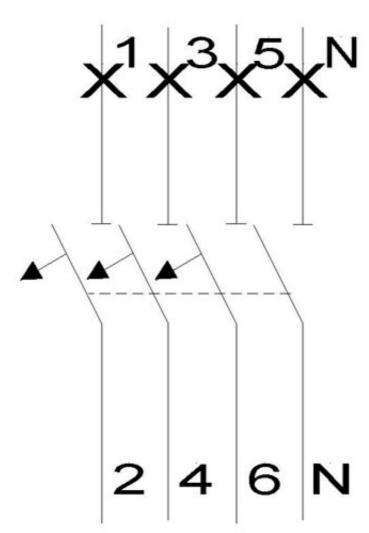

last change: