SIEMENS

Product data sheet



CIRCUIT BREAKER 230V 6KA,1+N-POLE C, 32A, D=70MM

Similar to image

| Technical data: | | |
|---|----|---------------------------------|
| Overvoltage class | | 3 |
| type of voltage | | AC/DC |
| Tripping characteristic class | | C |
| Degree of pollution | | 3 |
| Mounting depth | mm | 70 |
| Energy limiting class | _ | 3 |
| Number of poles | _ | 2 |
| Number of pitch units for width | | 2 |
| Product function / n-switching | | Yes |
| Supply voltage frequency / rated value | Hz | 50 |
| Switching capacity current / in accordance with IEC 60947-2 / rated value | kA | 15 |
| Breaking capacity current / acc. to EN 60898 / rated value | kA | 6 |
| Supply voltage / for AC / rated value | V | 230 |
| Current / for AC / rated value | А | 32 |
| Protection class IP | | IP20, with connected conductors |
| Product extension / can be installed / supplementary device | | Yes |
| power loss | | - |


| Operational voltage Um | | - |
|---|---|---------------------------------------|
| rated current In | | - |
| Rated make-break capacity Icn | | - |
| Rated service short-circuit breaking capacity Ics | | - |
| Rated ultimate short-circuit breaking capacity Icu | _ | - |
| Tripping characteristics Number | _ | - |
| Tripping characteristic/-class Conventional tripping current I2, (x In) | - | - |
| rated current In IEC, DIN/VDE | | - |
| Tripping characteristic/-class Test current I4, hold (x In) | | - |
| rated current In / IEC, DIN/VDE | | |
| • at 30 Cel | А | 32 |
| • at 40 Cel | А | 30.08 |
| • at 45 Cel | А | 28.896 |
| • at 50 Cel | А | 27.68 |
| • at 55 Cel | А | 26.496 |
| • at 60 Cel | А | 25.28 |
| Resistance against shock / according to IEC 60068-2-27 | | 150m/s ² at 11ms half-sine |


Certificates/approvals: **General Product Approval** IMQ ROSTEST CQC cqc **Shipping Approval** other other GL GL LRS B U R E A U VERITAS **Further information:** Information- and Downloadcenter (Catalogs, Brochures,...) http://www.siemens.com/lowvoltage/catalogs Industry Mall (Online ordering system) http://www.siemens.com/lowvoltage/mall Service&Support (Manuals, Certificates, Characteristics, FAQs,...) http://support.automation.siemens.com/WW/view/en/5SY6532-7/all Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SY6532-7

CAx-Online-Generator

http://www.siemens.com/cax

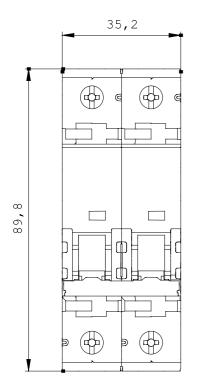

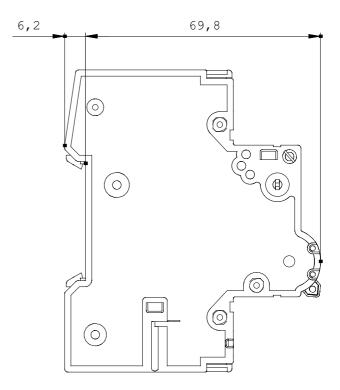

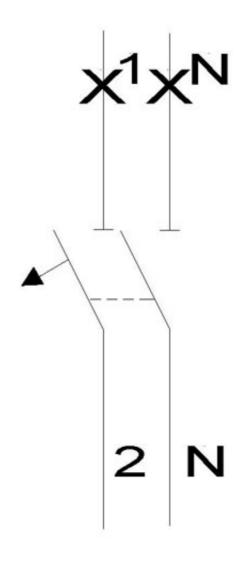

last change:

Nov 3, 2011