## SIEMENS

## **Product data sheet**

5SY8304-8



CIRCUIT BREAKER 400V 25KA, 3POLE, D,

4A, D=70MM

Similar to image

Technical data:		
Overvoltage class		3
type of voltage		AC/DC
Tripping characteristic class		D
Degree of pollution		3
Mounting depth	mm	70
Energy limiting class		3
Number of poles		3
Number of pitch units for width		3
Product function / n-switching		No
Supply voltage frequency / rated value	Hz	50
Switching capacity current / in accordance with IEC 60947-2 / rated value	kA	50
Supply voltage / for AC / rated value	V	400
Current / for AC / rated value	А	4
Protection class IP		IP20, with connected conductors
Product extension / can be installed / supplementary device		Yes
power loss		-
Operational voltage Um		-

	- - -
_	
_	-
	_
	-
	-
	-
А	4
А	3.76
А	3.612
А	3.46
А	3.312
А	3.16
	150m/s <sup>2</sup> at 11ms half-sine
	A A A

Certificates/approvals:				
General Product	Approval	Declaration of Conformity	other	
ROSTEST	(UL)	Manufacturer	other	

<b>Further</b>	· · · · · · · · · ·	
E I I I I I I I I I I I I		
I UILIGI		nation.

Information- and Downloadcenter (Catalogs, Brochures,...) http://www.siemens.com/lowvoltage/catalogs

UL

Industry Mall (Online ordering system) http://www.siemens.com/lowvoltage/mall


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


http://support.automation.siemens.com/WW/view/en/5SY8304-8/all

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...) http://www.automation.siemens.com/bilddb/cax\_en.aspx?mlfb=5SY8304-8

CAx-Online-Generator

http://www.siemens.com/cax

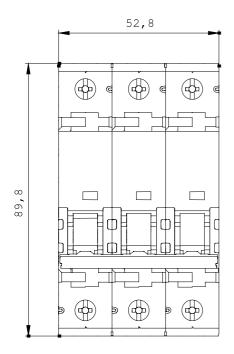

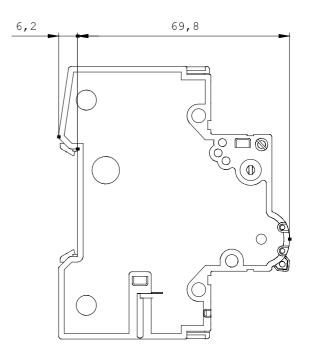

last change:

Nov 3, 2011