SIEMENS

Product data sheet

5SY8640-7



Similar to image

Technical data:		
Overvoltage class		3
type of voltage	-	AC/DC
Tripping characteristic class		C
Degree of pollution		3
Mounting depth	mm	70
Energy limiting class		3
Number of poles		4
Number of pitch units for width		4
Product function / n-switching	_	Yes
Supply voltage frequency / rated value	Hz	50
Switching capacity current / in accordance with IEC 60947-2 / rated value	kA	25
Supply voltage / for AC / rated value	V	400
Current / for AC / rated value	А	40
Protection class IP		IP20, with connected conductors
Product extension / can be installed / supplementary device		Yes
power loss		-
Operational voltage Um		-

CIRCUIT BREAKER 400V 25KA, 3+N-POLE, C, 40A, D=70M

_	-
	-
	-
	-
	-
	-
	-
	-
А	40
А	38.4
А	37.2
А	36
А	34.8
А	33.6
	150m/s² at 11ms half-sine
	A A A A

Certificates/approvals:				
General Product A	opproval	Declaration of Conformity	other	
ROSTEST	(UL)	Manufacturer	other	

Further	· · · · · · · · · ·	
E I I I I I I I I I I I I		
I UILIGI		nation.

Information- and Downloadcenter (Catalogs, Brochures,...) http://www.siemens.com/lowvoltage/catalogs

UL

Industry Mall (Online ordering system) http://www.siemens.com/lowvoltage/mall


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


http://support.automation.siemens.com/WW/view/en/5SY8640-7/all

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...) http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SY8640-7

CAx-Online-Generator

http://www.siemens.com/cax

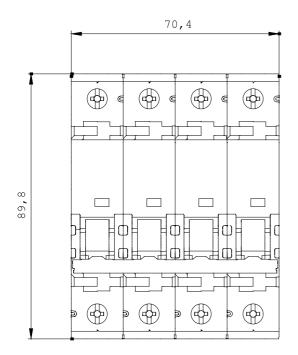

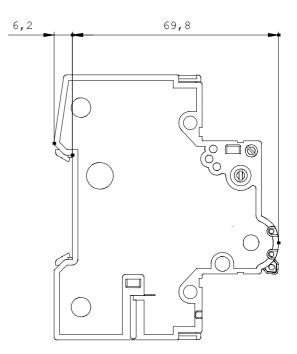

last change:

Nov 3, 2011