

PIN BUSBAR SHOCKPROOF, 10 SQMM 2-PHASE,  
214 MM LONG CAN BE CUT, WITH END CAPS



Similar to image

### Technical data:

|                                 |    |            |
|---------------------------------|----|------------|
| Busbar design                   |    | laminated  |
| Length                          | mm | 214        |
| Width                           | mm | 18         |
| Operating current / rated value | A  | 63         |
| Thickness / of busbar           | mm | 15         |
| Material / of the busbar        |    | SF-Cu F 24 |
| Product property / flexible     |    | Yes        |
| Traitement de surface / étamé   |    | No         |

### Certificates/approvals:

|                          |                           |       |
|--------------------------|---------------------------|-------|
| General Product Approval | Declaration of Conformity | other |
|--------------------------|---------------------------|-------|




[other](#)

### Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

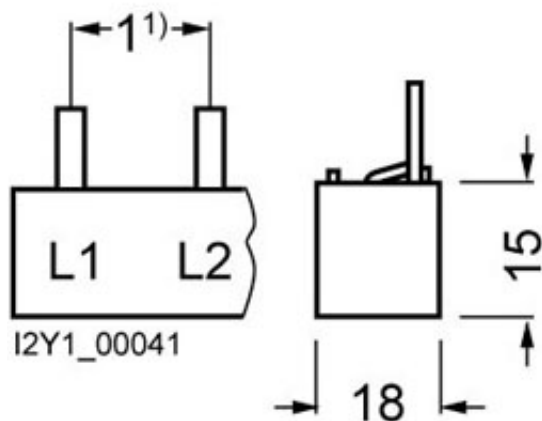

1) Pin spacings in MW (Modular widths, 1 MW = 18 mm).

last change:

Sep 23, 2013