SIEMENS

Product data sheet

5SY5232-7



CIRCUIT BREAKER CURR. SENS DC 440V AC 400V 10KA, 2-POLE, C, 32A

Similar to image

Technical data:						
Overvoltage class		3				
type of voltage		AC/DC				
Tripping characteristic class		C				
Degree of pollution		3				
Mounting depth	mm	70				
Energy limiting class		3				
Number of poles		2				
Number of pitch units for width		2				
Product function / n-switching		No				
Supply voltage frequency / rated value	Hz	50				
Breaking capacity current / acc. to EN 60898 / rated value	kA	10				
Supply voltage / for AC / rated value	V	400				
Current / for AC / rated value	А	32				
Protection class IP		IP20, with connected conductors				
Product extension / can be installed / supplementary device		Yes				
power loss		-				
Operational voltage Um		-				
rated current In		-				

Rated make-break capacity Icn	-	
Rated service short-circuit breaking capacity Ics	-	
Rated ultimate short-circuit breaking capacity Icu	-	
Tripping characteristics Number	-	
Tripping characteristic/-class Conventional tripping current I2, (x In)	-	
rated current In IEC, DIN/VDE	-	
Tripping characteristic/-class Test current I4, hold (x In)	-	
Resistance against shock / according to IEC 60068-2-27	15	50m/s ² at 11ms half-sine

Certificates/approvals:							
General Produc	t Approval		Declaration of Conformity	other			
COC	<u>ROSTEST</u>		Manufacturer	other			

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...) http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)


http://www.siemens.com/lowvoltage/mall


Service&Support (Manuals, Certificates, Characteristics, FAQs,...) http://support.automation.siemens.com/WW/view/en/5SY5232-7/all


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...) http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SY5232-7

CAx-Online-Generator

http://www.siemens.com/cax

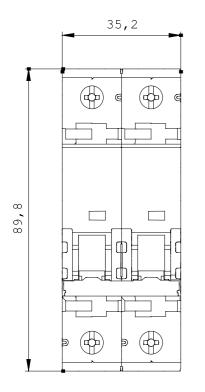

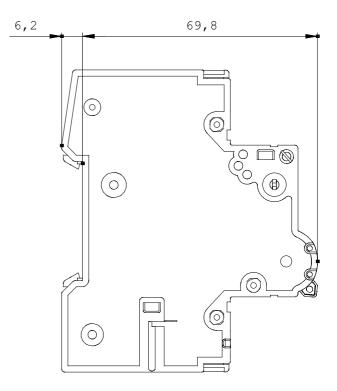

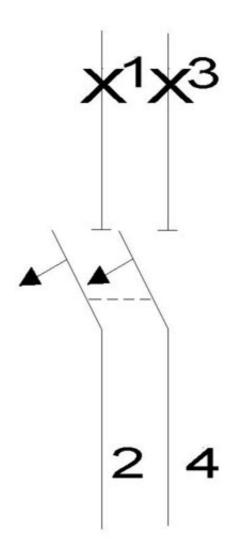

last change:

Nov 3, 2011