SIEMENS

Product data sheet

5SY4450-5



Similar to image

Technical data:			
Overvoltage class		3	
type of voltage		AC/DC	
Tripping characteristic class		A	
Degree of pollution		3	
Mounting depth	mm	70	
Energy limiting class		3	
Number of poles		4	
Number of pitch units for width		4	
Product function / n-switching		No	
Supply voltage frequency / rated value	Hz	50	
Switching capacity current / in accordance with IEC 60947-2 / rated value	kA	15	
Breaking capacity current / acc. to EN 60898 / rated value	kA	10	
Supply voltage / for AC / rated value	V	400	
Current / for AC / rated value	А	50	
Protection class IP		IP20, with connected conductors	
Product extension / can be installed / supplementary device		Yes	
power loss		-	

CIRCUIT BREAKER 400V 10KA, 4-POLE, A, 50A, D=70MM

Operational voltage Um		-
rated current In		-
Rated make-break capacity Icn		-
Rated service short-circuit breaking capacity Ics		-
Rated ultimate short-circuit breaking capacity Icu		-
Tripping characteristics Number		-
Tripping characteristic/-class Conventional tripping current I2, (x In)		-
rated current In IEC, DIN/VDE		-
Tripping characteristic/-class Test current I4, hold (x In)		-
rated current In / IEC, DIN/VDE		
• at 30 Cel	А	50
• at 40 Cel	А	48
• at 45 Cel	А	47
• at 50 Cel	А	46
• at 55 Cel	А	44.5
• at 60 Cel	А	43.5
Resistance against shock / according to IEC 60068-2-27		150m/s ² at 11ms half-sine

Certificates/approvals:

General Product Approval other





other



Information- and Downloadcenter (Catalogs, Brochures,...) http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)


http://www.siemens.com/lowvoltage/mall


Service&Support (Manuals, Certificates, Characteristics, FAQs,...) http://support.automation.siemens.com/WW/view/en/5SY4450-5/all

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...) http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SY4450-5

CAx-Online-Generator

http://www.siemens.com/cax

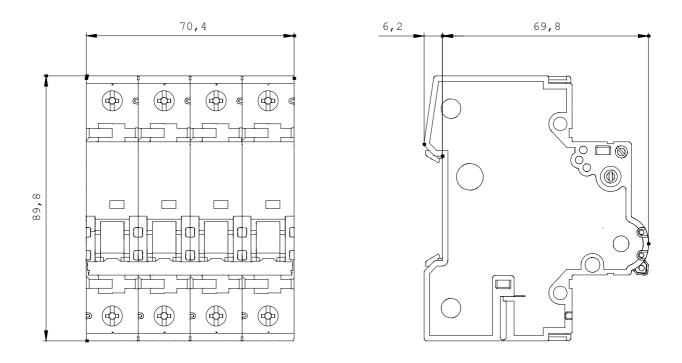

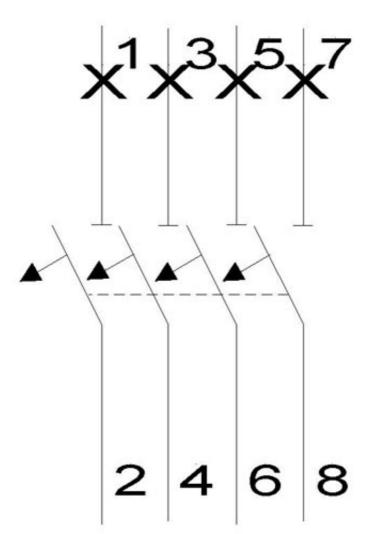

last change: