


PIN BUSBAR,
16 SQMM CONNECTION: 3 PHASE/ + 8X PHASE SAFE-
TO-TOUCH FOR 1F,
4-POLE + 8LS, 1-POLE

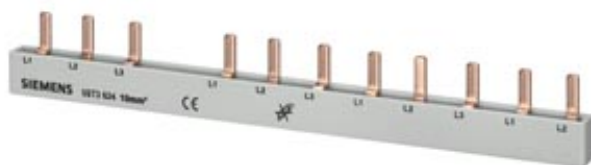

Similar to image

Technical data:

Busbar design		laminated
Length	mm	210
Width	mm	10.3
Operating current / rated value	A	80
Thickness / of busbar	mm	19
Material / of the busbar		SF-Cu F 24
Product property / flexible		No
Traitement de surface / étamé		No

Certificates/approvals:

General Product Approval	other
--------------------------	-------




[other](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

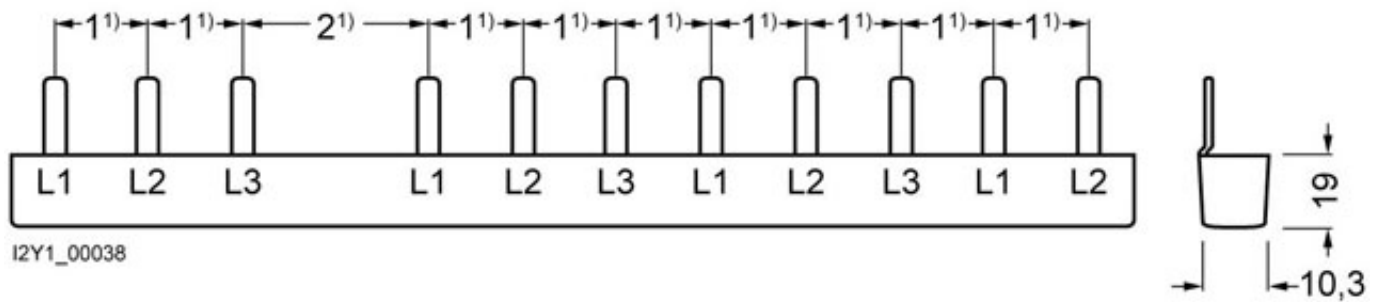

¹⁾ Pin spacings in MW (Modular widths, 1 MW = 18 mm).

last change:

Sep 23, 2013