

BUSBAR W. PUNCHINGS,
MODULAR SIZE 27MM FOR NEOZED FUSE BASE D02
COPPER BARE,
36SQMM, 1000MM



Similar to image

Technical data:

Busbar design		flat
Length	mm	1,000
Width	mm	3
Operating current / rated value	A	168
Thickness / of busbar	mm	12
Material / of the busbar		SF-Cu F 24
Product property / flexible		Yes
Traitement de surface / étamé		No

Certificates/approvals:

General Product Approval	Declaration of Conformity
--------------------------	---------------------------



Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<http://support.automation.siemens.com/WW/view/en/5SH5322/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SH5322

CAX-Online-Generator

<http://www.siemens.com/cax>

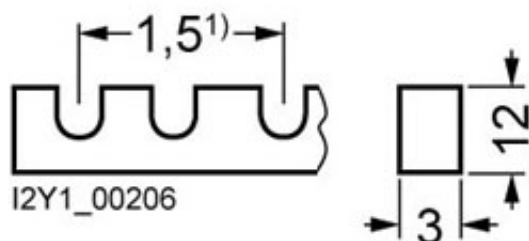

¹) Fork spacings in MW (Modular widths, 1 MW = 18 mm).

last change:

Mar 24, 2014