






LV HRC FUSE LINK GL/GG WITH NON-INSULATED GRIP LUGS WITH COMBINATION INDICATOR SIZE 2, 250A, AC 500V/DC 440V

Similar to image

| Technical data: | | |
|--|----|--------------------|
| Current / for AC / rated value | A | 250 |
| Operating class of the fuse link | | gG |
| Size of the fallback-system / acc. to DIN EN 60269-1 | | NH2 |
| Supply voltage | | |
| • for AC / rated value | V | 500 |
| • for DC | V | 440 |
| Switching capacity current | | |
| • in accordance with IEC 60947-2 / rated value | kA | 120 |
| • with DC / in accordance with IEC 60947-2 / rated value | kA | 25 |
| Design of an identification indicator | | Combination alarms |

| Certificates/approvals: | | | |
|--|---|------------------------------|---|
| General Product Approval | Declaration of Conformity | Test Certificates | Shipping Approval |
|  CSA |  KEMA | ROSTEST | Manufacturer |
| | | Manufacturer |  GL |

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<http://support.automation.siemens.com/WW/view/en/3NA7244/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NA7244

CAX-Online-Generator

<http://www.siemens.com/cax>

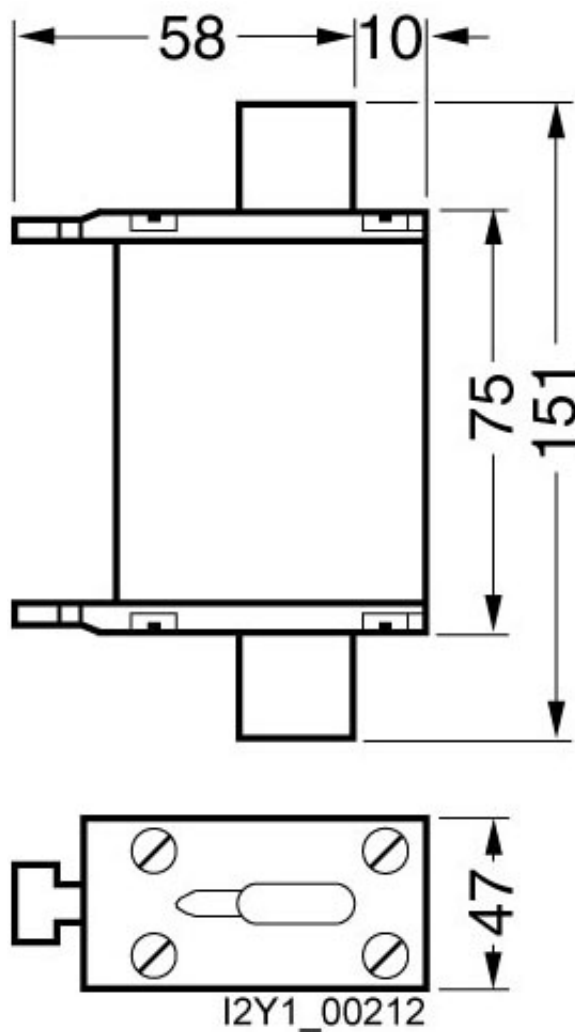

last change:

Aug 26, 2011