





LV HRC FUSE LINK GL/GG WITH NON-INSULATED GRIP LUGS WITH COMBINATION INDICATOR SIZE 00, 160A, AC 500V/DC 250V

Similar to image

### Technical data:

<b>Current / for AC / rated value</b>	A	160
<b>Operating class of the fuse link</b>		gG
<b>Size of the fallback-system / acc. to DIN EN 60269-1</b>		NH00
<b>Supply voltage</b>		
• for AC / rated value	V	500
• for DC	V	250
<b>Switching capacity current</b>		
• in accordance with IEC 60947-2 / rated value	kA	120
• with DC / in accordance with IEC 60947-2 / rated value	kA	25
<b>Design of an identification indicator</b>		Combination alarms

### Certificates/approvals:

General Product Approval	Declaration of Conformity	Test Certificates	Shipping Approval
<a href="#">ROSTEST</a>  VDE	<a href="#">Manufacturer</a>	<a href="#">Manufacturer</a>	 GL

### Further information:

---

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

---

Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

---

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3NA7836/all>

---


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3NA7836](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NA7836)

---

CAX-Online-Generator

<http://www.siemens.com/cax>

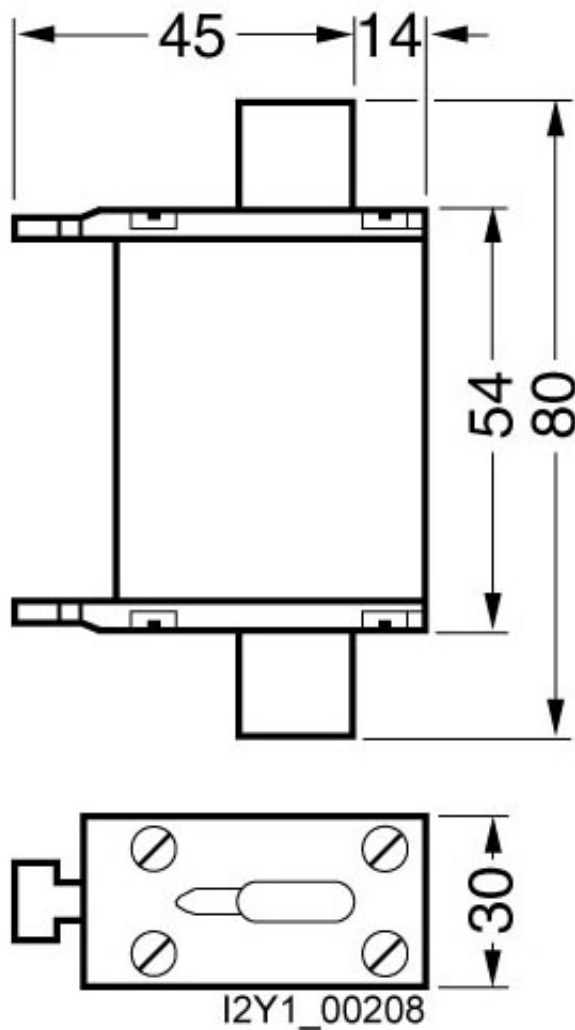

last change:

Aug 26, 2011