SIEMENS

Product data sheet 3NA3240-6



LV HRC FUSE LINK GL/GG WITH NON-INSULATED GRIP LUGS WITH FRONT INDICATOR SIZE 2, 200A, AC 690V/DC 440V

Similar to image

Technical data:				
Current / for AC / rated value	A	200		
Operating class of the fuse link		gG		
Size of the fallback-system / acc. to DIN EN 60269-1		NH2		
Supply voltage				
• for AC / rated value	V	690		
• for DC	V	440		
Switching capacity current				
• in accordance with IEC 60947-2 / rated value	kA	120		
• with DC / in accordance with IEC 60947-2 / rated value	kA	25		
Design of an identification indicator		Front indicators		
Ambient temperature				
• minimum	°C	-5		
• maximum	°C	40		

Certificates/approvals:

General Product Approval	Declaration of Conformity	Test Certificates	other
ROSTEST	Manufacturer	Manufacturer	Manufacturer

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)

http://www.siemens.com/lowvoltage/mall

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


http://support.automation.siemens.com/WW/view/en/3NA3240-6/all


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NA3240-6

CAx-Online-Generator

http://www.siemens.com/cax

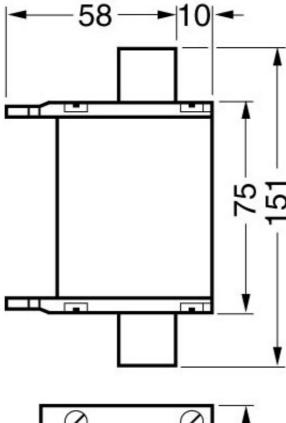



last change: Aug 26, 2011