SIEMENS

Product data sheet 3NA3244-6



LV HRC FUSE LINK GL/GG WITH NON-INSULATED GRIP LUGS WITH FRONT INDICATOR SIZE 2, 250A, AC 690V/DC 440V

Similar to image

| Technical data: | | | | |
|--|----|------------------|--|--|
| Current / for AC / rated value | Α | 250 | | |
| Operating class of the fuse link | | gG | | |
| Size of the fallback-system / acc. to DIN EN 60269-1 | | NH2 | | |
| Supply voltage | | | | |
| • for AC / rated value | V | 690 | | |
| • for DC | V | 440 | | |
| Switching capacity current | | | | |
| • in accordance with IEC 60947-2 / rated value | kA | 120 | | |
| • with DC / in accordance with IEC 60947-2 / rated value | kA | 25 | | |
| Design of an identification indicator | | Front indicators | | |
| Ambient temperature | | | | |
| • minimum | °C | -5 | | |
| • maximum | °C | 40 | | |

Certificates/approvals:

| General Product Approval | Declaration of Conformity | Test Certificates | other |
|--------------------------|---------------------------|-------------------|--------------|
| ROSTEST | Manufacturer | Manufacturer | Manufacturer |

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)

http://www.siemens.com/lowvoltage/mall

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


http://support.automation.siemens.com/WW/view/en/3NA3244-6/all

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NA3244-6

CAx-Online-Generator

http://www.siemens.com/cax

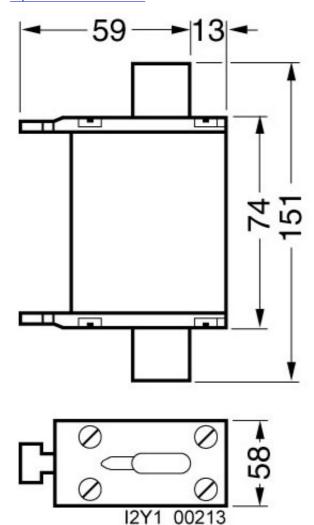

last change: Aug 26, 2011