



LV HRC FUSE LINK GL/GG WITH NON-INSULATED GRIP LUGS WITH COMBINATION INDICATOR SIZE 000, 10A, AC 690V/DC 250V

Similar to image

### Technical data:

|  |    |                    |
|--|----|--------------------|
| Current / for AC / rated value                           | A  | 10                 |
| Operating class of the fuse link                         |    | gG                 |
| Size of the fallback-system / acc. to DIN EN 60269-1     |    | NH000              |
| Supply voltage   |    |                    |
| • for AC / rated value                                   | V  | 690                |
| • for DC   | V  | 250                |
| Switching capacity current                               |    |                    |
| • in accordance with IEC 60947-2 / rated value           | kA | 120                |
| • with DC / in accordance with IEC 60947-2 / rated value | kA | 25                 |
| Design of an identification indicator                    |    | Combination alarms |

### Certificates/approvals:

| General Product Approval | Declaration of Conformity    | Test Certificates            |
|--------------------------|------------------------------|------------------------------|
| <a href="#">ROSTEST</a>  | <a href="#">Manufacturer</a> | <a href="#">Manufacturer</a> |

### Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

---

Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

---

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3NA7803-6/all>

---


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3NA7803-6](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NA7803-6)

---

CAX-Online-Generator

<http://www.siemens.com/cax>

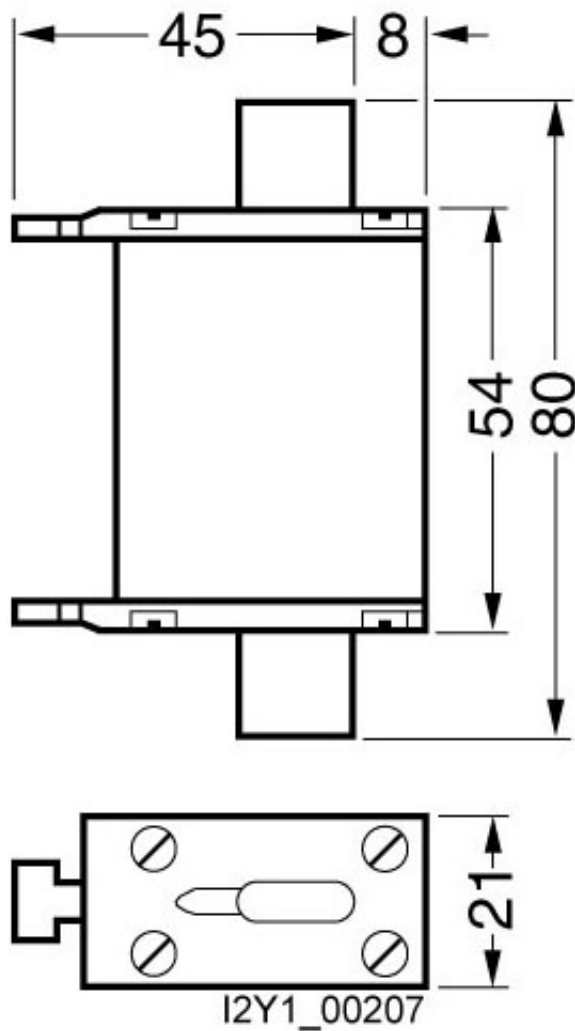

last change:

Aug 26, 2011