

DIAZED FUSE-LINK 690V FOR CABLE AND LINE
PROTECTION UTILIZATION CATEGORY GG SIZE DIII,
E33, 35A



Similar to image

Technical data:

Color coding of the fuse link		black
Current / for AC / rated value	A	35
Tripping characteristic class		others
Operating class of the fuse link		gG
Size of the fallback-system / acc. to DIN EN 60269-1		DIII
Supply voltage		
• for AC / rated value	V	690
• for DC	V	600
Switching capacity current		
• in accordance with IEC 60947-2 / rated value	kA	50
• with DC / in accordance with IEC 60947-2 / rated value	kA	8
Design of the fuse link		DIAZED fuse links
Design of the product		For cable and line protection
mounting position		Any, preferably vertical
Protection class IP		IP20, with connected conductors
Climatic class		Up to 45°C at 95 % rel. humidity
Ambient temperature		
• minimum	°C	-5

• maximum	°C	40
• during storage / note		Air humidity 90% at 20 °C
Product description		Using screw adapter or adapter sleeves
Net weight	g	73
Reference code / according to DIN EN 61346-2		F
Item designation / according to DIN EN 81346-2		F

Certificates/approvals:

General Product Approval	Declaration of Conformity	Test Certificates	other
--------------------------	---------------------------	-------------------	-------



GOST



EG-Konf.

[Type Test
Certificates/Test
Report](#)

[Environmental
Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.de/lowvoltage/mall>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/5SD8035/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SD8035

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

[Datanorm](#) [GAEB81](#) [GAEB83](#) [RTF](#) [TXT](#)

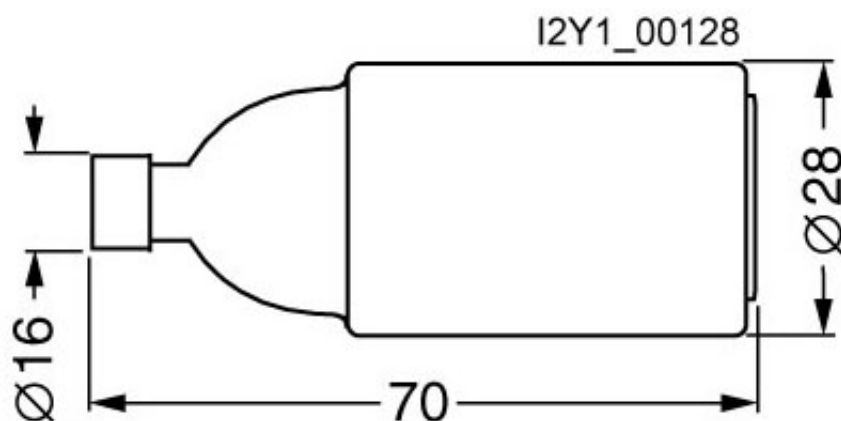

last change:

Jun 30, 2014