



LV HRC FUSE LINK GL/GG WITH NON-INSULATED GRIP LUGS WITH FRONT INDICATOR SIZE 4A, 1250A, AC 500V/DC 440V

Similar to image

| Technical data:                                          |    |                  |
|----------------------------------------------------------|----|------------------|
| Current / for AC / rated value                           | A  | 1,250            |
| Operating class of the fuse link                         |    | gG               |
| Size of the fallback-system / acc. to DIN EN 60269-1     |    | NH4a             |
| Supply voltage                                           |    |                  |
| • for AC / rated value                                   | V  | 500              |
| • for DC                                                 | V  | 400              |
| Switching capacity current                               |    |                  |
| • in accordance with IEC 60947-2 / rated value           | kA | 120              |
| • with DC / in accordance with IEC 60947-2 / rated value | kA | 25               |
| Design of an identification indicator                    |    | Front indicators |
| Ambient temperature                                      |    |                  |
| • minimum                                                | °C | -5               |
| • maximum                                                | °C | 40               |

Certificates/approvals:

| General Product Approval                                                                 | Declaration of Conformity    | Test Certificates                                                                        | other                        |
|------------------------------------------------------------------------------------------|------------------------------|------------------------------------------------------------------------------------------|------------------------------|
| <br>CQC | <a href="#">ROSTEST</a>      | <br>VDE | <a href="#">Manufacturer</a> |
|                                                                                          | <a href="#">Manufacturer</a> | <a href="#">Manufacturer</a>                                                             | <a href="#">Manufacturer</a> |

#### Further information:

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

##### Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<http://support.automation.siemens.com/WW/view/en/3NA3682/all>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3NA3682](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NA3682)

##### CAX-Online-Generator

<http://www.siemens.com/cax>

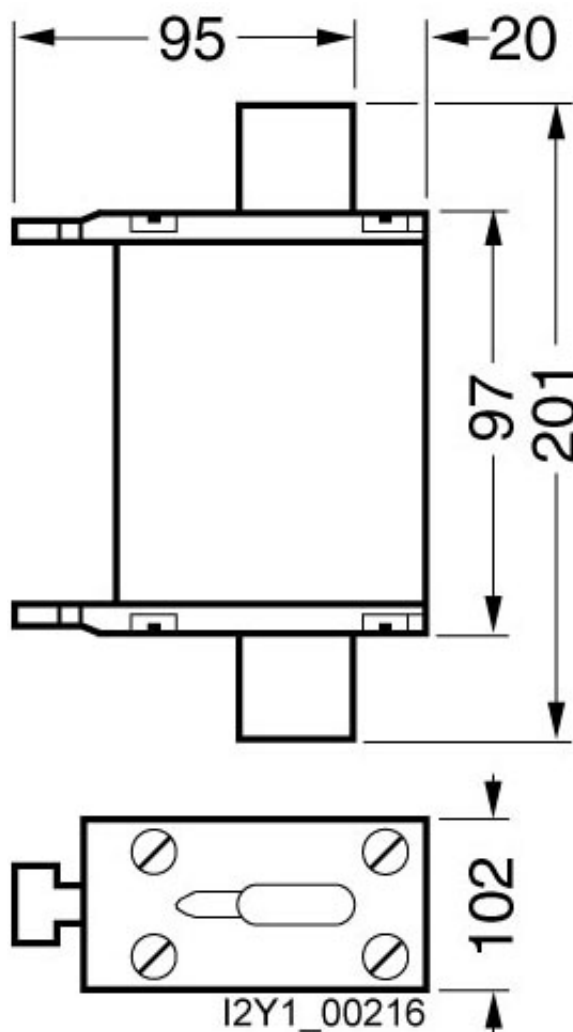

last change:

Aug 26, 2011