


FEED-THROUGH TERMINAL WITH QUICK CONNECTION,
SECTION: 0.25 - 1.5 MM2, WIDTH: 5.2 MM,
COLOR: GRAY

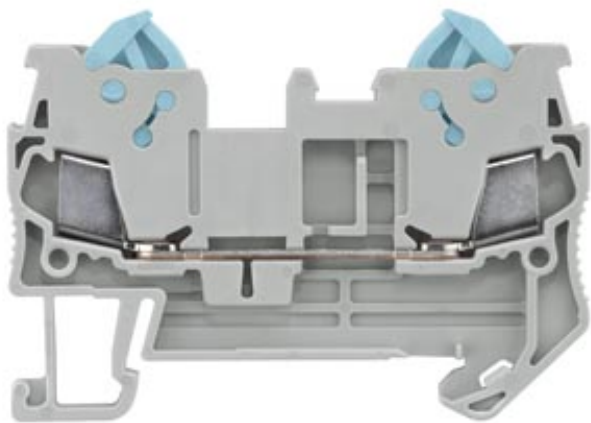

Similar to image

Technical data:		
Mounting type		DIN rail 35 mm
Length	mm	58.5
Height	mm	39.3
Terminal contact spacing	mm	5.2
Combustibility class acc. to UL 94		V0
Color		grey
Insulation material		others
Position / of terminal		top
Operating voltage / rated value	V	800
Operating current / rated value	A	17.5
Product component / required / connection plate		No
Design of terminal / terminal levels linked internally		No
Design tested acc. to type of protection / EEx e		No
Number of terminal levels		1
Number of terminal points / per terminal level		2
Section de conducteur raccordable		
• solid		
• minimum	mm²	1.5

• maximum	mm ²	1.5
• multibrin		
• minimum	mm ²	1.5
• maximum	mm ²	1.5
• finely stranded / without wire end processing		
• minimum	mm ²	1.5
• maximum	mm ²	1.5
Ambient temperature / during operating		
• minimum	°C	-25
• maximum	°C	55
Conductor cross-section that can be connected / finely stranded / with wire end processing		
• minimum	mm ²	1.5
• maximum	mm ²	1.5
Design of the electrical connection		
• 1		insulation piercing connection
• 2		insulation piercing connection

Certificates/approvals:

General Product Approval



Declaration of Conformity

Shipping Approval

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/8WH3000-0AE00/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8WH3000-0AE00

CAX-Online-Generator

<http://www.siemens.com/cax>

last change:

Mar 17, 2014