



MINIZED-SWITCH DISCONNECTOR FOR NEOZED FUSE  
LINKS D02,  
3-POLE+N DRAW-OUT ASSEMBLY

Similar to image

### Technical data:

|                                                      |    |     |
|------------------------------------------------------|----|-----|
| Number of poles                                      |    | 3   |
| Size of the fallback-system / acc. to DIN EN 60269-1 |    | D02 |
| Operating voltage / for AC / rated value             | V  | 400 |
| Current / for AC / rated value                       | A  | 63  |
| Rated impulse withstand voltage Uimp                 | kV | 6   |

### Certificates/approvals:

General Product Approval

Declaration of  
Conformity

Shipping Approval



### Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)



<http://www.siemens.com/lowvoltage/mall>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/5SG7163/all>

**Tender specifications**

[Datanorm GAEB81](#) [GAEB83](#) [RTF](#) [TXT](#)

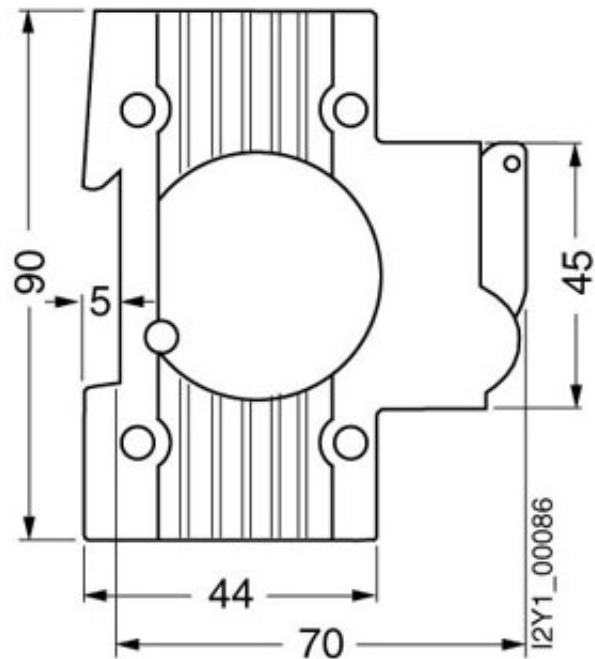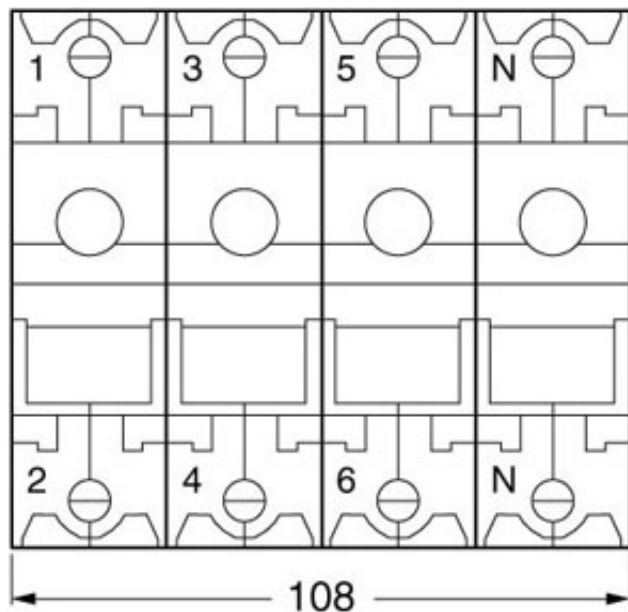

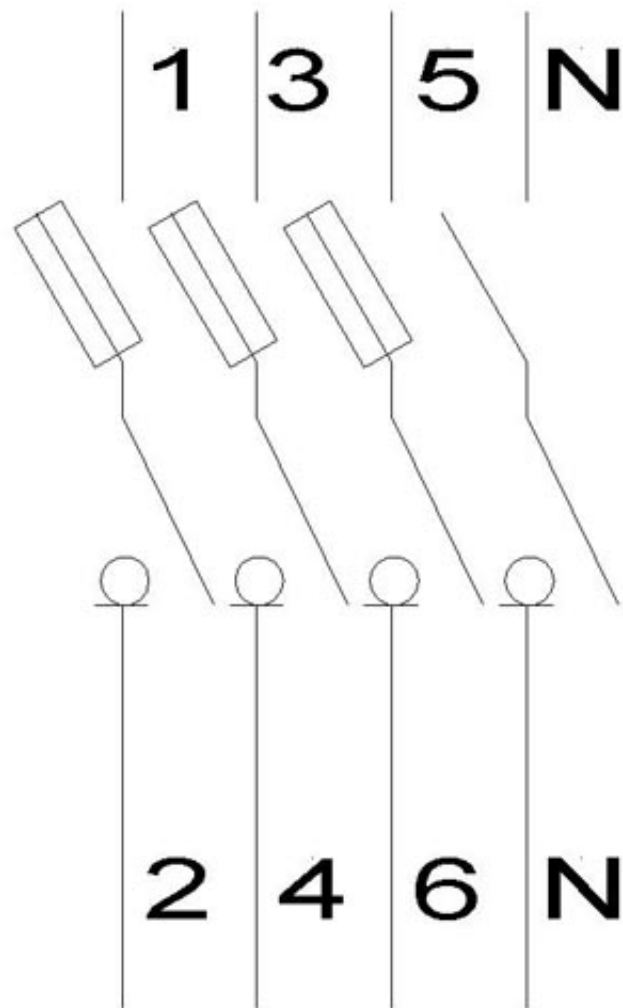

last change:

Aug 25, 2011