


ABS ENCLOSED SAFETY SWITCHES / ISOLATORS 10-80 A




- IP 65
- Padlockable 
- Door interlock with defeat mechanism
- Excellent insulating properties
- Good resistance against many chemicals
- E/G=Grey, Y/R=Yellow/Red

U2

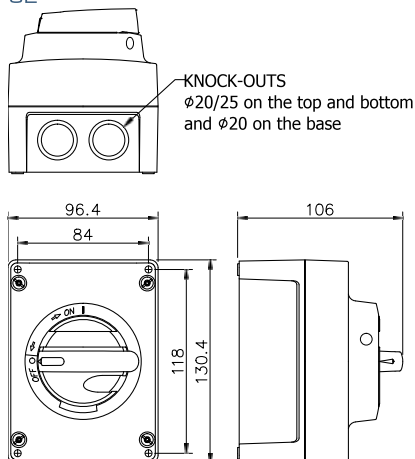

U3

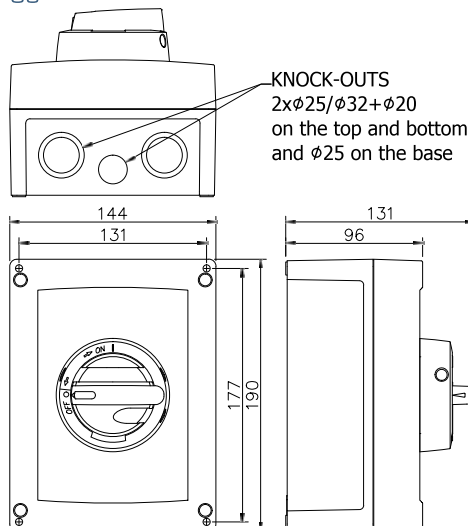

Type		AC-21	400 V 415 V 690 V	AC-22	400 V 415 V 690 V	AC-23	400 V 415 V	AC-23	690 V	EAN-Code 6419410...		Enclosure	Weight kg
Grey/black	Yellow/red	I _e / A		I _e / A		I _e / A	P / kW	I _e / A	P / kW	Grey/black	Yellow/red		
3-pole													
KEM 310U E/G	KEM 310U Y/R ABS	20 A		10 A		10 A	5.5 kW	10 A	7.5 kW	...481004	...481165	U2	0.4
KEM 316U E/G	KEM 316U Y/R ABS	25 A		16 A		16 A	7.5 kW	16 A	11 kW	...481028	...481189	U2	0.4
KEM 325U E/G	KEM 325U Y/R ABS	40 A		25 A		25 A	11 kW	25 A	22 kW	...481042	...481202	U2	0.4
KEM 340U E/G	KEM 340U Y/R ABS	63 A		40 A		40 A	22 kW	32 A	30 kW	...481066	...481226	U2	0.4
KEM 363U E/G	KEM 363U Y/R ABS	80 A		63 A		40 A	22 kW	40 A	37 kW	...481325	...481646	U3	0.6
KEM 380U E/G	KEM 380U Y/R ABS	100 A		80 A		63 A	30 kW	40 A	37 kW	...481363	...481684	U3	0.6
4-pole													
KEM 410U E/G	KEM 410U Y/R ABS	20 A		10 A		10 A	5.5 kW	10 A	7.5 kW	...481011	...481172	U2	0.5
KEM 416U E/G	KEM 416U Y/R ABS	25 A		16 A		16 A	7.5 kW	16 A	11 kW	...481035	...481196	U2	0.5
KEM 425U E/G	KEM 425U Y/R ABS	40 A		25 A		25 A	11 kW	25 A	22 kW	...481059	...481219	U2	0.5
KEM 440U E/G	KEM 440U Y/R ABS	63 A		40 A		40 A	22 kW	32 A	30 kW	...481073	...481233	U2	0.5
KEM 463U E/G	KEM 463U Y/R ABS	80 A		63 A		40 A	22 kW	40 A	37 kW	...481332	...481653	U3	0.7
KEM 480U E/G	KEM 480U Y/R ABS	100 A		80 A		63 A	30 kW	40 A	37 kW	...481370	...481691	U3	0.7