

# AJGMPMPCF

---

Ultra Low Loss ULL TeraSPEED® MPO(female) to MPO(female) Pre-terminated Trunk Cable, MPO12, 24-Fiber, LSZH, 12 fiber PmP 2.0 mm Dca, Method A

## Product Classification

<b>Regional Availability</b>	Asia   Australia/New Zealand   EMEA   Latin America   North America
<b>Portfolio</b>	CommScope®
<b>Product Type</b>	Fiber trunk cable assembly
<b>Product Brand</b>	TeraSPEED®
<b>Ordering Note</b>	For additional jacket colors, please contact a CommScope Sales Representative   For lengths greater than 999 ft (304 m), orders must be in meters   Minimum length may vary based on cable configuration

## General Specifications

<b>Color, boot A</b>	Black
<b>Color, boot B</b>	Black
<b>Color, connector A</b>	Green
<b>Color, connector B</b>	Green
<b>Construction Type</b>	Ultra Low Loss (ULL) trunk/extension/cross-connect, indoor
<b>Fibers per Subunit, quantity</b>	12
<b>Furcation Color</b>	Yellow
<b>Interface, Connector A</b>	MPO-12/APC Female
<b>Interface, Connector B</b>	MPO-12/APC Female
<b>Jacket Color</b>	Yellow
<b>Total Fibers, quantity</b>	24

## Dimensions

<b>Breakout Length</b>	33 in
------------------------	-------

## Optical Specifications

<b>Fiber Type</b>	G.657.A2
-------------------	----------

## Environmental Specifications

<b>Operating Temperature</b>	-10 °C to +60 °C (+14 °F to +140 °F)
<b>EN50575 CPR Cable EuroClass</b>	Dca

# AJGMPMPCF

**Environmental Space**                      Low Smoke Zero Halogen (LSZH)


## Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Above maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on <a href="http://www.commscope.com/ProductCompliance">www.commscope.com/ProductCompliance</a>
ROHS	Compliant/Exempted



## Included Products

**7 6 0 2 4 2 3 0 8**  
**N-024-MP-8G-F12YL/20T/D** — Low Smoke Zero Halogen Riser MPO Trunk Cable, 24 fiber with 12 fiber 2.0mm subunits

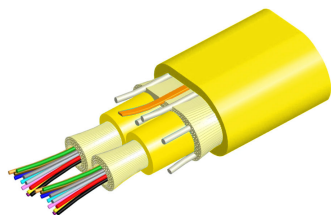

Low Smoke Zero Halogen Riser MPO Trunk Cable, 24 fiber with 12 fiber 2.0mm subunits

## Product Classification

<b>Regional Availability</b>	Asia   Australia/New Zealand   EMEA   Latin America   North America
<b>Portfolio</b>	CommScope®
<b>Product Type</b>	Fiber indoor cable


## General Specifications

<b>Cable Type</b>	MPO trunk cable
<b>Construction Type</b>	Non-armored
<b>Fiber Type, quantity</b>	24
<b>Fibers per Subunit, quantity</b>	12
<b>Jacket Color</b>	Yellow
<b>Subunit Type</b>	Gel-free
<b>Subunit, quantity</b>	2
<b>Total Fiber Count</b>	24

## Dimensions

<b>Height Over Jacket</b>	4.5 mm   0.177 in
<b>Width Over Jacket</b>	6.2 mm   0.244 in
<b>Buffer Tube/Subunit Diameter</b>	2 mm   0.079 in

## Representative Image

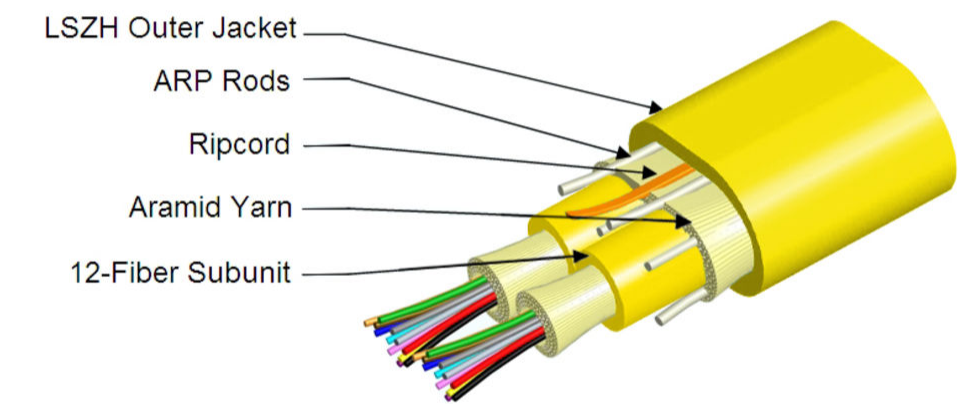

Mechanical Specifications

Minimum Bend Radius, loaded	67 mm   2.638 in
Minimum Bend Radius, unloaded	45 mm   1.772 in
Tensile Load, long term, maximum	200 N   44.962 lbf
Tensile Load, short term, maximum	667 N   149.948 lbf
Compression	10 N/mm   1.751 lb/in
Compression Test Method	FOTP-41   IEC 60794-1 E3
Flex	300 cycles
Flex Test Method	FOTP-104   IEC 60794-1 E6
Impact	5.88 N-m   52.042 in lb
Impact Test Method	FOTP-25   IEC 60794-1 E4
Strain	See long and short term tensile loads

# 760242308 | N-024-MP-8G-F12YL/20T/D

---

<b>Strain Test Method</b>	FOTP-33   IEC 60794-1 E1
<b>Twist</b>	10 cycles
<b>Twist Test Method</b>	FOTP-85   IEC 60794-1 E7
<b>Vertical Rise, maximum</b>	500 m   1,640.42 ft

## Optical Specifications

<b>Fiber Type</b>	G.657.A2/B2   G.657.A2/B2
-------------------	---------------------------

## Environmental Specifications

<b>Installation temperature</b>	0 °C to +60 °C (+32 °F to +140 °F)
<b>Operating Temperature</b>	0 °C to +70 °C (+32 °F to +158 °F)
<b>Storage Temperature</b>	-40 °C to +70 °C (-40 °F to +158 °F)
<b>Cable Qualification Standards</b>	ANSI/CEA S-83-596   Telcordia GR-409
<b>EN50575 CPR Cable EuroClass</b>	Dca   a1   d1   s1a
<b>Environmental Space</b>	Low Smoke Zero Halogen (LSZH)   Riser
<b>Flame Test Listing</b>	NEC OFNR-LS (ETL) and c(ETL)
<b>Flame Test Method</b>	IEC 60332-3   IEC 60754-2   IEC 61034-2   IEEE 383   UL 1666   UL 1685

## Environmental Test Specifications

<b>Heat Age</b>	0 °C to +85 °C (+32 °F to +185 °F)
<b>Heat Age Test Method</b>	IEC 60794-1 F9
<b>Low High Bend</b>	0 °C to +60 °C (+32 °F to +140 °F)
<b>Low High Bend Test Method</b>	FOTP-37   IEC 60794-1 E11
<b>Temperature Cycle</b>	0 °C to +70 °C (+32 °F to +158 °F)
<b>Temperature Cycle Test Method</b>	FOTP-3   IEC 60794-1 F1

## Packaging and Weights

<b>Cable weight</b>	33 kg/km   238.689 lb/kft
---------------------	---------------------------

## Regulatory Compliance/Certifications

<b>Agency</b>	<b>Classification</b>
CENELEC	EN 50575 compliant, Declaration of Performance (DoP) available
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system



## \* Footnotes

**Operating Temperature** Specification applicable to non-terminated bulk fiber cable