


Transcab cable ducting



6361 25

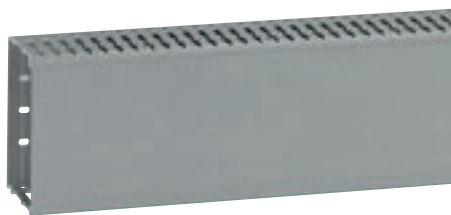

6361 17



6362 08



6362 02

6.5 mm wide fingers with a 6 mm spacing
 Accepts up to 6 mm² without breaking side wall finger
 Two pre-scored lines allow removal of fingers 2 m length
 Bump on side wall fingers help cabling
 Rounded fingers prevent injury during cabling
 Conform to EN 500 85 parts 2 and 3
 Approvals:
 CSA (Canada) No 700 861
 UL (USA) No 196 692
 RAL 7030 Grey PVC / RAL 7035 PC ABS halogen free
 Plastic cable ducting (base + cover)

Pack⁽¹⁾ Cat.Nos Plastic cable ducting (base + cover) Grey RAL 7030

Pack ⁽¹⁾	Cat.Nos	Width x Height (mm)	Capacity (mm ²)
32	6360 95	15 x 25	264
60	6361 00	25 x 25	391
56	6361 05	40 x 25	692
40	6360 96	15 x 40	455
56	6361 01	25 x 40	720
48	6361 06	40 x 40	1245
32	6361 11	60 x 40	1932
24	6361 15	80 x 40	2647
24	6361 19	100 x 40	3363
56	6361 02	25 x 60	1159
48	6361 07	40 x 60	2007
32	6361 12	60 x 60	3115
24	6361 16	80 x 60	4200
24	6361 20	100 x 60	5307
16	6361 24	120 x 60	6403
40	6361 03	25 x 80	1600
40	6361 08	40 x 80	2717
32	6361 13	60 x 80	4216
24	6361 17	80 x 80	5715
16	6361 21	100 x 80	7215
16	6361 25	120 x 80	8729
24	6361 09	40 x 100	3354
24	6361 14	60 x 100	5216
20	6361 18	80 x 100	7078
16	6361 22	100 x 100	8960
12	6361 23	150 x 100	13683

Pack Cat.Nos Plastic cable ducting (base + cover) Grey RAL 7035 halogen free

Pack	Cat.Nos	Width x Height (mm)	Capacity (mm ²)
60	6362 00	25 x 25	391
56	6362 01	25 x 40	720
48	6362 06	40 x 40	1245
56	6362 02	25 x 60	1159
48	6362 07	40 x 60	2007
32	6362 12	60 x 60	3115
40	6362 08	40 x 80	2717
32	6362 13	60 x 80	4216
24	6362 17	80 x 80	5715
16	6362 25	120 x 80	8729



Accessories

see p. 360

(1) Number of meters contained in each pack