



SITOP PURE LEAD BATTERY MODULE 24 V/2.5 AH WITH SERVICE-FREE SEALED LEAD-ACID BATTERIES FOR SITOP DC UPS MODULE 6 A AND 15 A

Technical specifications

Charging current/charging voltage

End of charging voltage / for DC

• at -10 °C / recommended	29 V
• at 0 °C / recommended	28.6 V
• at 10 °C / recommended	28.3 V
• at 20 °C / recommended	27.9 V
• at 30 °C / recommended	27.5 V
• at 40 °C / recommended	27.2 V
• at 50 °C / recommended	26.8 V
• at 60 °C / recommended	26.4 V

charging current / maximum

5 A

Safety

Safety


CE mark	Yes
Protection class IP	IP00

Operating data

Ambient temperature

• in operation	-40 °C ... 60 °C
• on transport	-40 °C ... 60 °C
• in storage	-40 °C ... 60 °C

Relative, temporary capacity loss / at 20 °C / in a month / typical	3 %
Service life	
[nicht versorgt: PMD_ABU065_001_000]	
•	10 a
•	7 a
•	3 a
•	1.5 a
•	1 a
Mechanics	
Width / of the housing	265 mm
Height / of the housing	151 mm
Depth / of the housing	91 mm
Installation width	285 mm
Mounting height	171 mm
Net weight	3.8 kg

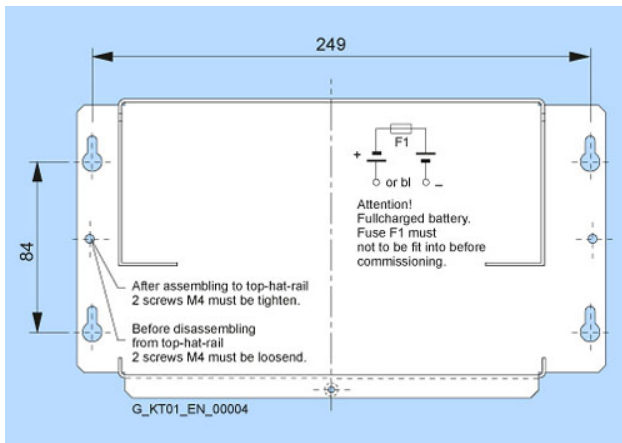

letzte Änderung:

Aug 26, 2011