




1/2' Corrugated 50ohm Eupen 5128 cable

Cable with standard UV resistant
PE jacket, halogen free according
to IEC 60754

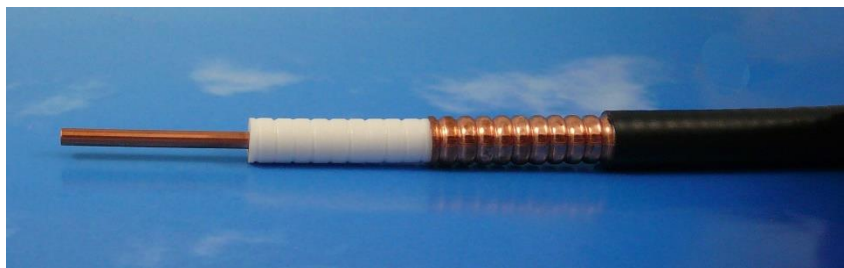

EAN: 5704717022144



Construction

• Inner conductor	
Material	copper clad aluminium wire
Diameter (mm) (in)	4.8 (0.19)
• Dielectric	
Material	gas-injected cellular polyethylene
Diameter (mm) (in)	12.4 (0.49)
• Outer conductor	
Material	corrugated copper tube
Diameter (mm) (in)	13.8 (0.54)
• Outer sheath	
Thickness (mm) (in)	1.1 (0.04)
Diameter (mm) (in)	16.0 (0.63)

Mechanical characteristics

• Minimum bending radius	
a) single bending (cm) (in)	7 (2.8)
b) 15 repeated bends (cm) (in)	12 (4.7)
• Maximum pulling strength (daN) (lb)	
94 (211)	
• Recommended temperature range	
- Storage	-70 to +85 °C (-94 to +185 °F)
- Installation	-40 to +60 °C (-40 to +140 °F)
- Operation	-55 to +85 °C (-67 to +185 °F)
• Max. length per hoisting grip (m) (ft)	
70 (230)	
• Maximum hanger spacing (m) (ft)	
1 (3.3)	
• Flat plate crush res. (kg/mm) (lb/in)	
1.5 (87)	
• Bending moment (Nm) (lb-ft)	
3.4 (2.5)	
• Approximate weight (kg/km) (lb/ft)	
225 (0.152)	

[1] The attenuation can be approximated by the formula:

$$\alpha(f[\text{MHz}]) = A \cdot \sqrt{f[\text{MHz}]} + B \cdot f[\text{MHz}] \quad (\text{dB}/100\text{m})$$

A = 0.21
B = 0.00052

Electrical characteristics

• Characteristic impedance (Ω)	50 $\pm$ 1
• Nominal capacity (pF/m) (pF/ft)	76 (23.2)
• Relative propagation velocity (%)	88
• Inductance ($\mu\text{H}/\text{m}$) ($\mu\text{H}/\text{ft}$)	0.189 (0.058)
• DC-resistance at 20°C (68°F)	
- inner conductor (Ω/km) ($\Omega/1000\text{ft}$)	1.48 (0.45)
- outer conductor (Ω/km) ($\Omega/1000\text{ft}$)	2.14 (0.65)
• RF peak voltage (kV)	1.6
• RF peak power (kW)	25.6
• Cut-off-frequency (GHz)	9.8
• Insulation resistance (M Ω .km)	>> 5000
• Attenuation^[1] and power rating	

Frequency	Attenuation at 20°C (68°F) ^[2]		Mean power rating ^[3]
(MHz)	(dB/100m)	(dB/100ft)	(kW)
10	0.67	0.204	11.79
20	0.95	0.290	8.31
30	1.17	0.357	6.77
80	1.92	0.585	4.11
100	2.15	0.655	3.67
150	2.65	0.808	2.98
200	3.07	0.936	2.57
300	3.79	1.155	2.08
400	4.41	1.345	1.79
450	4.69	1.430	1.68
500	4.96	1.512	1.59
600	5.46	1.665	1.45
700	5.92	1.805	1.33
800	6.36	1.939	1.24
894	6.74	2.055	1.17
960	7.01	2.137	1.13
1000	7.16	2.183	1.10
1500	8.91	2.716	0.89
1700	9.54	2.909	0.83
1800	9.85	3.003	0.80
1880	10.08	3.073	0.78
2000	10.43	3.180	0.76
2170	10.91	3.326	0.72
2200	10.99	3.351	0.72
2300	11.27	3.436	0.70
2400	11.54	3.518	0.68
2500	11.80	3.598	0.67
2700	12.32	3.756	0.64
3000	13.06	3.982	0.60
4000	15.36	4.683	0.51
6000	19.39	5.912	0.41

[2] Nominal values

[3] Ambient temperature = 40°C (104°F); temperature of inner conductor = 100°C (212°F);
VSWR = 1.0; no solar loading