



Nitrile

The world's leading disposable glove for chemical splash protection

- Proprietary Ansell material formulation offers enhanced chemical splash protection
- Soft nitrile provides high levels of comfort
- Robust design for superior durability
- Silicone free design is paint and finish process friendly
- Also available in packaging to fit vending machines



Industries

- Life Sciences
- Food Processing
- Automotive
- Machinery and Equipment
- Chemical

Recommended For

- Transferring liquids and solids
- Sample taking and processing
- Meat, Fish and Food Processing
- Industrial Production
- Maintenance
- Laboratory analysis
- Chemical Handling



TECHNICAL DATA SHEET

PRODUCT INFORMATION

| | 92-600 |
|-----------------------------------|---|
| Material | Nitrile |
| Color | Green |
| Glove Design | Powder-Free, Chlorinated, Smooth |
| Cuff | Beaded |
| Manufacturing/QMS Audit Standards | ISO 9001:2008 |
| Regulatory/Standards Compliance | Category III, EAC TP TC 019:2011, EN 374:2003 Low Chemical Resistant, EN 374:2003 Microorganism, EN ISO 374-1:2016, EN 420:2003 + A1:2009, EN ISO 374-5:2016, FDA21 CFR 177-2600, ISO 9001 |
| Packaging | 100 gloves per dispenser 10 dispensers per case 1000 gloves per case |
| Storage | Keep out of direct sunlight; store in a cool and dry place. Keep away from sources of ozone or ignition. |
| Country of Origin | Malaysia, Sri Lanka, Thailand |
| User Needs Segment | Robust |
| Available sizes | S (6.5 - 7), M (7.5 - 8), L (8.5 - 9), XL (9.5 - 10) |
| Sensitisers | <ul style="list-style-type: none"> Zinc Dibutylthiocarbamate (ZDBC) <p><i>Only a very small number of users may be sensitive to this ingredient(s) and hence may develop irritant and/or allergic contact reactions.</i></p> |

PHYSICAL PROPERTIES

| | Typical Values | | Testing Method |
|---|--|-------|----------------------|
| Length (mm/inches) | 240 / 9.5 | | ASTM D3767, EN420 |
| Freedom from Holes (Inspection level I) | 4.0 AQL (North & South America) / 1.5 AQL (Europe, Middle East, Africa, Asia, Pacific) | | ASTM D5151, EN 455-1 |
| Palm Thickness (mm/mils) | 0.12 / 4.7 | | ASTM D3767, EN420 |
| Finger Thickness (mm/mils) | 0.16 / 6.2 | | ASTM D3767, EN420 |
| | BEFORE AGING | | AFTER AGING |
| Ultimate Tensile Strength (MPa) | ≥ 18 | ≥ 18 | ASTM D412 & D573 |
| Elongation at Break (%) | ≥ 500 | ≥ 400 | ASTM D412 |
| Force at break (N) | ≥ 6 | ≥ 6 | EN 455-2 |


ORDERING INFORMATION

| Size | S (6.5 - 7) | M (7.5 - 8) | L (8.5 - 9) | XL (9.5 - 10) |
|---------------------|-------------|-------------|-------------|---------------|
| Ansell Product Code | 92600070 | 92600080 | 92600090 | 92600100 |

Technology



Performance Standards and Regulatory Compliance

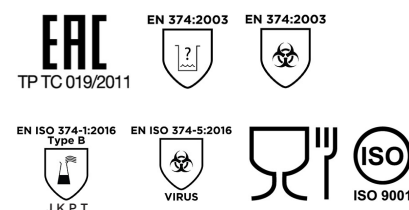

For additional information visit us at www.ansell.com, or call us at

Europe, Middle East & Africa Region

Ansell Healthcare Europe NV
T: +32 (0) 2 528 74 00
F: +32 (0) 2 528 74 01

Asia Pacific Region

Ansell Global Trading Center (Malaysia) Sdn Bhd
T: +603 8310 6688
F: +603 8310 6699

North America Region

Ansell Healthcare Products LLC
T: +1 800 800 0444
F: +1 800 800 0445

Latin America & Caribbean Region

Ansell Commercial Mexico S.A. de C.V.
T: +52 442 248 1544 / 248 3133

Australia

Ansell Limited
T: +61 1800 337 041
F: +61 1800 803 578

Russia

Ansell PYC
Ten. +7 495 258 13 16

Ansell, ® and ™ are trademarks owned by Ansell Limited or one of its affiliates. US Patented and US and non-US Patents Pending: www.ansell.com/patentmarking © 2020 Ansell Limited. All Rights Reserved.

Neither this document nor any other statement made herein by or on behalf of Ansell should be construed as a warranty of merchantability or that any Ansell product is fit for a particular purpose. Ansell assumes no responsibility for the suitability or adequacy of an end user's selection of gloves for a specific application.