




SRG LPG Low Pressure Jumbo Regulator Type 592 Single Stage

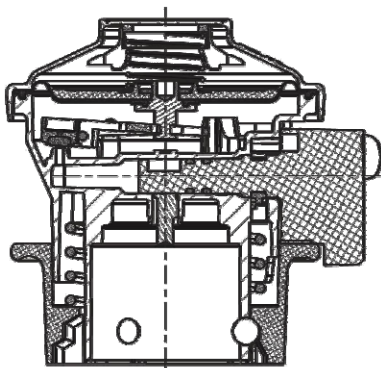

Jumbo

Inlet Connection	Outlet Connections
♦ 35 mm to EN 12864, fig. G.56	♦ Nozzle 8, for hose with 8 mm inner dia., to EN 12864, fig. H.50 ♦ Nozzle 10, for hose with 10 mm inner dia., to EN 12864, fig. H.51 ♦ G1/4A-LH, to DIN 8542 ♦ other outlet connections available on request
Outlet Pressure	Color
♦ 28 mbar ♦ 30 mbar ♦ 50 mbar ♦ other settings available on request	♦ blue grey ♦ black ♦ other colors available on request

Product

Description:

The SRG Jumbo Regulator in connection with the SRG cylinder valve reduces the high gas pressure in the cylinder to the low service pressure.

The regulator can be equipped with a flow limiter which cuts off the gas flow automatically at approx. 1500 l air/hr. (under normal cylinder pressure) in case of a ruptured gas tubing or the gas tubing is pulled off. After cut-off the gas escape is limited to maximum 35 l air/hr.

The regulator can be equipped with a pressure relief valve in the low pressure stage, opening at a nominal pressure of 150 mbar.

Materials and Standards:

The SRG Jumbo Regulator is made of a zinc die casting (body and cover) and other corrosion-resistant and LPG-proof materials such as brass, stainless steel and acetal resin.

The rubber materials used are developed and produced according to the requirements of **EN 549** as well as in accordance with SRG's own stringent specifications.

Quality

standards:

SRG's quality-control system carries an **ISO 9001** certificate and is continually assessed by the Notified Body.

Capacity:

Rated for inlet pressure of between 0,3 and 7,5 bar (BUTANE) the regulator has a capacity of 1,6 kg gas/hr.

Operation:

The regulator is fixed to the cylinder valve by means of stainless steel balls which are held in the ball-groove of the cylinder valve under the pressure of a spring loaded locking ring. The snap-in action of the coupling ensures a tight connection between the regulator and the cylinder valve.

Connection lever and on/off tap interlocked to ensure easy and safe handling:


- Connection is simple, by just pressing down
- Cannot be unintentionally disconnected.
- Switching on is possible only when the regulator is connected properly with the cylinder valve

Packaging:

The SRG Jumbo Regulator comes packed separately in a folding box. The folding boxes are packed in cardboard boxes.



SRG LPG 2-Stage Low Pressure Jumbo Regulator Type 592 Two Stage

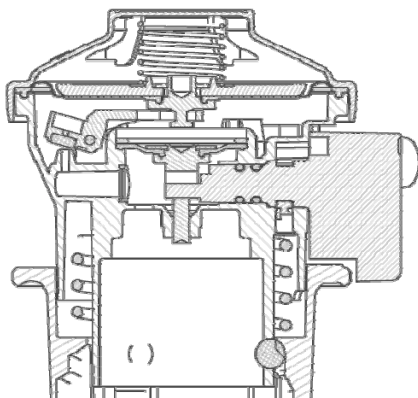

PATENTED

Jumbo

Inlet Connection	Outlet Connections
♦ 35 mm to EN 12864, fig. G.56	♦ Nozzle 8 , for hose with 8 mm inner dia., to EN 12864, fig. H.50 ♦ Nozzle 10 , for hose with 10 mm inner dia., to EN 12864, fig. H.51 ♦ G1/4A-LH , to DIN 8542 ♦ other outlet connections available on request
Outlet Pressure	Color
♦ 28 mbar ♦ 30 mbar ♦ 50 mbar ♦ other settings available on request	♦ blue grey ♦ black ♦ other colors available on request

Product

Description:

The SRG Jumbo Regulator in connection with the SRG cylinder valve reduces the high gas pressure in the cylinder to the low service pressure. The double stage design ensures an excellent regulator performance and characteristic with a maximum pressure of 3 bar between the cylinder valve and the regulating device for any type of liquefied gas.

The regulator can be equipped with a flow limiter which cuts off the gas flow automatically at approx. 1500 l air/hr. (under normal cylinder pressure) in case of a ruptured gas tubing or the gas tubing is pulled off. After cut-off the gas escape is limited to maximum 35 l air/hr.

The regulator can be equipped with a pressure relief valve in the low pressure stage, opening at a nominal pressure of 150 mbar.

Materials and Standards:

The SRG Jumbo Regulator is made of a zinc die casting (body and cover) and other corrosion-resistant and LPG-proof materials such as brass, stainless steel and acetal resin.

The rubber materials used are developed and produced according to the requirements of **EN 549** as well as in accordance with SRG's own stringent specifications.

Quality standards:

SRG's quality-control system carries an **ISO 9001** certificate and is continually assessed by the Notified Body.

Capacity:

Rated for inlet pressure of between 0,3 and 7,5 bar (BUTANE) the regulator has a capacity of 1,6 kg gas/hr.

Operation:

The regulator is fixed to the cylinder valve by means of stainless steel balls which are held in the ball-groove of the cylinder valve under the pressure of a spring loaded locking ring. The snap-in action of the coupling ensures a tight connection between the regulator and the cylinder valve.

Connection lever and on/off tap interlocked to ensure easy and safe handling:

- Connection is simple, by just pressing down
- Cannot be unintentionally disconnected.
- Switching on is possible only when the regulator is connected properly with the cylinder valve

Packaging:

The SRG Jumbo Regulator comes packed separately in a folding box. The folding boxes are packed in cardboard boxes.

592 / 1539-000