

SAN[®]
Electro Heat



Comfort Radiators

Radiators and Towel Warmers

Index	Side
Panel Radiators	
Yali Digital (YALI D)	4
Yali Comfort (YALI C)	6
Yali Ramo (YALI R).....	8
Yali Parada (YALI P)	10
Yali GV (YALI GV)	12
Kaba (KABA, KABA P)	14
Tempco control systems	
Touch screen with WiFi connection.....	16
Decorative Radiators	
Epok H	18
Epok V	20
Tamari H	22
Tamari V.....	24
Langila	26
Sanbe	28
Towel Warmers	
Nila.....	30
Muria.....	32
Athena A	34
Athena E	36
Athena S	38
Jarl.....	40
Alaid.....	42
Bandai	44
Others:	
Accessories	46
Cross List.....	47



Yali Digital - Panel Radiator

Yali Digital is a modernly designed panel radiator with a series of new features. Ideal for any room in the house, the Yali Digital offers superb temperature controllability, with a clear visual display discreetly housed on the side panel. Like many of the Yali range, the Yali Digital has a touch-screen control as an option and can easily be connected to WiFi. The touch-screen control is future-proof and easily upgraded when new functions become available. For double-panelled Yali radiators, the panels can be controlled in parallel (together at the same time) or in sequence (cascade), where both radiant and convective heat is used. This is most useful with a large difference between the set and measured room temperature. When a lot of power is required to bridge that temperature gap, the combination of heat types makes a real difference. When the temperature difference is small, only the front panel is required. This involves more radiant heat from the front, and less heat lost to the rear wall, since the inactive backpanel functions like a heat-screen.

TECHNICAL DATA

- Oil-filled radiator with vegetable oil.
- Frost protection (0,5-10°C)
- Made from strong steel of the highest quality.
- Hard-wearing white epoxy paint (RAL 9016).
- Can be connected to wired external programmer, wireless programmer or central controller with WiFi facilities
- Simple to use, rapid heating and even temperature across the entire surface.
- System for locking the mounting device.
- Quiet, odour-free and non-allergenic.
- The radiators have convector plates and are for right-hand mounting
- Sequential temperature control of the front and rear panel.
- Window open function.
- Lockable thermostat unit.

THERMOSTAT


- Advanced thermostat with precise regulation. Several temperature reduction options.
- Adjustable maximum surface temperature of 90°C (normal) and 75 or 60°C (reduced). The 75 and 60°C modes reduce the output of the radiator to 70 and 55% for a single and 90 and 80% for a double panel.
- Sequential temperature control of the front and rear panel.
- Window open function.
- Lockable thermostat unit.
- Thermostat guard made from flame retardant and UV resistant ABS-PC V0.
- The temperature reduction can be activated manually or with a separate control wire connected to a central timer.
- The radiator is supplied with a cable with a "plug-in contact" for connecting the radiator and the enclosed wall outlet box.
- Can be controlled from other radiators or control other radiators in a master-slave configuration.

ACCESSORIES

- Can be supplied with a plug (230 V) instead of a wall outlet box.
- When ordering, use the same model designation as the standard radiators, but with the supplement P (YALI D P). The central temperature reduction and master-slave option are not available in this version.
- Splash proof cover for IP 44., art. nr.: 8555095.

PACKAGE

- Delivered with wall brackets and screws for permanent installation.
- The radiators have convector plates and are to be mounted with the thermostat on the right hand side.

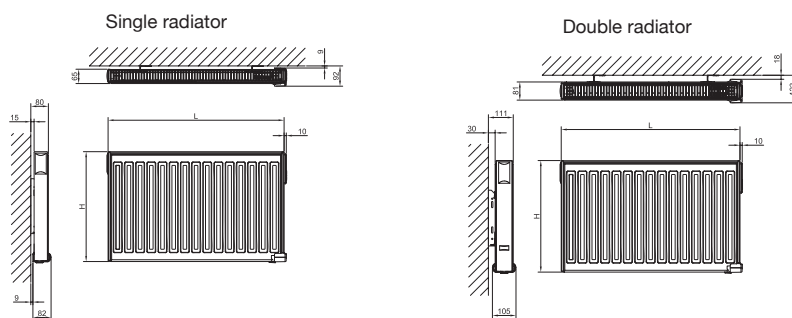

HEIGHT 300 MM

Model	Article	Power W	Height mm	Length mm	Voltage	Weight
Single	8501058	250	300	400	230	5
Single	8501059	250	300	400	400	5
Single	8501060	500	300	800	230	9
Single	8501061	500	300	800	400	9
Double	8501062	500	300	500	230	10
Double	8501063	500	300	500	400	20
Single	8501064	750	300	1100	230	14
Single	8501065	750	300	1100	400	14
Double	8501066	750	300	800	230	15
Double	8501067	750	300	800	400	15
Single	8501068	1000	300	1500	230	10
Single	8501069	1000	300	1500	400	10
Double	8501070	1000	300	1000	230	19
Double	8501071	1000	300	1000	400	19
Single	8501072	1250	300	1300	230	24
Single	8501073	1250	300	1300	400	24
Double	8501074	1500	300	1600	230	30
Double	8501075	1500	300	1600	230	30
Double	8501076	2000	300	2000	230	37
Double	8501077	2000	300	2000	400	37

HEIGHT 500 MM

Model	Article	Power W	Height mm	Length mm	Voltage	Weight
Single	8501078	500	500	550	230	10
Single	8501079	500	500	550	400	10
Double	8501080	500	500	400	230	12
Double	8501081	500	500	400	400	12
Single	8501082	750	500	800	230	14
Single	8501083	750	500	800	400	14
Double	8501084	750	500	500	230	15
Double	8501085	750	500	500	400	15
Single	8501086	1000	500	1050	230	19
Single	8501087	1000	500	1050	400	19
Double	8501088	1000	500	650	230	20
Double	8501089	1000	500	650	400	20
Single	8501090	1250	500	1300	230	23
Single	8501091	1250	500	1300	400	23
Double	8501092	1250	500	800	230	24
Double	8501093	1250	500	800	400	24
Double	8501094	1500	500	950	230	28
Double	8501095	1500	500	950	400	28
Double	8501096	2000	500	1250	230	37
Double	8501097	2000	500	1250	400	37



Splash proof cover for IP44



- Can be connected to internet (Smart phone, tablet, computer) via router.
- Can be connected to GSM module
- Change operation modes and temperature.
- Collect data (consumption).

SAN Electro Heat a/s

Gillelejevej 30b - DK-3230 Graested - Denmark

Tel.: +45 48 39 88 88 - Fax: +45 48 39 88 98 - info@san-as.com - www.san-as.com

CVR No.: 42 16 59 13



Yali Comfort - Panel Radiator

For new-build and renovations alike, the Yali Comfort is a great mid-range option for heating the family home. Electronic thermostat with analogue controls and temperature / operating mode dials, give this standard electric radiator a simple range of functions that are easily controlled by the user. Front temperature can be set and the unit can be wired to an external clock for timed operation.

TECHNICAL DATA

- Oil-filled radiator with vegetable oil.
- Frost protection (7°C)
- Made from strong steel of the highest quality.
- Hard-wearing white epoxy paint (RAL 9016).
- Can be connected to wired external programmer.
- Simple to use, rapid heating and even temperature across the entire surface.
- System for locking the mounting device.
- Quiet, odour-free and non-allergenic.
- The radiators have convector plates and are for right-hand mounting

THERMOSTAT

- Advanced thermostat with precise regulation. Several temperature reduction options: 3.5°C (manual) or freely adjustable 0-15°C (via external control system).
- Adjustable maximum surface temperature to 75 or 60°C. The 75 and 60°C modes reduce the output of the radiator to 70 and 55% for a single and 90 and 80% for a double panel.
- Thermostat guard made from flame retardant and UV resistant ABS-PC V0.
- The temperature reduction can be activated manually or with a separate control wire connected to a central timer.
- The radiator is supplied with a cable with a "plug-in contact" for connecting the radiator and the enclosed wall outlet box.
- Can be controlled from other radiators or control other radiators in a master-slave configuration.


ACCESSORIES

- Can be supplied with a plug (230 V) instead of a wall outlet box. When ordering, use the same model designation as the standard radiators, but with the supplement P (YALI D P). The central temperature reduction and master-slave

- option are not available in this version.
- Splash proof cover for IP 44.

PACKAGE

- Delivered with wall brackets and screws for permanent installation.
- The radiators have convector plates and are to be mounted with the thermostat on the right hand side.

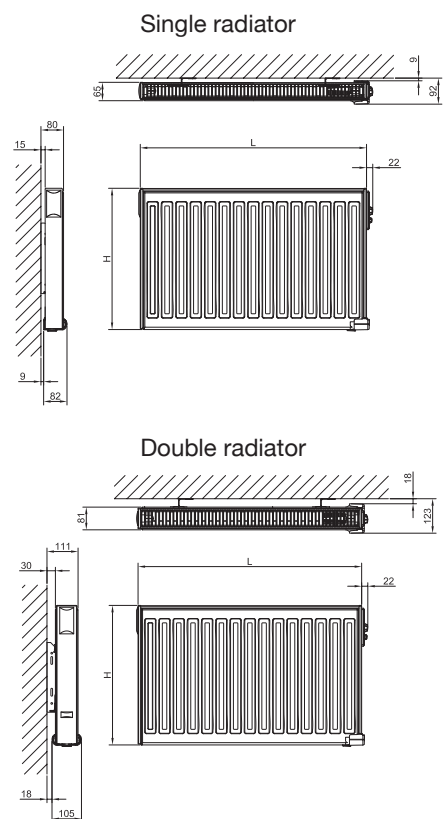

HEIGHT 300 MM

Model	Article	Power W	Height mm	Length mm	Voltage	Weight
Single	8501010	250	300	400	230	5
Single	8501011	250	300	400	400	5
Single	8501012	500	300	800	230	9
Single	8501013	500	300	800	400	9
Double	8501014	500	300	500	230	10
Double	8501015	500	300	500	400	10
Single	8501016	750	300	1100	230	14
Single	8501017	750	300	1100	400	14
Double	8501018	750	300	800	230	15
Double	8501019	750	300	800	400	15
Double	8501020	1000	300	1000	230	19
Double	8501021	1000	300	1000	400	19
Double	8501022	1250	300	1300	230	24
Double	8501023	1250	300	1300	400	24

HEIGHT 500 MM

Model	Article	Power W	Height mm	Length mm	Voltage	Weight
Single	8501024	500	500	550	230	10
Single	8501025	500	500	550	400	10
Double	8501026	500	500	400	230	12
Double	8501027	500	500	400	400	12
Single	8501028	750	500	800	230	14
Single	8501029	750	500	800	400	14
Double	8501030	750	500	500	230	15
Double	8501031	750	500	500	400	15
Single	8501032	1000	500	1050	230	19
Single	8501033	1000	500	1050	400	19
Double	8501034	1000	500	650	230	20
Double	8501035	1000	500	650	400	20
Single	8501036	1250	500	1300	230	23
Single	8501037	1250	500	1300	400	23
Double	8501038	1250	500	800	230	24
Double	8501039	1250	500	800	400	24
Double	8501040	1500	500	950	230	28
Double	8501041	1500	500	950	400	28



Splash proof cover for
IP44.

SAN Electro Heat a/s

Gillelejevej 30b - DK-3230 Graested - Denmark

Tel.: +45 48 39 88 88 - Fax: +45 48 39 88 98 - info@san-as.com - www.san-as.com

CVR No.: 42 16 59 13



Yali Parada - Panel Radiator

Digital controls and bright digital display make the Yali Parada a simple yet powerful addition to any home. Fully programmable temperature range, operating modes and surface temperature bring flexibility and ease of use within the reach of everyone. Enjoy the smooth panel design of this sleek oil-filled radiator from LVI. Like all the Yali range, the Yali Parada is designed with two independent heating panels, type 22, front and rear, which offer a more precise and economical way to heat the home. The Yali Parada is also available in a single panel variety, type 11. Yali Parada has the same intelligent features as the Yali Digital: open window function and a digital thermostat that can be easily connected to wired systems, wireless systems or WiFi. This radiator also offers separate temperature control of front and rear panels for better energy efficiency and adjustable maximum surface temperature for example child safety feature.

TECHNICAL DATA

- Oil-filled radiator with vegetable oil.
- Frost protection (0,5-10°C)
- Made from strong steel of the highest quality.
- Hard-wearing white epoxy paint (RAL 9016).
- Can be connected to external programmer, wireless programmer or central controller with WiFi facilities
- Simple to use, rapid heating and even temperature across the entire surface.
- System for locking the mounting device.
- Quiet, odour-free and non-allergenic.
- The radiators have convector plates and are for right-hand mounting

THERMOSTAT

- Advanced thermostat with precise regulation. Several temperature reduction options.
- Adjustable maximum surface temperature of 90°C (normal) and 75 or 60°C (reduced). The 75 and 60°C modes reduce the output of the radiator to 70 and 55% for a single and 90 and 80% for a double panel.
- Sequential temperature control of the front and rear panel.
- Window open function.
- Lockable thermostat unit.
- Thermostat guard made from flame retardant and UV resistant ABS-PC V0.


- The temperature reduction can be activated manually or with a separate control wire connected to a central timer.
- The radiator is supplied with a cable with a "plug-in contact" for connecting the radiator and the enclosed wall outlet box.
- Can be controlled from other radiators or control other radiators in a master-slave configuration.

ACCESSORIES

- Splash proof cover for IP 44.

PACKAGE

- Delivered with wall brackets and screws for permanent installation.
- The radiators have convector plates and are to be mounted with the thermostat on the right hand side.

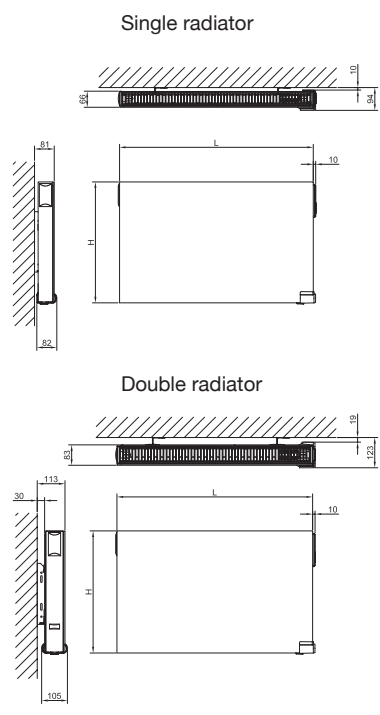

HEIGHT 300 MM

Model	Article	Power W	Height mm	Length mm	Voltage	Weight
Single	8501118	250	300	400	230	6
Single	8501119	250	300	400	400	6
Single	8501120	500	300	800	230	11
Single	8501121	500	300	800	400	11
Double	8501122	500	300	500	230	11
Double	8501123	500	300	500	400	11
Single	8501124	750	300	1100	230	17
Single	8501125	750	300	1100	400	17
Double	8501126	750	300	800	230	17
Double	8501127	750	300	800	400	17
Single	8501128	1000	300	1500	230	14
Single	8501129	1000	300	1500	400	14
Double	8501130	1000	300	1000	230	22
Double	8501131	1000	300	1000	400	22
Double	8501132	1250	300	1300	230	27
Double	8501133	1250	300	1300	400	27
Double	8501134	1500	300	1600	230	34
Double	8501135	1500	300	1600	230	34
Double	8501136	2000	300	2000	230	42
Double	8501137	2000	300	2000	400	42

HEIGHT 500 MM

Model	Article	Power W	Height mm	Length mm	Voltage	Weight
Single	8501138	500	500	550	230	12
Single	8501139	500	500	550	400	12
Double	8501140	500	500	400	230	14
Double	8501141	500	500	400	400	14
Single	8501142	750	500	800	230	17
Single	8501143	750	500	800	400	17
Double	8501144	750	500	500	230	17
Double	8501145	750	500	500	400	17
Single	8501146	1000	500	1050	230	23
Single	8501147	1000	500	1050	400	23
Double	8501148	1000	500	650	230	22
Double	8501149	1000	500	650	400	22
Single	8501150	1250	500	1300	230	29
Single	8501151	1250	500	1300	400	29
Double	8501152	1250	500	800	230	27
Double	8501153	1250	500	800	400	27
Double	8501154	1500	500	950	230	32
Double	8501155	1500	500	950	400	32
Double	8501156	2000	500	1250	230	42
Double	8501157	2000	500	1250	400	42



Splash proof cover for IP44.



- Can be connected to internet (Smart phone, tablet, computer) via router.
- Can be connected to GSM module
- Change operation modes and temperature.
- Collect data (consumption).

SAN Electro Heat a/s

Gillelejevej 30b - DK-3230 Græsted - Denmark

Tel.: +45 48 39 88 88 - Fax: +45 48 39 88 98 - info@san-as.com - www.san-as.com

CVR No.: 42 16 59 13



Yali Ramo - Panel Radiator

The slimline Yali Ramo has an attractive sectioned front, with straight side panels and a decorative upper grid. The smooth subtlety of the Yali series is showcased to the full in Yali Ramo - an exquisitely designed flat fronted radiator graced by a succession of distinctive shallow grooves. Like all systems in the series, comfortable, radiant warmth is provided by environmentally friendly vegetable oil. Yali Ramo has the same intelligent features as the Yali Digital: open window function and a digital thermostat that can be easily connected to wired systems, wireless systems or WiFi. This radiator also offers separate temperature control of front and rear panels for better energy efficiency and adjustable maximum surface temperature for example child safety feature

TECHNICAL DATA

- Oil-filled radiator with vegetable oil.
- Frost protection (0,5-10°C)
- Made from strong steel of the highest quality.
- Hard-wearing white epoxy paint (RAL 9016).
- Can be connected to wired external programmer, wireless programmer or central controller with WiFi facilities
- Simple to use, rapid heating and even temperature across the entire surface.
- System for locking the mounting device.
- Quiet, odour-free and non-allergenic.
- The radiators have convector plates and are for right-hand mounting

THERMOSTAT

- Advanced thermostat with precise regulation. Several temperature reduction options.
- Adjustable maximum surface temperature of 90°C (normal) and 75 or 60°C (reduced). The 75 and 60°C modes reduce the output of the radiator to 70 and 55% for a single and 90 and 80% for a double panel.
- Sequential temperature control of the front and rear panel.
- Window open function.
- Lockable thermostat unit.
- Thermostat guard made from flame retardant and UV resistant ABS-PC V0.
- The temperature reduction can be activated manually or with a separate control wire connected to a central timer.
- The radiator is supplied with a cable with a "plug-in con-

tact" for connecting the radiator and the enclosed wall outlet box.

- Can be controlled from other radiators or control other radiators in a master-slave configuration.


ACCESSORIES

- Splash proof cover for IP 44.


PACKAGE

- Delivered with wall brackets and screws for permanent installation.
- The radiators have convector plates and are to be mounted with the thermostat on the right hand side.

Single radiator

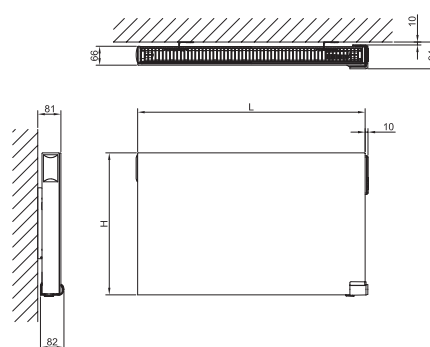

Double radiator

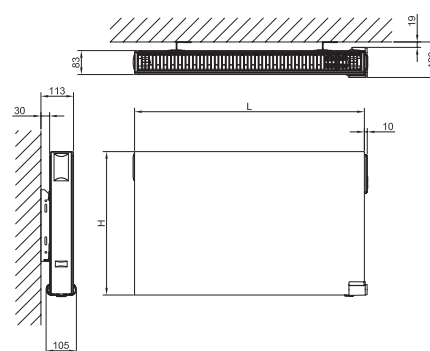

HEIGHT 300 MM

Model	Article	Power W	Height mm	Length mm	Voltage	Weight
Single	8501158	250	300	400	230	6
Single	8501159	250	300	400	400	6
Single	8501160	500	300	800	230	11
Single	8501161	500	300	800	400	11
Double	8501162	500	300	500	230	11
Double	8501163	500	300	500	400	11
Single	8501164	750	300	1100	230	17
Single	8501165	750	300	1100	400	17
Double	8501166	750	300	800	230	17
Double	8501167	750	300	800	400	17
Single	8501168	1000	300	1500	230	14
Single	8501169	1000	300	1500	400	14
Double	8501170	1000	300	1000	230	22
Double	8501171	1000	300	1000	400	22
Single	8501172	1250	300	1300	230	27
Single	8501173	1250	300	1300	400	27
Double	8501174	1500	300	1600	230	34
Double	8501175	1500	300	1600	230	34
Double	8501176	2000	300	2000	230	42
Double	8501177	2000	300	2000	400	42

HEIGHT 500 MM

Model	Article	Power W	Height mm	Length mm	Voltage	Weight
Single	8501178	500	500	550	230	12
Single	8501179	500	500	550	400	12
Double	8501180	500	500	400	230	14
Double	8501181	500	500	400	400	14
Single	8501182	750	500	800	230	17
Single	8501183	750	500	800	400	17
Double	8501184	750	500	500	230	17
Double	8501185	750	500	500	400	17
Single	8501186	1000	500	1050	230	23
Single	8501187	1000	500	1050	400	23
Double	8501188	1000	500	650	230	22
Double	8501189	1000	500	650	400	22
Single	8501190	1250	500	1300	230	29
Single	8501191	1250	500	1300	400	29
Double	8501192	1250	500	800	230	27
Double	8501193	1250	500	800	400	27
Double	8501194	1500	500	950	230	32
Double	8501195	1500	500	950	400	32
Double	8501196	2000	500	1250	230	42
Double	8501197	2000	500	1250	400	42



Splash proof cover for IP44.



- Can be connected to internet (Smart phone, tablet, computer) via router.
- Can be connected to GSM module
- Change operation modes and temperature.
- Collect data (consumption).

SAN Electro Heat a/s

Gillelejevej 30b - DK-3230 Græsted - Denmark

Tel.: +45 48 39 88 88 - Fax: +45 48 39 88 98 - info@san-as.com - www.san-as.com

CVR No.: 42 16 59 13



Yali GV - Panel Radiator

The new vertical Yali GV sits, as the name says, vertically on the wall. Perfect when you do not have wall space below large windows or when you want to save wall space and utilize vertical wall surfaces. The electronic thermostat with digital display is wall mounted, wireless and programmable in six fixed modes (auto, comfort, temperature reduction, temperature regulation, frost protection and stop). You can control one or more Yali GV radiators in the same room with just one remote.

TECHNICAL DATA

- Oil-filled radiator with vegetable oil.
- Made from strong steel of the highest quality.
- Hard-wearing white epoxy paint (White RAL 9016).
- Quiet, odour-free and non-allergenic.

THERMOSTAT

- Electronic thermostat with digital display. Wireless and programmable in six fixed positions (auto, comfort, temperature reduction, temperature regulation, frost protection and stop) with wall-mounted thermostat. You can control one or more Yali GV, Langila, Sanbe, Epok and Tamari radiators in the same room with just one remote control.

ACCESSORIES

- Splash proof cover for an upgrade to IP44.

PACKAGE

- Wall mounts with and without brackets.

HEIGHT 1800 MM

Model	Article	Power W	Width mm	Height mm	Voltage	Weight
Single	8558734	750	304	1800	230	27
Single	8558735	750	304	1800	400	27
Single	8558736	1000	454	1800	230	35
Single	8558737	1000	454	1800	400	35
Single	8558738	1250	604	1800	230	44
Single	8558739	1250	604	1800	400	44

Height 1950 MM

Model	Article	Power W	Width mm	Height mm	Voltage	Weight
Single	8558752	1500	604	1950	230	49
Single	8558753	1500	604	1950	400	49

HEIGHT 2100 MM


Model	Article	Power W	Width mm	Height mm	Voltage	Weight
Single	8558754	1750	604	2100	230	54
Single	8558755	1750	604	2100	400	54
Single	8558756	2000	754	2100	230	64
Single	8558757	2000	754	2100	400	64



Splash proof cover for IP44.



Wall-mounted electronic thermostat (wireless) with a digital display.

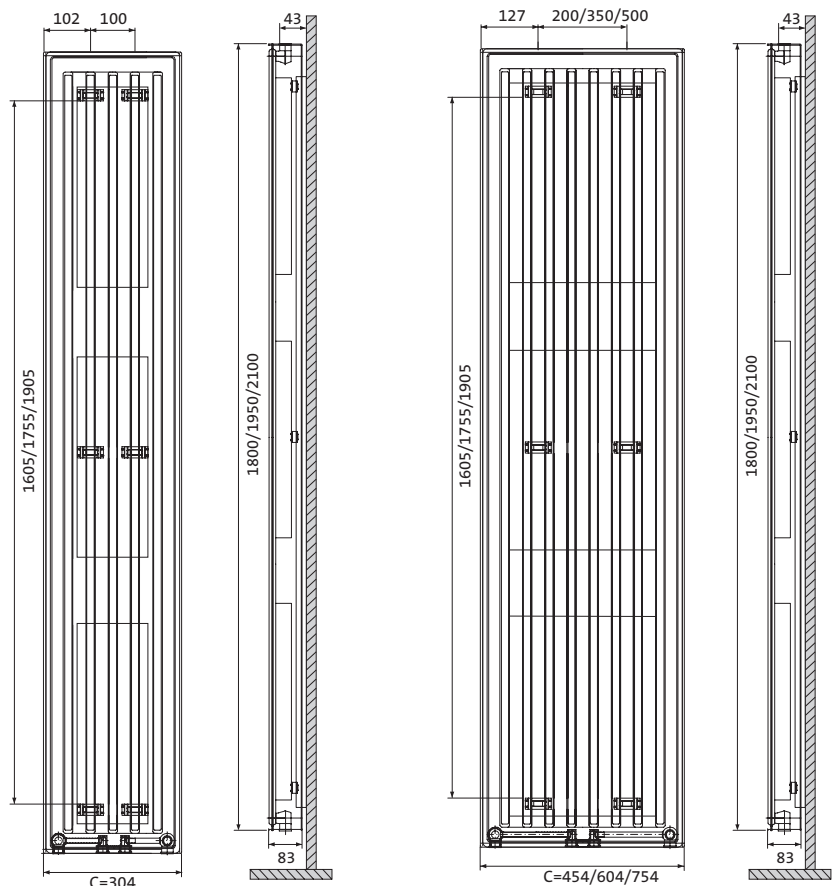

SAN Electro Heat a/s

Gillelejevej 30b - DK-3230 Græsted - Denmark

Tel.: +45 48 39 88 88 - Fax: +45 48 39 88 98 - info@san-as.com - www.san-as.com

CVR No.: 42 16 59 13



Kaba - Panel Radiator

The Kaba is a perfect supplemental heat source for those spaces in the home used infrequently. The garage or work-room, for instance, places where you might not spend a lot of time regularly, but when you do, you'd like it to be comfortable. The Kaba is built for function, and comes with foot brackets so it can be used as a mobile unit too. A simple temperature dial makes this a straightforward choice for those areas in the home that just need a little extra boost in warmth.

TECHNICAL DATA

- Oil-filled radiator with vegetable oil.
- Frost protection.
- Made from strong steel of the highest quality.
- Hard-wearing white epoxy paint (White RAL 9016).
- Simple to use, rapid heating and even temperature across the entire surface.
- System for locking the mounting device.
- Quiet, odour-free and non-allergenic.
- Can be wall-mounted or free standing with mains connection via plug

THERMOSTAT


- Electronic thermostat with calibration option.
- Lockable thermostat unit.
- Thermostat guard made from impact-resistant polycarbonate.

ACCESSORIES

- Can be supplied with a plug.
When ordering, use the same model designation as the standard radiators, but with the supplement P (KABA P).

PACKAGE

- Delivered with wall brackets and screws for permanent installation.
- Kaba P is also supplied with feet for free standing location.

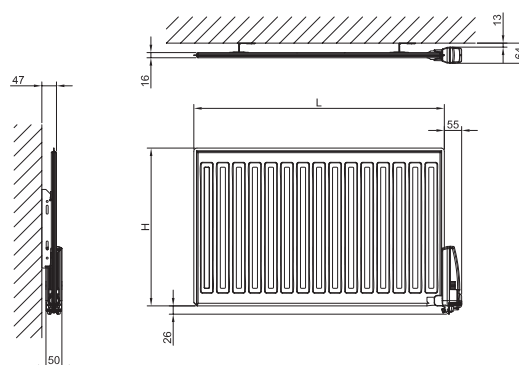

HEIGHT 300 MM

Model	Article	Power W	Height mm	Length mm	Voltage	Weight
Single	8501000	250	300	600	230	5
Single	8501001	250	300	60	400	5
Single	8501002	500	300	1100	230	9
Single	8501003	500	300	1100	400	9

HEIGHT 500 MM

Model	Article	Power W	Height mm	Length mm	Voltage	Weight
Single	8501004	750	500	1050	230	14
Single	8501005	800	500	1050	400	14
Single	8501006	1000	500	1400	230	18
Single	8501007	1000	500	1400	400	18
Single	8501008	1250	500	1750	230	23
Single	8501009	1250	500	1750	400	23



SAN Electro Heat a/s

Gillelejevej 30b - DK-3230 Græsted - Denmark

Tel.: +45 48 39 88 88 - Fax: +45 48 39 88 98 - info@san-as.com - www.san-as.com

CVR No.: 42 16 59 13



Touch Screen with WiFi connection

Your customers can experience a revolution in comfort convenience with new Yali wi-fi controllability. No more returning to a cold house when they can control the Yali Digital, Parada or Ramo remotely. When connected to a wireless central programmer, these Yali models can be effortlessly controlled via any web browser. Use a Smartphone to have any home blissfully warm before walking through the door. This innovation in indoor heating means that your customers have the added reassurance of controllable comfort, only from SAN.

TECHNICAL DATA

GSM

- Easy to install and control with SMS
- Can be installed wherever there is GSM coverage
- GSM uses a voltage adapter for 230V mains power.
- Control via conductor to the radiator control signal input.
- Can be connected via conductor to the clock for wireless communication*
- GSM module output relay can handle 250 V/5 A. 50 radiators can be connected without problem. In order to protect the GSM module, the output relay can be connected via contacts to radiators or other products.
- A SIM card from any operator may be used.
Size used: Mini-SIM (not included)
- Function: Sets the heating system to a lower temperature or comfort mode without being there.
- The module sends a warning SMS when there is an interruption in power longer than 3 minutes.
- Possible to get information on indoor or outdoor temperatures via SMS query.
- Receives information on fire alarms and burglar alarms via SMS. Does not function in the event of a power outage –

no battery back-up for these functions.

CLOCK

- Easy to install and to program
- Saves energy by maintaining a lower temperature when no one is in the house.
- The clock is battery-operated - 3 V with 2 AA batteries.
- Can be combined with the GSM module.
- Function: Weekly program with up to four zones for setting the heating system to comfort, reduced (night) temperature, anti-freeze or off mode.
- Communicates directly with Epok, Tamari, Yali GV, Sanbe, Langila, Yali Digital, Parada and Ramo. Langila, Yali Comfort and Milo require Tempco Connect; these radiators only offer comfort and reduced temperature modes.

RECEIVER

- Allows clock control of Yali Comfort and Milo (not Kaba).
- Tempco Connect with zero is used for: 230 V radiators and 400 V radiators where zero is pulled out.
- Tempco Connect with zero is used for: 400 V radiators where zero is not pulled out.
- Multiple radiators (however, no more than 10) can be connected to a Tempco Connect unit.


WIRELESS TOUCH SCREEN

- Can be connected to internet (Smart phone, tablet, computer) via router.
- Can be connected to GSM module.
- Change operation modes and temperature.
- Collect data (consumption.)

Model	Article	Height mm	Width mm	Voltage	Description
TEMPCO TOUCHSCREEN	8500014	-	-	-	Wireless Touch screen (WiFi)
TEMPCO GSM NC EH	8580214	170	50	230	Controller
TEMPCO CLOCK RF EH	8580215	130	75	3	Central clock
TEMPCO CONNECT 1M RF	8580216	170	70	230	Receiver with zero
TEMPCO CONNECT 1M RF	8580217	170	70	400	Receiver without zero

1. CONTROL WITH GSM

Wired temperature control to all radiators

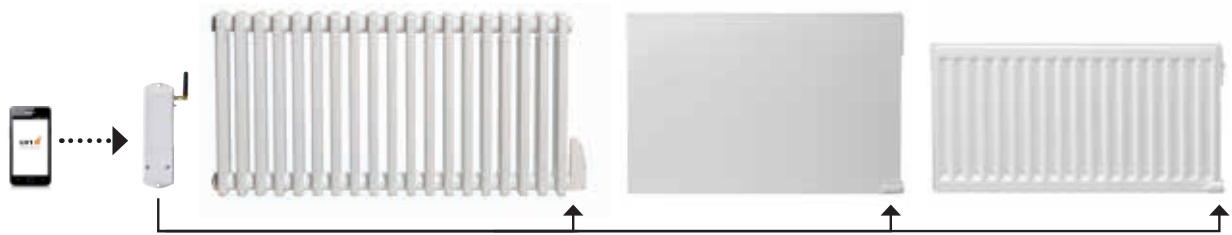


2. CONTROL WITH CLOCK

Temperature control with weekly plan.


Wireless directly to Epok, Tamari, Yali GV, Langila, Sanbe and to Yali Digital, Parada and Ramo.

Wireless to Tempco Connect that is plugged into the wall socket at Yali Comfort and Milo (not Kaba).

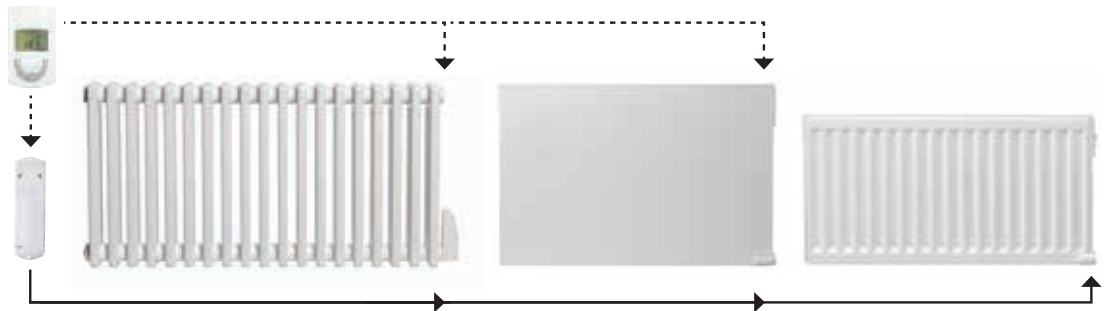

3. CONTROL WITH GSM AND CLOCK


The clock controls the zones according to their schedules (in the simplest case, all the radiators in all zones set to comfort mode). Unless GSM module sends a signal to all the radiators to be in reduced mode.

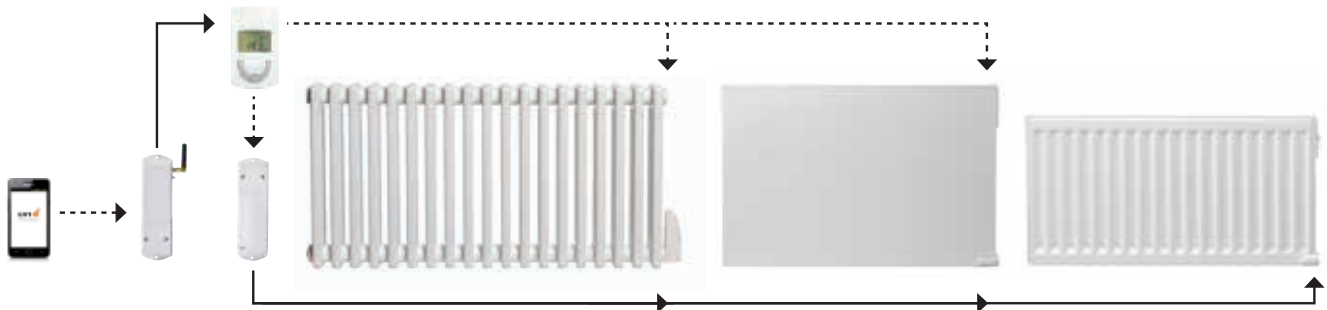

4. CONTROL WITH WIRELESS TOUCH SCREEN (WiFi)

Wireless control of operation modes and temperature via the touchscreen (WiFi) or web browser. Collect data (consumption).

Wireless directly to Yali Digital, Parada and Ramo. You activate the temperature control, described in paragraph 3, via GSM.

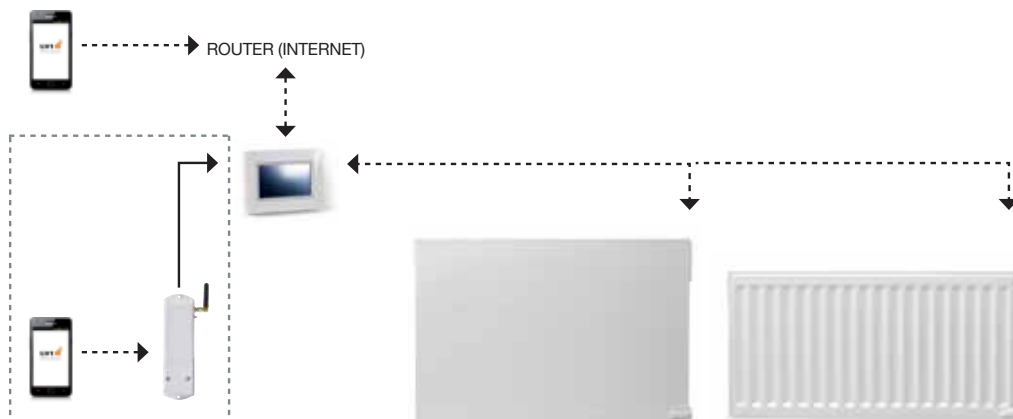

SAN Electro Heat a/s

Gillelejevej 30b - DK-3230 Græsted - Denmark

Tel.: +45 48 39 88 88 - Fax: +45 48 39 88 98 - info@san-as.com - www.san-as.com

CVR No.: 42 16 59 13



EPOK H - Decorative Radiator

The retro design of the Epok H makes it perfect for both contemporary and traditional interiors. It also disguises the very latest in heating technology, including wireless temperature regulation from the wall-mounted control box for easy access and for control of one or more radiators in the same room. The columns increase this radiator's surface area, maximising its radiation capacity

TECHNICAL DATA

- Electric, liquid-filled column radiator.
- Laser-welded steel.
- The radiator columns are 50 mm wide.
- Hard-wearing white epoxy paint (White RAL 9016).
- Quiet, odour-free and non-allergenic.

THERMOSTAT

- Electronic thermostat with digital display. Wireless and programmable in six fixed positions (auto, comfort, temperature reduction, temperature regulation, frost protection and stop) with wall-mounted thermostat. You can control one or more Yali GV, Langila, Sanbe, Epok and Tamari radiators in the same room with just one remote control.

PACKAGE


- Wall mounts with and without brackets



Wall-mounted electronic thermostat (wireless) with a digital display

HEIGHT 500 MM

Part no.	Power W	Height mm	Length mm	Voltage	Weight
8555280	500	500	600	230	21
8555281	500	500	600	400	21
8555282	750	500	800	230	29
8555283	750	500	800	400	29
8555284	1000	500	1000	230	39
8555285	1000	500	1000	400	39
8555286	1250	500	1300	230	49
8555287	1250	500	1300	400	49

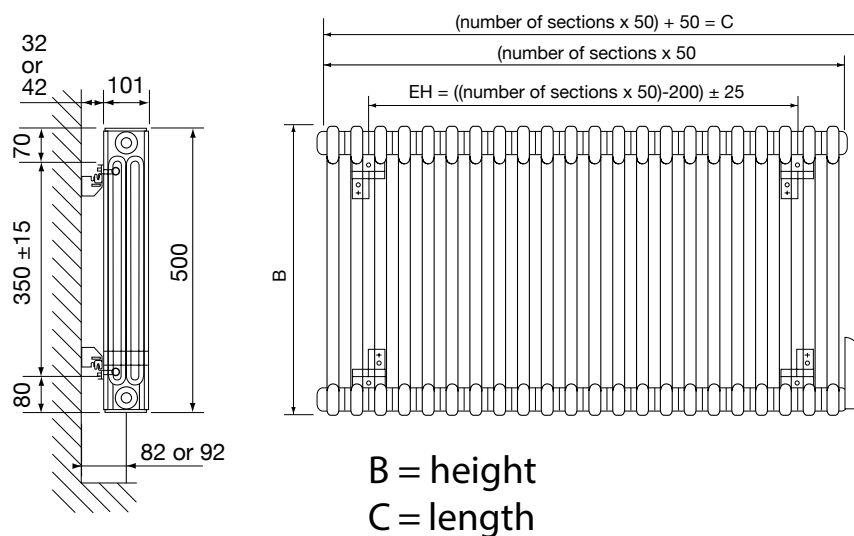

SAN Electro Heat a/s

Gillelejevej 30b - DK-3230 Græsted - Denmark

Tel.: +45 48 39 88 88 - Fax: +45 48 39 88 98 - info@san-as.com - www.san-as.com

CVR No.: 42 16 59 13



EPOK V - Decorative Radiator

The retro design of the Epok V makes it perfect for both contemporary and traditional interiors. It also disguises the very latest in heating technology, including wireless temperature regulation from the wall-hung control box for easy access and for control of one or more radiators in the same room. The columns increase this radiator's surface area, maximising its radiation capacity.

TECHNICAL DATA

- Electric, liquid-filled column radiator.
- Laser-welded steel.
- The radiator columns are 50 mm wide.
- Hard-wearing white epoxy paint (White RAL 9016).
- Quiet, odour-free and non-allergenic.

THERMOSTAT

- Electronic thermostat with digital display. Wireless and programmable in six fixed positions (auto, comfort, temperature reduction, temperature regulation, frost protection and stop) with wall-mounted thermostat. You can control one or more Yali GV, Langila, Sanbe, Epok and Tamari radiators in the same room with just one remote control.

PACKAGE

- Wall mounts with and without brackets.




Wall-mounted electronic thermostat (wireless) with a digital display.

HEIGHT 1845 MM

Part no.	Power W	Width mm	Height mm	Voltage	Weight
8555290	1000	400	1845	230	38
8555291	1000	400	1845	400	38
8555292	1500	600	1845	230	57
8555293	1500	600	1845	400	57
8555294	2000	800	1845	230	75
8555295	2000	800	1845	400	75



2 FINS

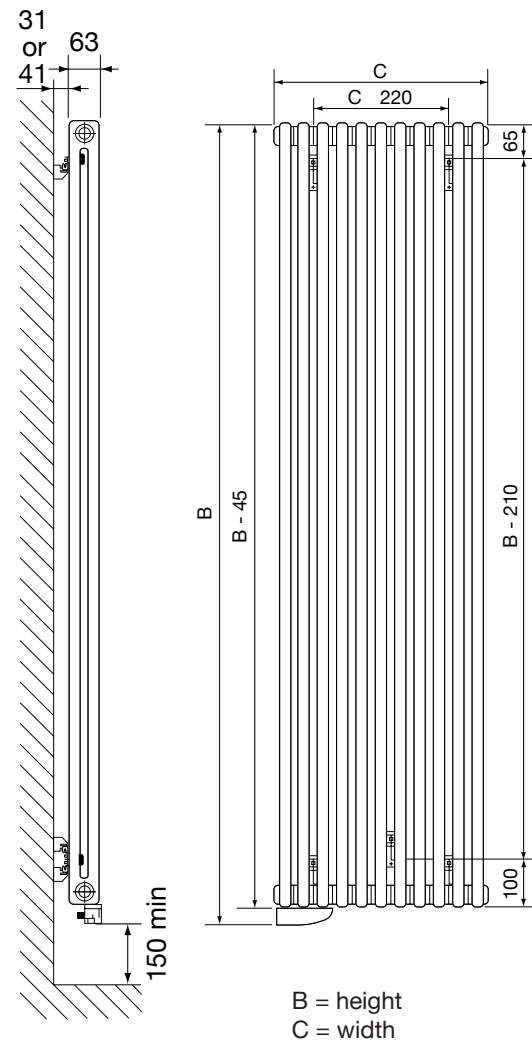

SAN Electro Heat a/s

Gillelejevej 30b - DK-3230 Græsted - Denmark

Tel.: +45 48 39 88 88 - Fax: +45 48 39 88 98 - info@san-as.com - www.san-as.com

CVR No.: 42 16 59 13



Tamari H - Dekorativ Radiator

The clean, sharp lines of the Tamari H produce a tangible sense of strength and beauty. This is a radiator that makes a bold visual impression without being fussy or overly ornate. The Tamari H is equipped with a wall-mounted wireless thermostat, which can control one or more radiators in several rooms using a single remote control.

TECHNICAL DATA

- Electric, liquid-filled radiator.
- Made from strong steel of the highest quality. Flat sections.
- Hard-wearing white epoxy paint (White RAL 9016).
- Quiet, odour-free and non-allergenic

THERMOSTAT

- Electronic thermostat with digital display. Wireless and programmable in six fixed positions (auto, comfort, temperature reduction, temperature regulation, frost protection and stop) with wall-mounted thermostat. You can control one or more Yali GV, Langila, Sanbe, Epok and Tamari radiators in the same room with just one remote control.

ACCESSORIES

- Splash proof cover for an upgrade to IP44

PACKAGE

- Wall mounts with and without brackets.




Wall-mounted electronic thermostat (wireless) with a digital display.

HEIGHT 500 MM

Part no.	Power W	Height mm	Length mm	Voltage	Weight
8555306	500	500	558	230	19
8555307	500	500	558	400	19
8555308	750	500	783	230	27
8555309	750	500	783	400	27
8555310	1000	500	1083	230	38
8555311	1000	500	1083	400	38
8555312	1250	500	1308	230	46
8555313	1250	500	1308	400	46



Splash proof cover for
IP44

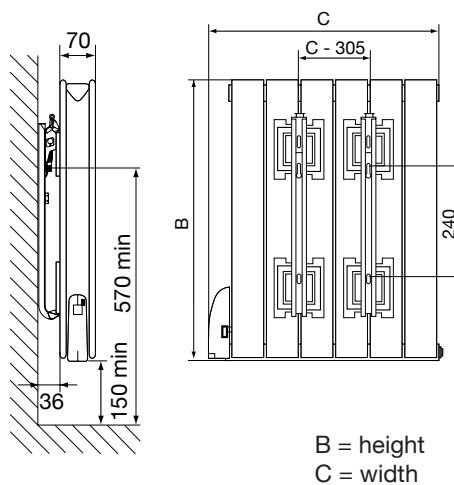

SAN Electro Heat a/s

Gillelejevej 30b - DK-3230 Græsted - Denmark

Tel.: +45 48 39 88 88 - Fax: +45 48 39 88 98 - info@san-as.com - www.san-as.com

CVR No.: 42 16 59 13



Tamari V - Decorative Radiator

Tamari in a vertical version is a real space saver with widths as small as 455 mm. The clean, sharp lines of the Tamari V produce a tangible sense of strength and beauty. This is a radiator that makes a bold visual impression without being fussy or overly ornate. The Tamari H is equipped with a wall-mounted wireless thermostat, which can control one or more radiators in several rooms using a single remote control.

TECHNICAL DATA

- Electric, liquid-filled radiator.
- Made from strong steel of the highest quality. Flat sections.
- Hard-wearing white epoxy paint (White RAL 9016).
- Quiet, odour-free and non-allergenic

THERMOSTAT

- Electronic thermostat with digital display. Wireless and programmable in six fixed positions (auto, comfort, temperature reduction, temperature regulation, frost protection and stop) with wall-mounted thermostat. You can control one or more Yali GV, Langila, Sanbe, Epok and Tamari radiators in the same room with just one remote control.

ACCESSORIES

- Splash proof cover for an upgrade to IP44.

PACKAGE

- Wall mounts with and without brackets.




Wall-mounted electronic thermostat (wireless) with a digital display.

HEIGHT 1830 MM

Part no.	Power W	Width mm	Height mm	Voltage	Weight
8555300	1000	455	1830	230	33
8555301	1000	455	1830	400	33
8555302	1500	680	1830	230	46
8555303	1500	680	1830	400	46
8555304	2000	905	1830	230	58
8555305	2000	905	1830	400	58



Splash proof cover for IP44.

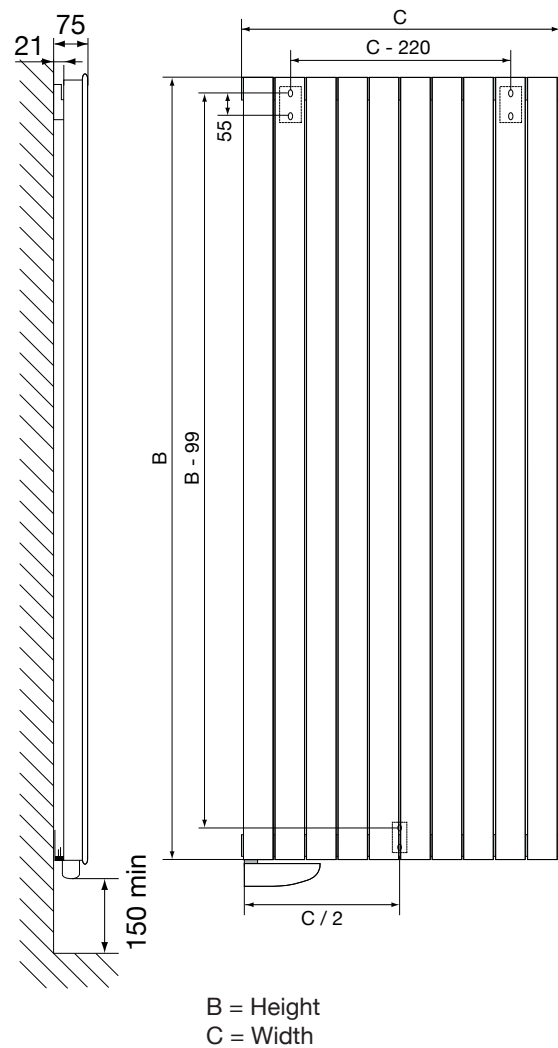



Langila - Decorative Radiator

Langila's clean, sharp lines give a tangible aesthetic and attractive feel. With an elegant front panel containing the very state of the art in heating technology, Langila makes a big impression in any home, without being ostentatious. Langila has straight lines, perfectly reflecting its bold form.

TECHNICAL DATA

- Oil-filled radiator with vegetable oil.
- Made from strong steel of the highest quality.
- Hard-wearing white epoxy paint (White RAL 9016).
- Quiet, odour-free and non-allergenic.

THERMOSTAT

- Electronic thermostat with digital display. Wireless and programmable in six fixed positions (auto, comfort, temperature reduction, temperature regulation, frost protection and stop) with wall-mounted thermostat. You can control one or more Yali GV, Langila, Sanbe, Epok and Tamari radiators in the same room with just one remote control.
- Splash proof cover for an upgrade to IP44.

ACCESSORIES

- Towel rail in stainless steel available as an accessory.

PACKAGE

- Wall mounts with and without brackets



Wall-mounted electronic thermostat (wireless) with a digital display.

HEIGHT 1800 MM

Part no.	Power W	Width mm	Height mm	Voltage	Weight
8558740	750	325	1800	230	29
8558741	750	325	1800	400	29
8558742	1000	475	1800	230	40
8558743	1000	475	1800	400	40
8558744	1250	625	1800	230	52
8558745	1250	625	1800	400	52

HEIGHT 1950 MM

Part no.	Power W	Width mm	Height mm	Voltage	Weight
8558758	1500	625	1950	230	57
8558759	1500	625	1950	400	57

HEIGHT 2100 MM

Part no.	Power W	Width mm	Height mm	Voltage	Weight
8558760	1750	625	2100	230	62
8558761	1750	625	2100	400	62
8558762	2000	775	2100	230	75
8558763	2000	775	2100	400	75

LANGILA + TOWEL RAIL

Part no.	Width mm	Height mm	Colour	Description
9412232	365	40	Stainless	For Langila width 325mm
9412233	515	40	Stainless	For Langila width 475mm
9412234	665	40	Stainless	For Langila width 625mm
9412013	815	40	Stainless	For Langila width 775mm

ADD SOME COLOUR


Langila is available in white RAL 9016 as standard, but also in 12 different metallic, anodic and mat colours.

ADDITIONAL PRICE +20%.

Contact us for additional information



Towel rail for Langila.

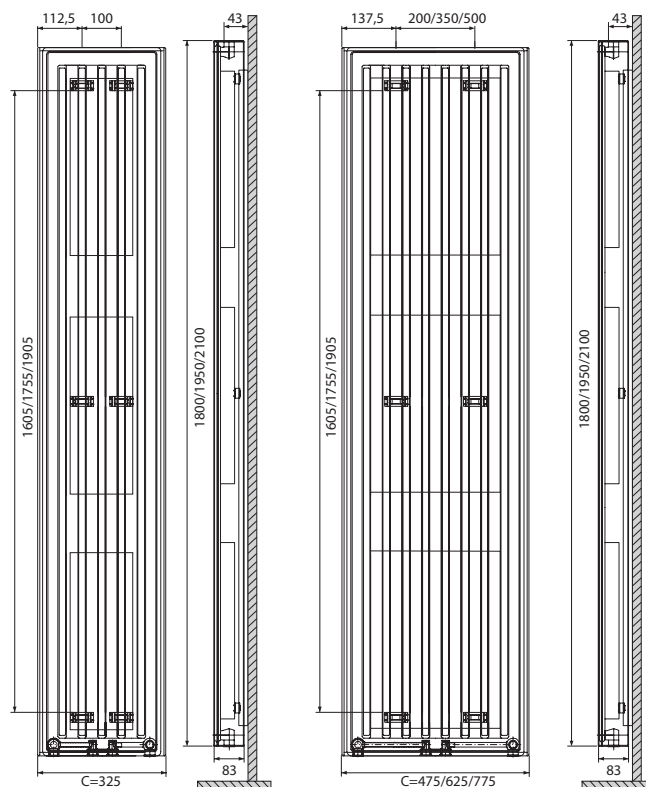

SAN Electro Heat a/s

Gillelejevej 30b - DK-3230 Græsted - Denmark

Tel.: +45 48 39 88 88 - Fax: +45 48 39 88 98 - info@san-as.com - www.san-as.com

CVR No.: 42 16 59 13



Sanbe - Decorative Radiator

Sanbes modern, clean lines and subtle curves bring a dash of style to any room, whether classic or modern. Its elegant front panel perfectly conceals advanced heating technology. Sanbe has rounded sides and radiates a pleasant warmth – you can rest assured that your home will feel comfortable!

TECHNICAL DATA

- Oil-filled radiator with vegetable oil.
- Made from strong steel of the highest quality.
- Hard-wearing white epoxy paint (White RAL 9016).
- Quiet, odour-free and non-allergenic

THERMOSTAT

- Electronic thermostat with digital display. Wireless and programmable in six fixed positions (auto, comfort, temperature reduction, temperature regulation, frost protection and stop) with wall-mounted thermostat. You can control one or more Yali GV, Langila, Sanbe, Epok and Tamari radiators in the same room with just one remote control.

ACCESSORIES

- Splash proof cover for an upgrade to IP44.
- Towel rail in stainless steel available as an accessory.

PACKAGE

- Wall mounts with and without brackets.



Wall-mounted electronic thermostat (wireless) with a digital display.

HEIGHT 1800 MM

Part no.	Power W	Width mm	Height mm	Voltage	Weight
8558746	750	380	1800	230	29
8558747	750	380	1800	400	29
8558748	1000	530	1800	230	40
8558749	1000	530	1800	400	40
8558750	1250	680	1800	230	52
8558751	1250	680	1800	400	52

HEIGHT 1950 MM

Part no.	Power W	Width mm	Height mm	Voltage	Weight
8558764	1500	680	1950	230	57
8558765	1500	680	1950	400	57

HEIGHT 2100 MM

Part no.	Power W	Width mm	Height mm	Voltage	Weight
8558766	1750	680	2100	230	62
8558767	1750	680	2100	400	62
8558768	2000	830	2100	230	75
8558769	2000	830	2100	400	75

SANBE + TOWEL RAIL

Part no.	Width mm	Height mm	Colour	Description
9412235	412,5	40	Stainless	For Sanbe width 380mm
9412236	562,5	40	Stainless	For Sanbe width 530mm
9412237	712,5	40	Stainless	For Sanbe width 680mm
9412014	862,5	40	Stainless	For Sanbe width 830mm

ADD SOME COLOUR


Langila is available in white RAL 9016 as standard, but also in 12 different metallic, anodic and mat colours.

ADDITIONAL PRICE +20%.

Contact us for additional information.



Towel rail for Sanbe.

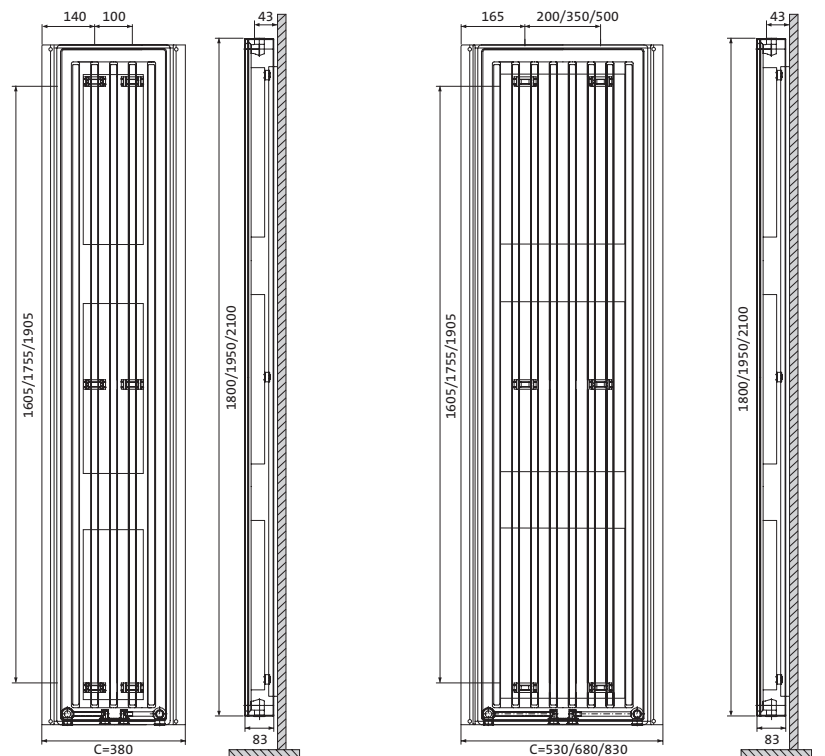


SAN Electro Heat a/s

Gillelejevej 30b - DK-3230 Græsted - Denmark

Tel.: +45 48 39 88 88 - Fax: +45 48 39 88 98 - info@san-as.com - www.san-as.com

CVR No.: 42 16 59 13

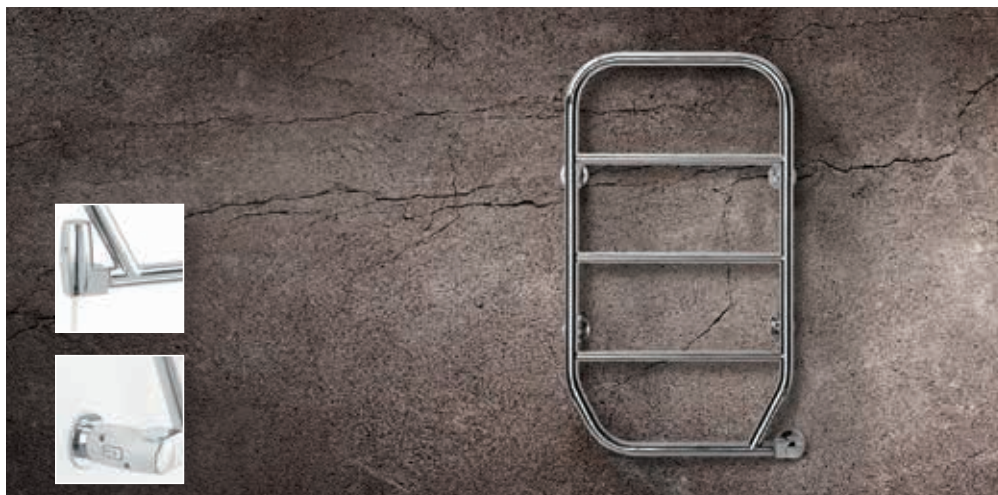

Nila - Towel Warmer

The Nila has a classic design that makes it suitable for any interior. Available in a chrome or white finish, its rounded corners and rails create an impression of softness. The Nila comes with a concealed or visible cable connector, giving it the flexibility to blend perfectly into your kitchen or bathroom. Connection points are available on the bottom left- or right-hand sides of the unit. Nila R with its adjustable temperature control you can always find the ideal temperature. Another version, the Nila, features a simple on/off switch in place of the adjustable temperature control. Nila Ti comes with a timer, 2-8 hours or constantly on/off.

TECHNICAL DATA

- Liquid-filled towel warmer
- Strong steel of the highest quality.
- Quiet and odour-free.
- Easy to install.
- Low energy consumption (70-100 W).
- Available in two widths: 45 and 62 cm.
- Choose between white RAL 9016 and chrome finish.
- Max. surface temperature 60°C

THERMOSTAT

- Two-pole on/off switch .
- Choose between concealed and visible connection.
- The connection housing can be located at the bottom to the right or left during installation.
- Fixed mounting.
- Nila: Two-pole on/off switch
- Nila R: Adjustable temperature control
- NilaTi: Timer (2-8 hours) or constantly on/off

PACKAGE

- Supplied with attached 1.5 m connection cable with plug and the necessary screws for installation.
- Can be installed with concealed connection, cover supplied

ACCESSORIES

- Drying shelf THC is available as an accessory.



NILA


Part no.	Colour	Power W	Height mm	Width mm	Voltage	Weight
9412766	Chrome	70	800	450	230	6
9412767	White	80	800	450	230	6
9412768	Chrome	80	800	620	230	7
9412769	White	100	800	620	230	7

NILA R

Part no.	Colour	Power W	Height mm	Width mm	Voltage	Weight
9412760	Chrome	70	800	450	230	6
9412761	White	80	800	450	230	6
9412762	Chrome	80	800	620	230	7
9412763	White	100	800	620	230	7

NILA TI

Part no.	Colour	Power W	Height mm	Width mm	Voltage	Weight
9412226	Chrome	70	800	450	230	6
9412227	White	80	800	450	230	6
9412228	Chrome	80	800	620	230	7
9412229	White	100	800	620	230	7

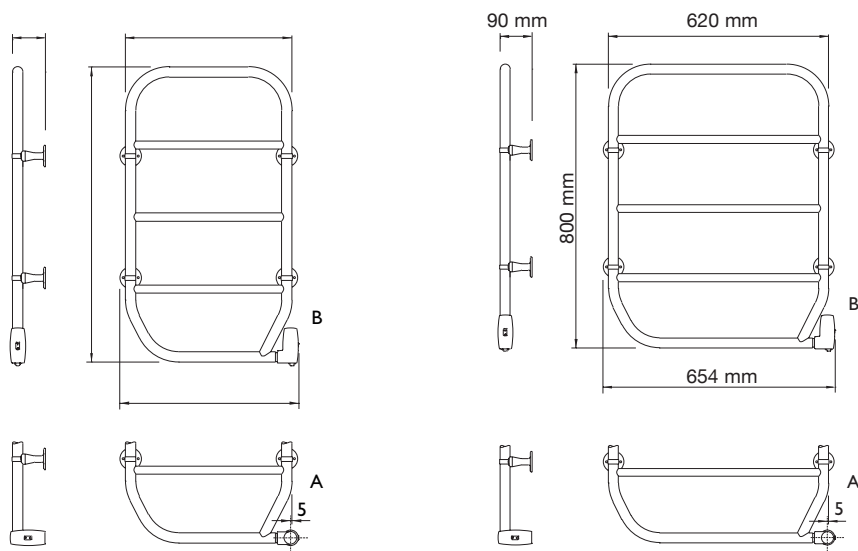

• Nila | Nila R | Nila Ti



Chrome



White RAL 9016

SAN Electro Heat a/s

Gillelejevej 30b - DK-3230 Graested - Denmark

Tel.: +45 48 39 88 88 - Fax: +45 48 39 88 98 - info@san-as.com - www.san-as.com

CVR No.: 42 16 59 13



Muria - Towel Warmer

The sinuous coils of the Muria intrigue the eye, creating instant visual drama in your bathroom and plenty of hanging space for towels. It is perfect for confined spaces, as it is cleverly designed to turn 180-degrees on your wall. It is available in a chrome or white RAL 9016. Muria R has an adjustable temperature control, so you can always find the ideal temperature. Another version, the Muria, features a simple on/off switch in place of the adjustable temperature control. Muria Ti comes with a timer, 2-8 hours or constantly on/off.

TECHNICAL DATA


- Liquid-filled towel warmer
- Strong steel of the highest quality.
- Reinforced hinges.
- Quiet and odour-free.
- Easy to install.
- Very low energy consumption (70 W).
- Choose between white RAL 9016 and chrome finish.
- Max. surface temperature 60°C

THERMOSTAT

- Two-pole on/off switch .
- The connection housing can be located at the bottom to the right or left during installation.
- Nila: Two-pole on/off switch
- Nila R: Adjustable temperature control
- NilaTi: Timer (2-8 hours) or constantly on/off.

PACKAGE

- Supplied with attached 1.5 m connection cable with plug and the necessary screws for installation.

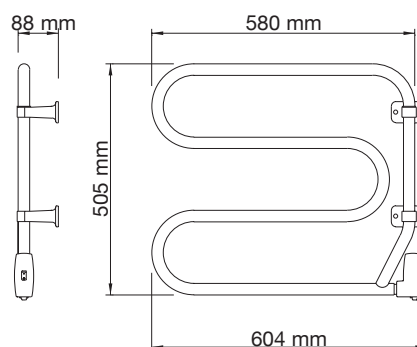

Muria - Muria R - Muria Ti

MURIA

Part no.	Colour	Power W	Height mm	Width mm	Voltage	Weight
9412771	White	70	505	580	230	5
9412770	Chrome	70	505	580	230	5

MURIA R

Part no.	Colour	Power W	Height mm	Width mm	Voltage	Weight
9412765	White	70	505	580	230	5
9412764	Chrome	70	505	580	230	5

MURIA TI

Part no.	Colour	Power W	Height mm	Width	Voltage	Weight
9412231	White	70	505	580	230	5
9412230	Chrome	70	505	580	230	5



Chrome



White RAL 9016

SAN Electro Heat a/s

Gillelejevej 30b - DK-3230 Graested - Denmark

Tel.: +45 48 39 88 88 - Fax: +45 48 39 88 98 - info@san-as.com - www.san-as.com

CVR No.: 42 16 59 13



Athena A - Towel Warmer

If you like bold, geometric shapes choose the Athena A. Its contrasting curves and right angles create an eye-catching effect, with no compromise on space. The Athena A towel warmer is packed with choices. It is reversible and give you the option of installing the units face-up or -down, left or right. The concealed connection point allows you to link the units directly to the mains power supply to achieve a totally seamless effect or to use the supplied cord and plug for connection to a power point. A simple flick of a switch is all you need to operate the Athena A.

TECHNICAL DATA


- Electric towel warmer
- Strong steel of the highest quality.
- Quiet and odour-free.
- Easy to install.
- Very low energy consumption (40-55 W).
- Choose between white RAL 9016 and chrome finish.
- Reversible
- Double-insulated
- Max. surface temperature 60°C

THERMOSTAT

- Two-pole on/off switch .
- Easy to install. During installation, choose whether you want the switch at the top or bottom.
- Choose between concealed and visible connection (sold with male contact).
- Towel warmer with heater cable for fixed installation, with 2-pole illuminated switch and concealed screw holes.
- Can be installed with concealed connection and with the connection housing at the top or bottom and on the right or left hand side.

PACKAGE


- Supplied with attached 1.5 m connection cable with plug and the necessary screws for installation.

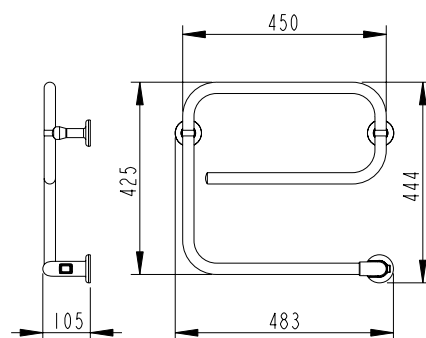

Athena A

ATHENA A

Part no.	Colour	Power W	Height mm	Width mm	Voltage	Weight
9412580	Chrome	40	425	450	230	2
9412581	White	55	425	450	230	2

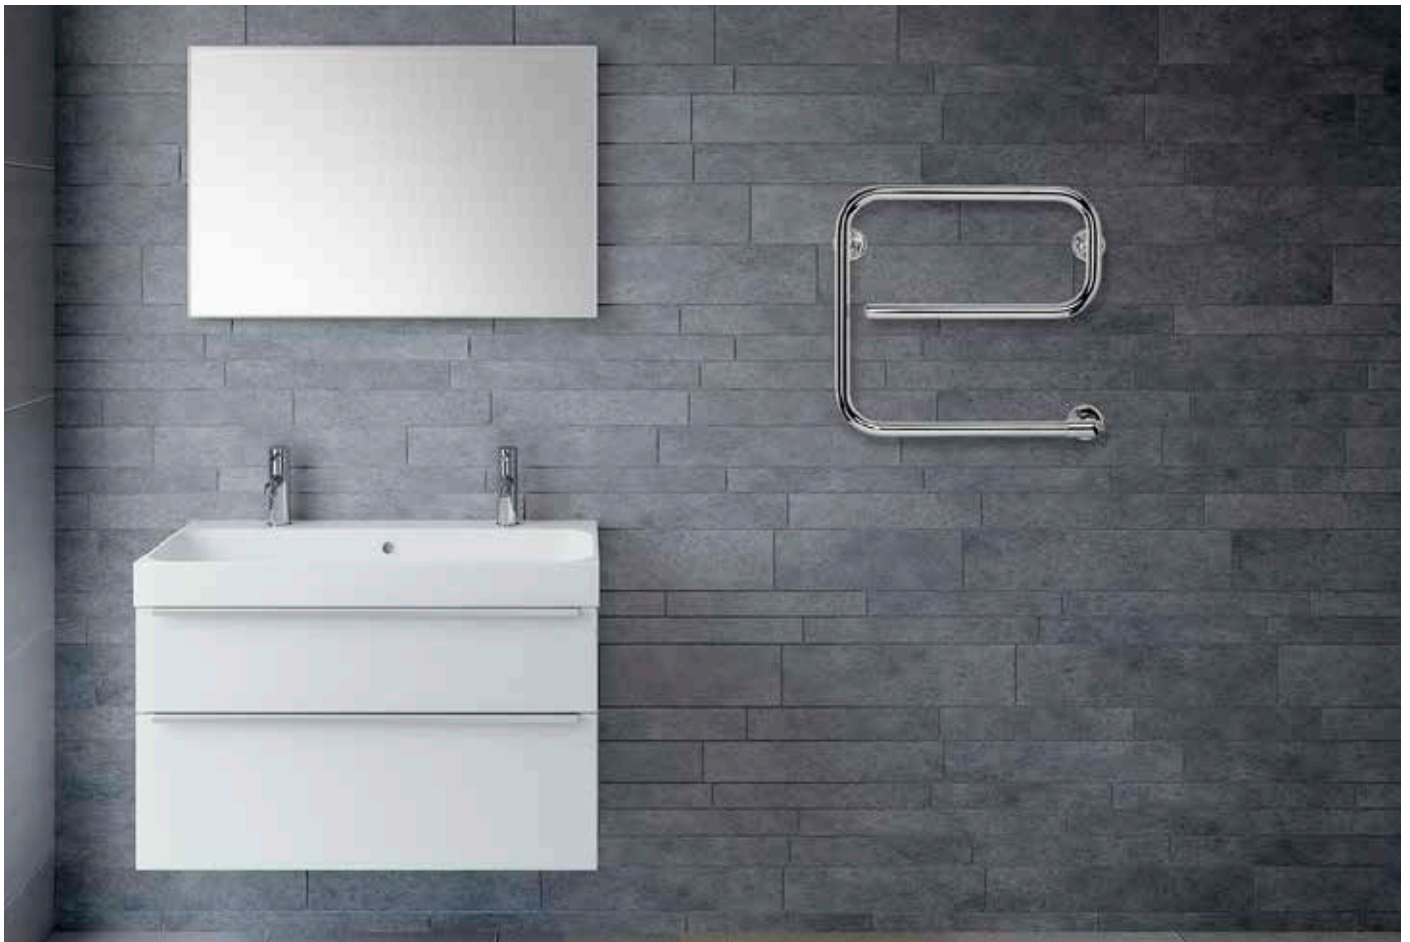


SAN Electro Heat a/s

Gillelejevej 30b - DK-3230 Graested - Denmark

Tel.: +45 48 39 88 88 - Fax: +45 48 39 88 98 - info@san-as.com - www.san-as.com

CVR No.: 42 16 59 13

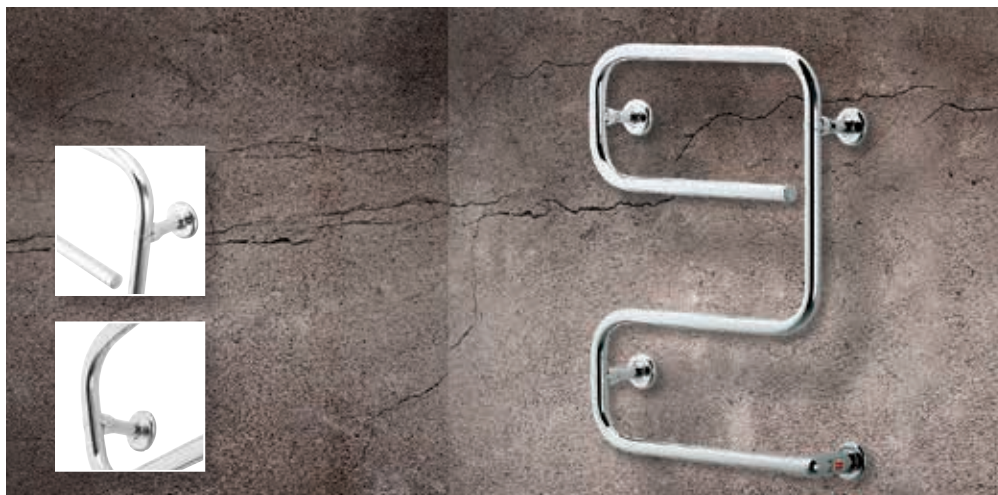

Athena E - Towel Warmer

If you like bold, geometric shapes choose the Athena E. Its contrasting curves and right angles create an eye-catching effect, with no compromise on space. The Athena E towel warmer is packed with choices. It is reversible and give you the option of installing the units face-up or -down, left or right. The concealed connection point allows you to link the units directly to the mains power supply to achieve a totally seamless effect or to use the supplied cord and plug for connection to a power point. A simple flick of a switch is all you need to operate the Athena E. The Athena E is slightly smaller than Athena S and larger than the Athena A

TECHNICAL DATA


- Electric towel warmer
- Strong steel of the highest quality.
- Quiet and odour-free.
- Easy to install.
- Very low energy consumption (55-70 W).
- Choose between white RAL 9016 and chrome finish.
- Reversible
- Double-insulated
- Max. surface temperature 60°C

THERMOSTAT

- Two-pole on/off switch .
- Easy to install. During installation, choose whether you want the switch at the top or bottom.
- Choose between concealed and visible connection (sold with male contact).
- Towel warmer with heater cable for fixed installation, with 2-pole illuminated switch and concealed screw holes.
- Can be installed with concealed connection and with the connection housing at the top or bottom and on the right or left hand side.

PACKAGE

- Supplied with attached 1.5 m connection cable with plug and the necessary screws for installation.

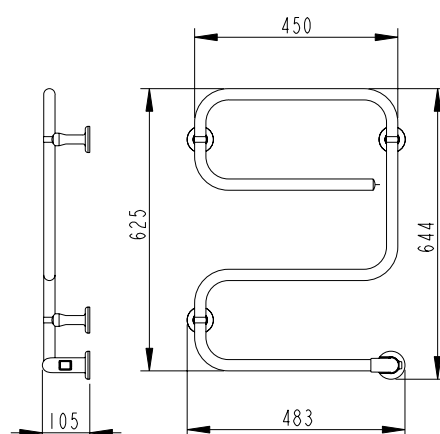

Athena E

ATHENA E

Part no.	Colour	Power W	Height mm	Width mm	Voltage	Weight
9412582	Chrome	55	625	450	230	3
9412583	White	70	625	450	230	3



SAN Electro Heat a/s

Gillelejevej 30b - DK-3230 Graested - Denmark

Tel.: +45 48 39 88 88 - Fax: +45 48 39 88 98 - info@san-as.com - www.san-as.com

CVR No.: 42 16 59 13



Athena S - Towel Warmer

The looping curves of the Athena S echo the lazy winding of a river to the sea, creating a sense of calm in your bathroom. It will rapidly become indispensable, both as part of your bathroom décor and for practical reasons, as its curves can hold plenty of towels. The Athena S is reversible and can be installed facing upwards or downwards. For a smooth, clean look, take advantage of the unit's concealed connection point by linking it directly to the mains electrics or simply connect to a power point with the supplied cord and plug. The Athena S comes with an easy-to-use on/off flick switch.

TECHNICAL DATA


- Electric towel warmer
- Strong steel of the highest quality.
- Quiet and odour-free.
- Easy to install.
- Very low energy consumption (50-65 W).
- Choose between white RAL 9016 and chrome finish.
- Reversible
- Double-insulated
- Max. surface temperature 60°C.

THERMOSTAT

- Two-pole on/off switch .
- Easy to install. During installation, choose whether you want the switch at the top or bottom.
- Choose between concealed and visible connection (sold with male contact).
- Towel warmer with heater cable for fixed installation, with 2-pole illuminated switch and concealed screw holes.
- Can be installed with concealed connection and with the connection housing at the top or bottom and on the right or left hand side.

PACKAGE

- Supplied with attached 1.5 m connection cable with plug and the necessary screws for installation.

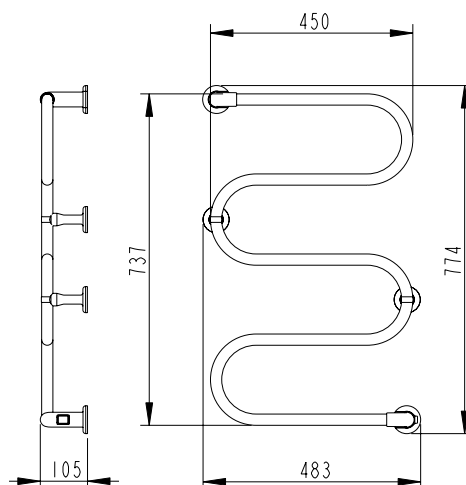

Athena S

ATHENA S

Part no.	Colour	Power W	Height mm	Width mm	Voltage	Weight
9412584	Chrome	50	737	450	230	3
9412585	White	65	737	450	230	3




SAN Electro Heat a/s

Gillelejevej 30b - DK-3230 Graested - Denmark

Tel.: +45 48 39 88 88 - Fax: +45 48 39 88 98 - info@san-as.com - www.san-as.com

CVR No.: 42 16 59 13

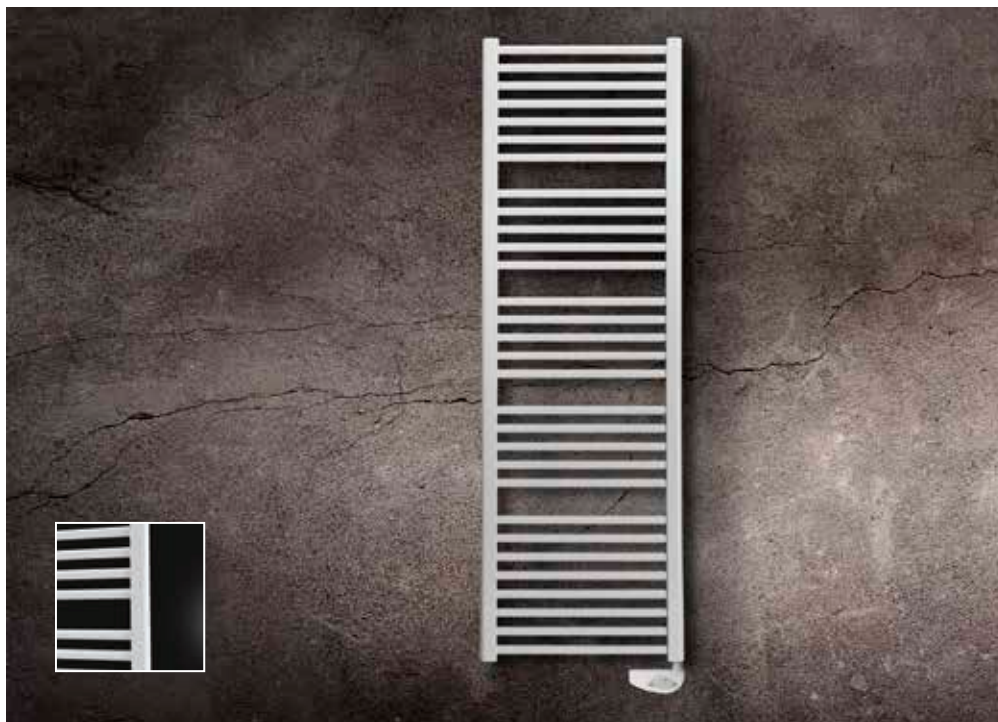

Jarl - Towel Warmer

Any bathroom or kitchen that gets a lot of use will generate plenty of wet towels. That's why the Jarl is the perfect heating solution for these areas. This smart design functions both as a radiator and towel warmer, with a generous number of rails to ensure that no matter how many towels you use, you'll always have a dry one to hand. The Jarl comes with a built in timer that allows you to set it to dry at full power over a twohour period everyday or manually as needed. It's a perfect solution for busy bathrooms.

TECHNICAL DATA


- Electric, liquid-filled towel warmer/bathroom radiator.
- Hard-wearing epoxy paint (White RAL 9016).
- Straight side channels. D-shaped vertical pipes
- Easy to install

THERMOSTAT

- Jarl is equipped with an electronic thermostat, which can be set in the following positions: Frost protection 7°C. ECO. Lowest temperature 16°C (frost protection off). Temperature 18°C - 24°C. Full output.
- Timer with 2 hr boost (or manual if required).
- Only for mounting with thermostat on the right hand side and connection with visible cable.

PACKAGE

- Supplied with attached 90 cm connection cable and the necessary screws/mounts for installation.

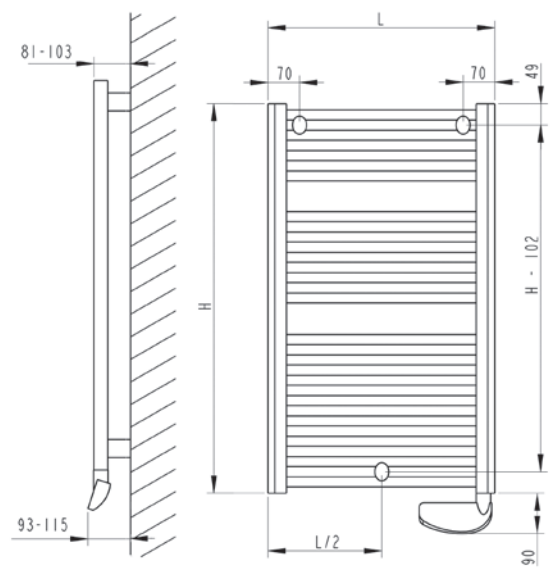

JARL

Part no.	Colour	Power W	Height mm	Width mm	Voltage	Weight
9412510	White	300	953	500	230	12
9412511	White	500	1313	500	230	17
9412512	White	750	1628	600	230	24

Part no.	Height mm	Height incl. thermostat housing mm
9412510	863	963
9412511	1222	1313
9412512	1538	1628



SAN Electro Heat a/s

Gillelejevej 30b - DK-3230 Graested - Denmark

Tel.: +45 48 39 88 88 - Fax: +45 48 39 88 98 - info@san-as.com - www.san-as.com

CVR No.: 42 16 59 13



Alaid - Towel Warmer

The chrome plated Alaid IR has a rounded, tubular design that offers a large surface area in a compact package with a thoroughly modern appearance. This makes it the perfect choice for bathrooms or kitchens that need a slightly unusual touch. Its infrared thermostat can be manually operated and wall-mounted for easy access and comes with an inbuilt timer that can be set to full power twice daily for those periods when your bathroom is busiest. Also available is the Alaid, which comes with an electronic thermostat and is finished in white RAL 9016 and the Alaid X, which can generate heat both electrically and hydronically.

TECHNICAL DATA

- Electric, liquid-filled towel warmer/bathroom radiator.
- Quiet and odour-free.
- Choose between white RAL 9016 and chrome finish.
- Easy to install
- Max. surface temperature 60°C.

THERMOSTAT

- Alaid is equipped with an electronic thermostat, which can be set in the following positions: Frost protection 7°C. ECO. Lowest temperature 16°C (frost protection off). Temperature 18°C - 24°C. Full output.
- Timer with 2 hr boost (also set manually).
- Only for mounting with thermostat on the right hand side and connection with visible cable.
- Alaid is equipped with an electronic, wall-mounted thermostat with adjustable IR control.

PACKAGE

- Supplied with attached 90 cm connection cable and the necessary screws/mounts for installation. The Alaid X is also supplied with a complete valve assembly for connection to water (the valve can be switched between 1-pipe and 2-pipe systems).
- The valve assembly on the left hand side is reversible. The electric thermostat is located on the right side (not reversible).



- Electronic, wall-mounted thermostat with adjustable IR control (Alaid IR)
- Knob for temperature regulation 5-30°C
- Timer for programming providing full power for two hours twice daily, or manual if required.

ALAUD

Part no.	Colour	Power W	Height mm	Width mm	Voltage	Weight
9412521	White	300	953	500	230	9
9412521	White	500	1313	500	230	13

ALAUD IR

Part no.	Colour	Power W	Height mm	Width mm	Voltage	Weight
9412586	Chrome	300	1342	500	230	13
9412587	Chrome	500	1657	600	230	19

ALAUD X

Part no.	Colour	Power W	Height mm	Width mm	Voltage	Weight
9412524	White	300	953	500	230	9
9412525	White	500	1313	500	230	13




• Alaud



• Alaud IR



• Alaud X

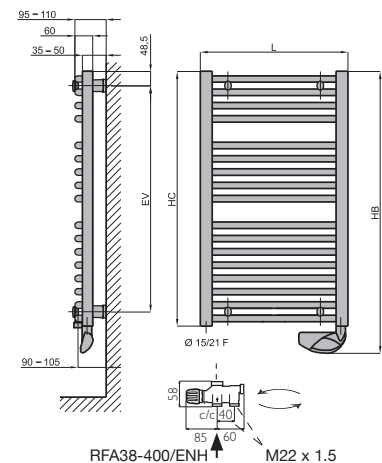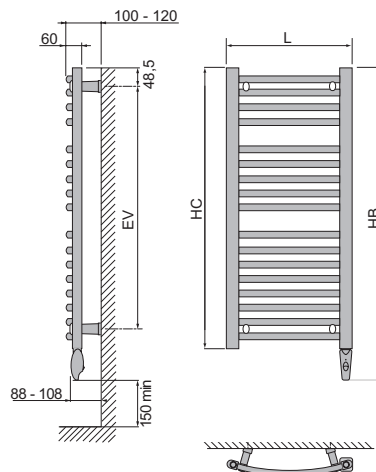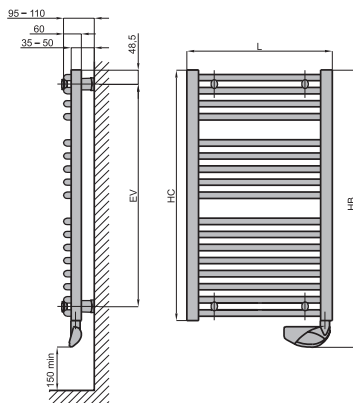

Part no.	Height mm	Height incl. thermostat housing mm
9412521	862	953
9412522	1222	1313

Part no.	Height mm	Height incl. thermostat housing mm
9412586	1222	1342
9412587	1537	1657


Part no.	Height mm	Height incl. thermostat housing mm
9412524	862	953
9412525	1222	1313

SAN Electro Heat a/s

Gillelejevej 30b - DK-3230 Græsted - Denmark

Tel.: +45 48 39 88 88 - Fax: +45 48 39 88 98 - info@san-as.com - www.san-as.com

CVR No.: 42 16 59 13

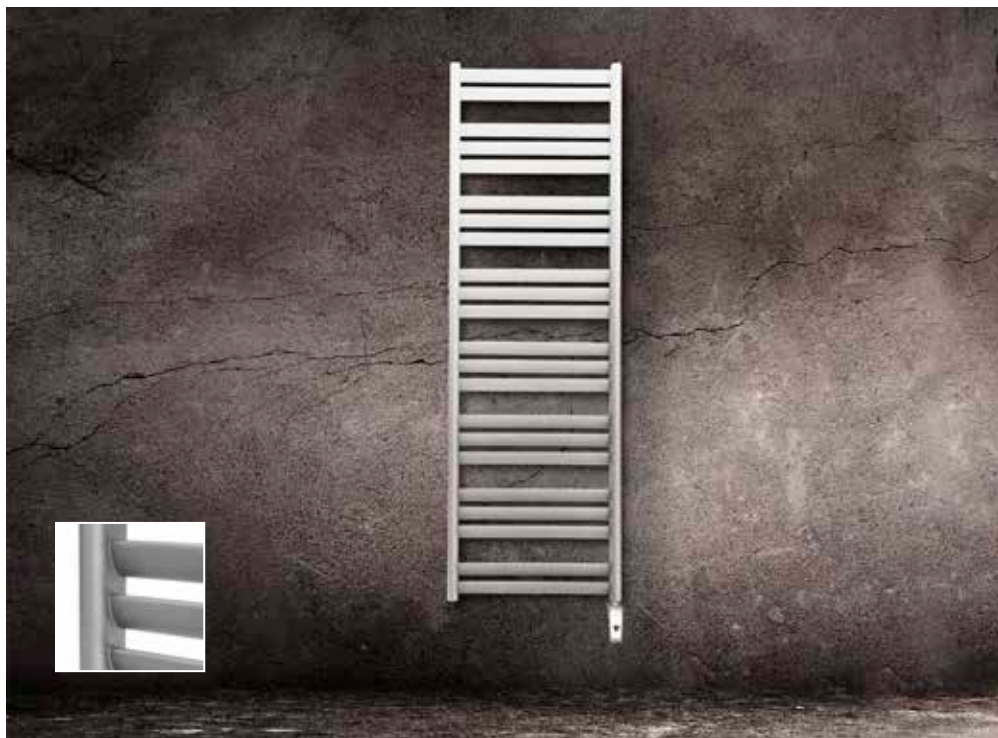

Bandai - Towel Warmer

The slender heating elements of the Bandai IR makes it an elegant addition to any bathroom or kitchen, whether you choose the standard silver gloss finish or one of the range of 18 colour finishes available. The separate thermostat controls the temperature with infrared signals, so it can be wall-mounted for easy access. The thermostat can be operated manually and also comes with an inbuilt timer that can be set to full power twice daily for a two-hour period, giving you maximum drying power when your bathroom is busiest. Also available is the Bandai, which comes with an electronic thermostat and is finished in white RAL 9016.

TECHNICAL DATA

- Electric, liquid-filled towel warmer/bathroom radiator.
- Quiet and odour-free.
- Bandai IR can be ordered in any RAL colour.
- Easy to install
- Max. surface temperature 60°C.

THERMOSTAT

- Bandai is equipped with an electronic thermostat, which can be set in the following positions: Frost protection 7°C. ECO. Lowest temperature 16°C (frost protection off). Temperature 18°C - 24°C. Full output.
- Timer with 2 hr boost (also set manually).
- Only for mounting with thermostat on the right hand side and connection with visible cable.
- Bandai is equipped with an electronic, wall-mounted thermostat with adjustable IR control.

PACKAGE

- Supplied with attached 90 cm connection cable and the necessary screws/mounts for installation.



- Electronic, wall-mounted thermostat with adjustable IR control (Bandai IR)
- Knob for temperature regulation 5-30°C
- Timer for programming providing full power for two hours twice daily, or manual if required.


BANDAI

Part no.	Colour	Power W	Height mm	Width mm	Voltage	Weight
9412530	White	300	1003	400	230	12
9412531	White	400	1427	400	230	15


BANDAI IR

Part no.	Colour	Power W	Height mm	Width mm	Voltage	Weight
9412588	Silver gloss	300	1003	400	230	12
9412589	Silver gloss	400	1427	400	230	15

• Bandai

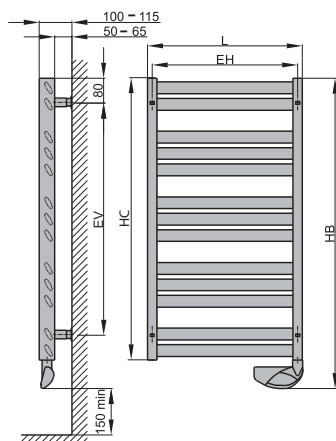


• Bandai IR

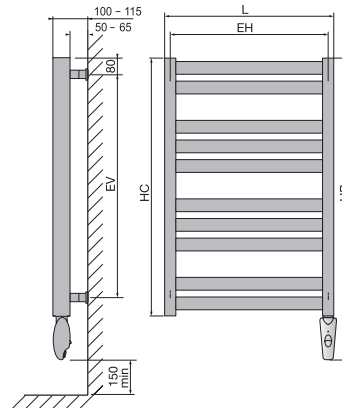

Part no.	Height mm	Height incl. thermostat housing mm
9412530	912	1003
9412531	1336	1427

Part no.	Height mm	Height incl. thermostat housing mm
9412588	912	1032
9412589	1336	1456

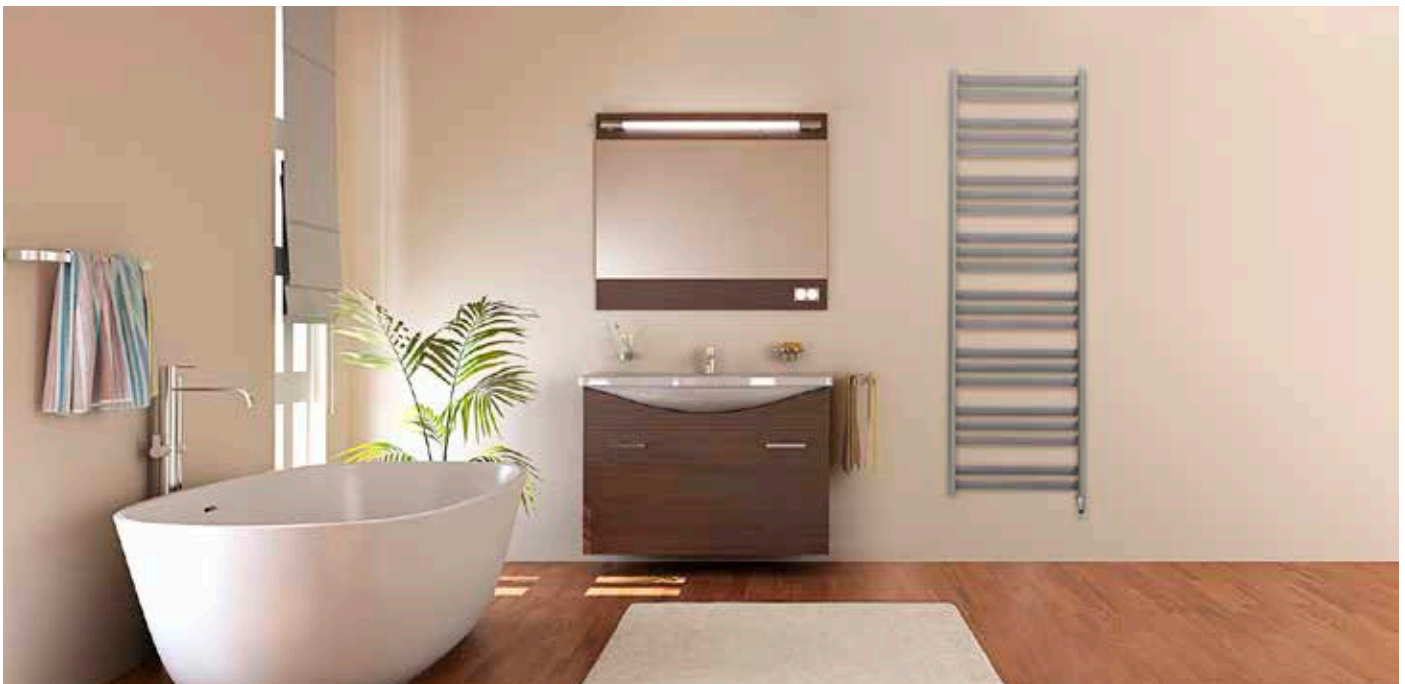

SAN Electro Heat a/s

Gillelejevej 30b - DK-3230 Græsted - Denmark

Tel.: +45 48 39 88 88 - Fax: +45 48 39 88 98 - info@san-as.com - www.san-as.com

CVR No.: 42 16 59 13



• IP 44 splash proof cover



• NILA THC



• LAN V TR



• SAN V TR



• Touch Screen (WiFi)



• Connection box

Model	Height mm	Width mm	Description
MIL TR 03 05 C	266	470	Towel rail for Milo V width 300 mm
MIL TR 03 05 W	266	470	Towel rail for Milo V width 300 mm
MIL TR 03 06 C	266	570	Towel rail for Milo V width 400 mm
MIL TR 03 06 W	266	570	Towel rail for Milo V width 400 mm
LAN V TR 03	40	365	Towel rail for Langila width 325 mm
LAN V TR 05	40	515	Towel rail for Langila width 475 mm
LAN V TR 06	40	665	Towel rail for Langila width 625 mm
LAN V TR 08	40	815	Towel rail for Langila width 775 mm
SAN V TR 03	40	412,5	Towel rail for Sanbe width 380 mm
SAN V TR 05	40	562,5	Towel rail for Sanbe width 530 mm
SAN V TR 06	40	712,5	Towel rail for Sanbe width 680 mm
SAN V TR 08	40	862,5	Towel rail for Sanbe width 830 mm
Nila TH-C	-	-	Drying shelf for Nila. Depth: 290 mm
IP 44 splash proof cover	-	-	Splash proof cover for IP44
Feet type 10	-	-	Feet for the single paneled radiator Kaba
TempCo Clock RF	130	75	Wireless 4 zone programmer
TempCo GSM NC EH	170	50	Controller
TempCo Connect 1M RF	170	70	Central clock
TempCo Connect 1M RF	170	70	Receiver with zero
TempCo E3	-	-	Wireless central controller with WiFi connectivity
Charger (TempCo Touch E3)			
Connection box			

SPECIAL COLOURS (ADDITIONAL PRICE +20 %)

	Black Textured (9305)		Creme White (1413)		Anodic Natura (0120)
	White Textured (9316)		Anodic Bronze (0320)		Metal Alu (0201)
	Light Grey (9406)		Anodic Brown (0420)		Metal Grey (0102)
	Brown Grey (9407)		Anodic Black (0720)		Metal Black (0104)

The colours may not match the actual products.



Old designation	Old Type	New designation	New Type
KABA		KABA	
KAB P 03 07 230 03 1	85 550 60	KABA P 03 060 10 230 03 1	85 010 00
KAB 03 07 400 03 1	85 550 65	KABA 3 03 060 10 400 03 1	85 010 01
KAB P 03 13 230 06 1	85 550 61	KABA P 03 110 10 230 05 1	85 010 02
KAB 03 13 400 06 1	85 550 66	KABA 3 03 110 10 400 05 1	85 010 03
KAB P 06 07 230 06 1	85 550 62	KABA P 05 105 10 230 08 1	85 010 04
KAB 06 07 400 06 1	85 550 67	KABA 3 05 105 10 400 08 1	85 010 05
KAB P 06 11 230 09 1	85 550 63	KABA P 05 140 10 230 10 1	85 010 06
KAB 06 11 400 09 1	85 550 68	KABA 3 05 140 10 400 10 1	85 010 07
KAB P 06 15 230 12 1	85 550 64	KABA P 05 175 10 230 13 1	85 010 08
KAB 06 15 400 12 1	85 550 69	KABA 3 05 175 10 400 13 1	85 010 09
ALATA		YALI COMFORT	
ALA 03 07 230 03 1	85 546 40	YALI C C 03 040 11 230 03 1	85 010 10
ALA 03 07 400 03 1	85 546 41	YALI C C 03 040 11 400 03 1	85 010 11
ALA 03 12 230 05 1	85 546 68	YALI C C 03 080 11 230 05 1	85 010 12
ALA 03 12 400 05 1	85 546 69	YALI C C 03 080 11 400 05 1	85 010 13
ALA 03 08 /2 230 05 1	85 546 42	YALI C C 03 050 21 230 05 1	85 010 14
ALA 03 08 /2 400 05 1	85 546 43	YALI C C 03 050 21 400 05 1	85 010 15
ALA 03 18 230 08 1	85 546 70	YALI C C 03 110 11 230 08 1	85 010 16
ALA 03 18 400 08 1	85 546 71	YALI C C 03 110 11 400 08 1	85 010 17
ALA 03 12 /2 230 08 1	85 546 72	YALI C C 03 080 21 230 08 1	85 010 18
ALA 03 12 /2 400 08 1	85 546 73	YALI C C 03 080 21 400 08 1	85 010 19
ALA 03 15 /2 230 10 1	85 546 74	YALI C C 03 100 21 230 10 1	85 010 20
ALA 03 15 /2 400 10 1	85 546 75	YALI C C 03 100 21 400 10 1	85 010 21
ALA 03 18 /2 230 12 1	85 546 76	YALI C C 03 130 21 230 13 1	85 010 22
ALA 03 18 /2 400 12 1	85 546 77	YALI C C 03 130 21 400 13 1	85 010 23
ALA 05 08 230 05 1	85 546 80	YALI C C 05 055 11 230 05 1	85 010 24
ALA 05 08 400 05 1	85 546 81	YALI C C 05 055 11 400 05 1	85 010 25
ALA 05 05 /2 230 05 1	85 546 82	YALI C C 05 040 21 230 05 1	85 010 26
ALA 05 05 /2 400 05 1	85 546 83	YALI C C 05 040 21 400 05 1	85 010 27
ALA 05 12 230 08 1	85 546 84	YALI C C 05 080 11 230 08 1	85 010 28
ALA 05 12 400 08 1	85 546 85	YALI C C 05 080 11 400 08 1	85 010 29
ALA 05 08 /2 230 08 1	85 546 86	YALI C C 05 050 21 230 08 1	85 010 30
ALA 05 08 /2 400 08 1	85 546 87	YALI C C 05 050 21 400 08 1	85 010 31
ALA 05 15 230 10 1	85 546 88	YALI C C 05 105 11 230 10 1	85 010 32
ALA 05 15 400 10 1	85 546 89	YALI C C 05 105 11 400 10 1	85 010 33
ALA 05 10 /2 230 10 1	85 546 90	YALI C C 05 065 21 230 10 1	85 010 34
ALA 05 10 /2 400 10 1	85 546 91	YALI C C 05 065 21 400 10 1	85 010 35
ALA 05 18 230 12 1	85 546 92	YALI C C 05 130 11 230 13 1	85 010 36
ALA 05 18 400 12 1	85 546 93	YALI C C 05 130 11 400 13 1	85 010 37
ALA 05 12 /2 230 12 1	85 546 94	YALI C C 05 080 21 230 13 1	85 010 38
ALA 05 12 /2 400 12 1	85 546 95	YALI C C 05 080 21 400 13 1	85 010 39
ALA 05 16 /2 230 16 1	85 546 96	YALI C C 05 095 21 230 15 1	85 010 40
ALA 05 16 /2 400 16 1	85 546 97	YALI C C 05 095 21 400 15 1	85 010 41

Old designation	Old Type	New designation	New Type
YALI G		YALI DIGITAL	
YAL G 03 07 230 03 1	85 586 20	YALI D C 03 040 11 230 03 1	85 010 58
YAL G 03 07 400 03 1	85 586 21	YALI D C 03 040 11 400 03 1	85 010 59
YAL G 03 11 230 05 1	85 586 24	YALI D C 03 080 11 230 05 1	85 010 60
YAL G 03 11 400 05 1	85 586 25	YALI D C 03 080 11 400 05 1	85 010 61
YAL G 03 07 /2 230 05 1	85 586 26	YALI D C 03 050 21 230 05 1	85 010 62
YAL G 03 07 /2 400 05 1	85 586 27	YALI D C 03 050 21 400 05 1	85 010 63
YAL G 03 17 230 08 1	85 586 28	YALI D C 03 110 11 230 08 1	85 010 64
YAL G 03 17 400 08 1	85 586 29	YALI D C 03 110 11 400 08 1	85 010 65
YAL G 03 10 /2 230 08 1	85 586 30	YALI D C 03 080 21 230 08 1	85 010 66
YAL G 03 10 /2 400 08 1	85 586 31	YALI D C 03 080 21 400 08 1	85 010 67
YAL G 03 19 230 10 1	85 586 32	YALI D C 03 150 11 230 10 1	85 010 68
YAL G 03 19 400 10 1	85 586 33	YALI D C 03 150 11 400 10 1	85 010 69
YAL G 03 12 /2 230 10 1	85 586 34	YALI D C 03 100 21 230 10 1	85 010 70
YAL G 03 12 /2 400 10 1	85 586 35	YALI D C 03 100 21 400 10 1	85 010 71
YAL G 03 14 /2 230 12 1	85 586 36	YALI D C 03 130 21 230 13 1	85 010 72
YAL G 03 14 /2 400 12 1	85 586 37	YALI D C 03 130 21 400 13 1	85 010 73
YAL G 03 19 /2 230 16 1	85 586 38	YALI D C 03 160 21 230 15 1	85 010 74
YAL G 03 19 /2 400 16 1	85 586 39	YALI D C 03 160 21 400 15 1	85 010 75
YAL G 03 23 /2 230 20 1	85 586 40	YALI D C 03 200 21 230 20 1	85 010 76
YAL G 03 23 /2 400 20 1	85 586 41	YALI D C 03 200 21 400 20 1	85 010 77
YAL G 05 06 230 05 1	85 586 44	YALI D C 05 055 11 230 05 1	85 010 78
YAL G 05 06 400 05 1	85 586 45	YALI D C 05 055 11 400 05 1	85 010 79
YAL G 05 04 /2 230 05 1	85 586 46	YALI D C 05 040 21 230 05 1	85 010 80
YAL G 05 04 /2 400 05 1	85 586 47	YALI D C 05 040 21 400 05 1	85 010 81
YAL G 05 10 230 08 1	85 586 48	YALI D C 05 080 11 230 08 1	85 010 82
YAL G 05 10 400 08 1	85 586 49	YALI D C 05 080 11 400 08 1	85 010 83
YAL G 05 06 /2 230 08 1	85 586 50	YALI D C 05 050 21 230 08 1	85 010 84
YAL G 05 06 /2 400 08 1	85 586 51	YALI D C 05 050 21 400 08 1	85 010 85
YAL G 05 12 230 10 1	85 586 52	YALI D C 05 105 11 230 10 1	85 010 86
YAL G 05 12 400 10 1	85 586 53	YALI D C 05 105 11 400 10 1	85 010 87
YAL G 05 08 /2 230 10 1	85 586 54	YALI D C 05 065 21 230 10 1	85 010 88
YAL G 05 08 /2 400 10 1	85 586 55	YALI D C 05 065 21 400 10 1	85 010 89
YAL G 05 14 230 12 1	85 586 56	YALI D C 05 130 11 230 13 1	85 010 90
YAL G 05 14 400 12 1	85 586 57	YALI D C 05 130 11 400 13 1	85 010 91
YAL G 05 09 /2 230 12 1	85 586 58	YALI D C 05 080 21 230 13 1	85 010 92
YAL G 05 09 /2 400 12 1	85 586 59	YALI D C 05 080 21 400 13 1	85 010 93
YAL G 05 12 /2 230 16 1	85 586 60	YALI D C 05 095 21 230 15 1	85 010 94
YAL G 05 12 /2 400 16 1	85 586 61	YALI D C 05 095 21 400 15 1	85 010 95
YAL G 05 14 /2 230 20 1	85 586 62	YALI D C 05 125 21 230 20 1	85 010 96
YAL G 05 14 /2 400 20 1	85 586 63	YALI D C 05 125 21 400 20 1	85 010 97

Old designation	Old type	New designation	New type
YALI F		YALI PARADA	
-	-	YALI P C 03 040 11 230 03 1	85 011 18
-	-	YALI P C 03 040 11 400 03 1	85 011 19
-	-	YALI P C 03 080 11 230 05 1	85 011 20
-	-	YALI P C 03 080 11 400 05 1	85 011 21
-	-	YALI P C 03 050 21 230 05 1	85 011 22
-	-	YALI P C 03 050 21 400 05 1	85 011 23
-	-	YALI P C 03 110 11 230 08 1	85 011 24
-	-	YALI P C 03 110 11 400 08 1	85 011 25
-	-	YALI P C 03 080 21 230 08 1	85 011 26
-	-	YALI P C 03 080 21 400 08 1	85 011 27
-	-	YALI P C 03 150 11 230 10 1	85 011 28
-	-	YALI P C 03 150 11 400 10 1	85 011 29
-	-	YALI P C 03 100 21 230 10 1	85 011 30
-	-	YALI P C 03 100 21 400 10 1	85 011 31
-	-	YALI P C 03 130 21 230 13 1	85 011 32
-	-	YALI P C 03 130 21 400 13 1	85 011 33
-	-	YALI P C 03 160 21 230 15 1	85 011 34
-	-	YALI P C 03 160 21 400 15 1	85 011 35
-	-	YALI P C 03 200 21 230 20 1	85 011 36
-	-	YALI P C 03 200 21 400 20 1	85 011 37
YAL F 05 06 230 05 1	85 586 02	YALI P C 05 055 11 230 05 1	85 011 38
YAL F 05 06 400 05 1	85 586 03	YALI P C 05 055 11 400 05 1	85 011 39
-	-	YALI P C 05 040 21 230 05 1	85 011 40
-	-	YALI P C 05 040 21 400 05 1	85 011 41
YAL F 05 10 230 08 1	85 586 04	YALI P C 05 080 11 230 08 1	85 011 42
YAL F 05 10 400 08 1	85 586 05	YALI P C 05 080 11 400 08 1	85 011 43
-	-	YALI P C 05 050 21 230 08 1	85 011 44
-	-	YALI P C 05 050 21 400 08 1	85 011 45
YAL F 05 12 230 10 1	85 586 06	YALI P C 05 105 11 230 10 1	85 011 46
YAL F 05 12 400 10 1	85 586 07	YALI P C 05 105 11 400 10 1	85 011 47
-	-	YALI P C 05 065 21 230 10 1	85 011 48
-	-	YALI P C 05 065 21 400 10 1	85 011 49
YAL F 05 14 230 12 1	85 586 08	YALI P C 05 130 11 230 13 1	85 011 50
YAL F 05 14 400 12 1	85 586 09	YALI P C 05 130 11 400 13 1	85 011 51
-	-	YALI P C 05 080 21 230 13 1	85 011 52
-	-	YALI P C 05 080 21 400 13 1	85 011 53
-	-	YALI P C 05 095 21 230 15 1	85 011 54
-	-	YALI P C 05 095 21 400 15 1	85 011 55
-	-	YALI P C 05 125 21 230 20 1	85 011 56
-	-	YALI P C 05 125 21 400 20 1	85 011 57

Old designation	Old type	New designation	New type
YALI PF		YALI RAMO	
-	-	YALI R C 03 040 11 230 03 1	85 011 58
-	-	YALI R C 03 040 11 400 03 1	85 011 59
-	-	YALI R C 03 080 11 230 05 1	85 011 60
-	-	YALI R C 03 080 11 400 05 1	85 011 61
-	-	YALI R C 03 050 21 230 05 1	85 011 62
-	-	YALI R C 03 050 21 400 05 1	85 011 63
-	-	YALI R C 03 110 11 230 08 1	85 011 64
-	-	YALI R C 03 110 11 400 08 1	85 011 65
-	-	YALI R C 03 080 21 230 08 1	85 011 66
-	-	YALI R C 03 080 21 400 08 1	85 011 67
-	-	YALI R C 03 150 11 230 10 1	85 011 68
-	-	YALI R C 03 150 11 400 10 1	85 011 69
-	-	YALI R C 03 100 21 230 10 1	85 011 70
-	-	YALI R C 03 100 21 400 10 1	85 011 71
-	-	YALI R C 03 130 21 230 13 1	85 011 72
-	-	YALI R C 03 130 21 400 13 1	85 011 73
-	-	YALI R C 03 160 21 230 15 1	85 011 74
-	-	YALI R C 03 160 21 400 15 1	85 011 75
-	-	YALI R C 03 200 21 230 20 1	85 011 76
-	-	YALI R C 03 200 21 400 20 1	85 011 77
YAL PF 05 06 230 05 1	85 586 12	YALI R C 05 055 11 230 05 1	85 011 78
YAL PF 05 06 400 05 1	85 586 13	YALI R C 05 055 11 400 05 1	85 011 79
-	-	YALI R C 05 040 21 230 05 1	85 011 80
-	-	YALI R C 05 040 21 400 05 1	85 011 81
YAL PF 05 10 230 08 1	85 586 14	YALI R C 05 080 11 230 08 1	85 011 82
YAL PF 05 10 400 08 1	85 586 15	YALI R C 05 080 11 400 08 1	85 011 83
-	-	YALI R C 05 050 21 230 08 1	85 011 84
-	-	YALI R C 05 050 21 400 08 1	85 011 85
YAL PF 05 12 230 10 1	85 586 16	YALI R C 05 105 11 230 10 1	85 011 86
YAL PF 05 12 400 10 1	85 586 17	YALI R C 05 105 11 400 10 1	85 011 87
-	-	YALI R C 05 065 21 230 10 1	85 011 88
-	-	YALI R C 05 065 21 400 10 1	85 011 89
YAL PF 05 14 230 12 1	85 586 18	YALI R C 05 130 11 230 13 1	85 011 90
YAL PF 05 14 400 12 1	85 586 19	YALI R C 05 130 11 400 13 1	85 011 91
-	-	YALI R C 05 080 21 230 13 1	85 011 92
-	-	YALI R C 05 080 21 400 13 1	85 011 93
-	-	YALI R C 05 095 21 230 15 1	85 011 94
-	-	YALI R C 05 095 21 400 15 1	85 011 95
-	-	YALI R C 05 125 21 230 20 1	85 011 96
-	-	YALI R C 05 125 21 400 20 1	85 011 97

Our Commitment to You

WHAT ABOUT THE WATTS?

An average house in a Nordic climate with standard insulation and ceiling heights between 2.40-2.50 m requires around 70-75 W per square metre of floor area. To calculate the required heating power for other ceiling heights, base the wattage on 30 W per cubic metre of volume. In some cases it can be an advantage to have a gross power need of 100W/m² for underfloor heating. This calculation is based on houses in the Nordic climate and can also vary according to the standard of the house. For more information about the power requirements for houses in other climatic regions, contact your local electrical contractor or energy advisory service.


You may also visit our website for further technical information - www.san-as.com.

SAFETY:

All our radiators meet compulsory CE standards as well as the specific requirements of countries where they are sold. They operate on low surface temperatures and produce no hot spots. Some radiators have a built-in limited surface temperature of 60°C. On others, the setting can simply be adjusted. Most thermostat controls also have lockable covers to prevent small, adventurous fingers from interfering with the setting.

HEALTH:

As we spend quite a lot of our lives indoors, it's important for our wellbeing that our internal environment offers a healthy level of heating comfort. Our radiators reduce dust circulation, preventing the unpleasant odour of burning dust, which makes them ideal for those who suffer from allergies. And, unlike open radiators that heat the air by circulating air through hot elements, our oil-filled radiators heat air evenly using a completely closed construction. They produce a gentle, comfortable heat that doesn't dry the air or skin, or irritate your eyes and they operate at a very low surface temperature. The oil-filled radiators are a safe, quiet, odourless and healthy alternative to open radiators and completely fan-blown heating systems.

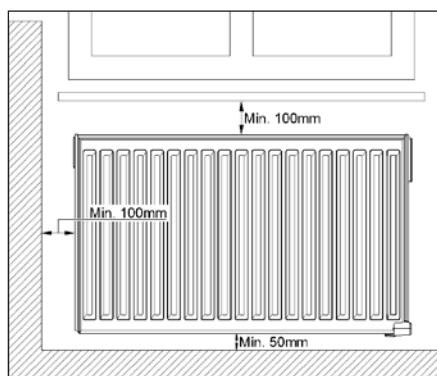

HEATING AND THE ENVIRONMENT

We are committed to delivering environmentally friendly radiators, and this commitment shows right through every product's life cycle.


We use recyclable materials in our production processes wherever possible. Most of our radiators are filled with biodegradable vegetable oil, rather than fossil fuels. And because our radiators are electric, they can be powered by alternative green energy sources like solar, wind and geothermal.

Through of our concern for the environment we are committed to producing radiators that reduce energy consumption and your heating bills. That is why many of our radiators have inbuilt, state of the art thermostats for precise temperature control, giving you exactly the heat you need with no waste. For instance, if the sun comes out and begins to warm the room, the thermostat will switch off until the room's temperature drops below your chosen setting.

To further reduce your heating bills, it is possible to program our radiators to adjust their temperature by a given amount at specific times of the day or, through a central control device, to adjust them to a desired temperature whenever you choose.

Similarly, if you're away from home, modern technology makes it possible to control the temperature setting through mobile telephones and the internet. A number of our radiators are compatible with this technology. Purchasing the device allows you, from a distance, to switch from a reduced heating program to your normal temperature so that the house warms up in time for your arrival. Perfect for your holiday house! Some of the radiators supporting this technology also enable control of each room.

And our commitment to the environment is evident even when our radiators reach the end of their service, as most parts can be recycled, reducing landfill and raw material use.

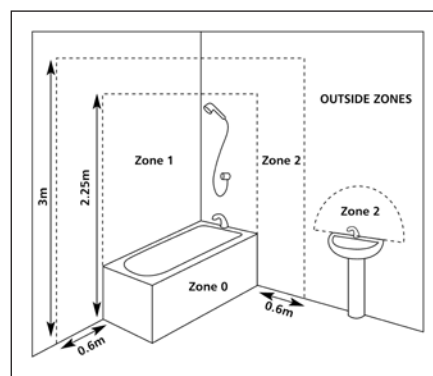

SAN Electro Heat a/s

Gillelejevej 30b - DK-3230 Græsted - Denmark

Tel.: +45 48 39 88 88 - Fax: +45 48 39 88 98 - info@san-as.com - www.san-as.com

CVR No.: 42 16 59 13

SAN[®]

Member of the NIBE Group

Electro Heat

- Process Heating
- Heating Elements
- Heating Cables
- Finned Tubular Radiators
- Immersion Heaters
- Church Heating
- Frost Protection
- Ex-Material
- Oilfilled Radiators
- Drum Heaters
- Heating Pads
- Flow Heaters
- Air Duct Heaters
- High-voltage Resistors
- Controllers



With more than 50 years of experience SAN Electro Heat's most valuable asset is special knowhow about design, product development and manufacturing of professional electrical heating equipment for industrial use.

The company is geared to deliver 100% customized products, and thus functions both as a catalyst for a development project and as supplier of the final product. At the same time we insure and maintain the required quality level, mechanical and electrical dimensioning, approvals and documentation.



Denmark, Mainoffice:

Gillelejevej 30b
DK-3230 Graested
info@san-as.com
tel.: +45 4839 8888
fax: +45 4839 8898

UK:

Bob Beaumont
robe@san-as.com
mobile: +44 779 541 1105

Germany:

Wolfgang Biehs
wolfgang.biehs@nibe.de
tel.: +49 6171 887 724
mobile: +49 1622 793 484

www.san-as.com

2018/April 25th