



SITOP BATTERY MODULE 24 V/7 AH WITH SERVICE-FREE SEALED LEAD-ACID BATTERIES FOR SITOP DC UPS MODULE 6 A, 15 A AND 40 A

Technical specifications

Charging current/charging voltage

End of charging voltage / for DC

• at 10 °C / recommended	27.8 V
• at 20 °C / recommended	27.3 V
• at 30 °C / recommended	26.8 V
• at 40 °C / recommended	26.6 V

charging current / maximum	1.75 A
----------------------------	--------

Safety

Safety

CE mark	Yes
---------	-----

Protection class IP	IP00
---------------------	------

Operating data

Ambient temperature

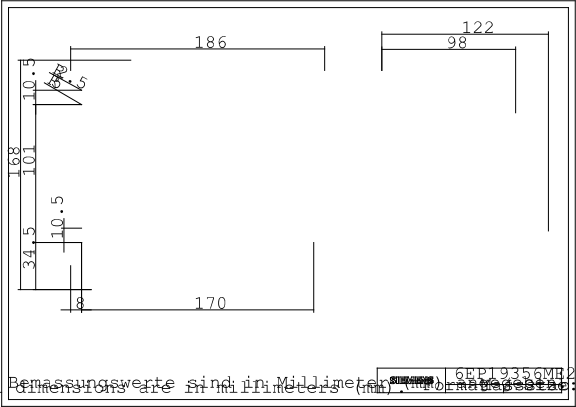
• in operation	5 °C ... 40 °C
• on transport	-20 °C ... 50 °C
• in storage	-20 °C ... 50 °C

Relative, temporary capacity loss / at 20 °C / in a month / typical	3 %
---	-----

Service life

[nicht versorgt: PMD_ABU065_001_000]

•	4 a
---	-----

•	2 a
•	1 a
Mechanics	
Width / of the housing	186 mm
Height / of the housing	168 mm
Depth / of the housing	121 mm
Installation width	206 mm
Mounting height	188 mm
Net weight	6 kg
	12
	

letzte Änderung:

Aug 26, 2011