



Figure similar

MLFB-Ordering data

6SL3220-2YE50-0AF0

Client order no. :

Order no. :

Offer no. :

Remarks :

Item no. :

Consignment no. :

Project :

Rated data			General tech. specifications	
Input			Power factor λ	0.90 ... 0.95
Number of phases	3 AC		Offset factor $\cos \varphi$	0.99
Line voltage	380 ... 480 V +10 % -20 %		Efficiency η	0.98
Line frequency	47 ... 63 Hz		Sound pressure level (1m)	74 dB
Rated voltage	400V IEC	480V NEC	Power loss	3.670 kW
Rated current (LO)	308.00 A	301.00 A	Filter class (integrated)	RFI suppression filter for Category C2
Rated current (HO)	275.00 A	263.00 A	Ambient conditions	
Output			Cooling	Air cooling using an integrated fan
Number of phases	3 AC		Cooling air requirement	0.210 m³/s (7.416 ft³/s)
Rated voltage	400V IEC	480V NEC	Installation altitude	1000 m (3280.84 ft)
Rated power (LO)	160.00 kW	250.00 hp	Ambient temperature	
Rated power (HO)	132.00 kW	150.00 hp	Operation	-20 ... 45 °C (-4 ... 113 °F)
Rated current (LO)	302.00 A	302.00 A	Transport	-40 ... 70 °C (-40 ... 158 °F)
Rated current (HO)	250.00 A	240.00 A	Storage	-25 ... 55 °C (-13 ... 131 °F)
Rated current (IN)	309.00 A		Relative humidity	
Max. output current	408.00 A		Max. operation	95 % At 40 °C (104 °F), condensation and icing not permissible
Pulse frequency	4 kHz		Closed-loop control techniques	
Output frequency for vector control	0 ... 200 Hz		V/f linear / square-law / parameterizable	Yes
Output frequency for V/f control	0 ... 550 Hz		V/f with flux current control (FCC)	Yes
Overload capability			V/f ECO linear / square-law	Yes
Low Overload (LO)			Sensorless vector control	Yes
110% base load current IL for 60 s in a 300 s cycle time			Vector control, with sensor	No
High Overload (HO)			Encoderless torque control	Yes
150% x base load current IH for 60 s within a 600 s cycle time			Torque control, with encoder	No



Figure similar

MLFB-Ordering data

6SL3220-2YE50-0AF0

Mechanical data	
Degree of protection	IP20 / UL open type
Size	FSG
Net weight	105 kg (231.49 lb)
Width	305 mm (12.01 in)
Height	999 mm (39.33 in)
Depth	360 mm (14.17 in)
Inputs / outputs	

Standard digital inputs

Number	6
Switching level: 0→1	11 V
Switching level: 1→0	5 V
Max. inrush current	15 mA

Fail-safe digital inputs

Number	1
--------	---

Digital outputs

Number as relay changeover contact	2
Output (resistive load)	DC 30 V, 5.0 A
Number as transistor	0

Analog / digital inputs

Number	2 (Differential input)
Resolution	10 bit

Switching threshold as digital input

0→1	4 V
1→0	1.6 V

Analog outputs

Number	1 (Non-isolated output)
--------	-------------------------

PTC/ KTY interface

1 motor temperature sensor input, sensors that can be connected: PTC, KTY and Thermo-Click, accuracy ±5 °C
--

Communication	
---------------	--

Communication	PROFINET / EtherNet/IP
---------------	------------------------

Connections	
-------------	--

Signal cable

Conductor cross-section	0.15 ... 1.50 mm² (AWG 24 ... AWG 16)
-------------------------	---------------------------------------

Line side

Version	M10 screw
---------	-----------

Conductor cross-section	35.00 ... 185.00 mm² (AWG 2 ... AWG -3)
-------------------------	---

Motor end

Version	M10 screw
---------	-----------

Conductor cross-section	35.00 ... 185.00 mm² (AWG 2 ... AWG -3)
-------------------------	---

DC link (for braking resistor)

PE connection	M10 screw
---------------	-----------

Max. motor cable length

Shielded	300 m (984.25 ft)
Unshielded	450 m (1476.38 ft)

Standards	
-----------	--

Compliance with standards	UL, cUL, CE, C-Tick (RCM), EAC, KCC, SEMI F47, REACH
---------------------------	--

CE marking	EMC Directive 2004/108/EC, Low-Voltage Directive 2006/95/EC
------------	---

SIEMENS

Data sheet for SINAMICS G120X

MLFB-Ordering data

6SL3220-2YE50-0AF0



Figure similar


Converter losses to EN 50598-2*

Efficiency class

IE2

Comparison with the reference converter (90% / 100%)

-43.00 %

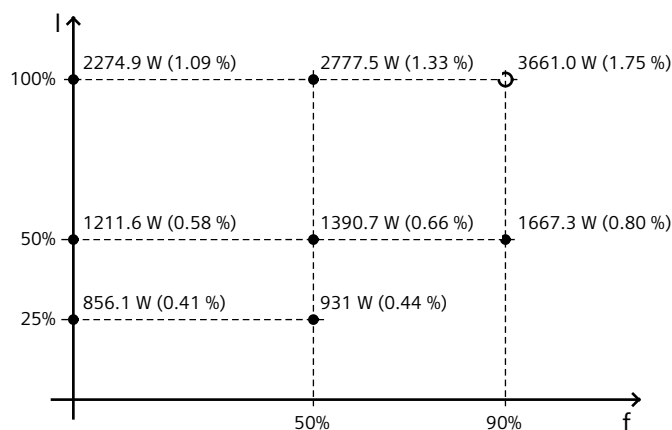

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard EN 50598) of the relative torque generating current (I) over the relative motor stator frequency(f). The values are valid for the basic version of the converter without options/components.

*converted values

Operator panel: Basic Operator Panel (BOP-2)

Screen

Display design

LCD, monochrome

Ambient conditions

Ambient temperature during

Operation

0 ... 50 °C (32 ... 122 °F)

Storage

-40 ... 70 °C (-40 ... 158 °F)

Transport

-40 ... 70 °C (-40 ... 158 °F)

Mechanical data

Degree of protection

IP55 / UL type 12

Net weight

0.14 kg (0.31 lb)

Width

70.0 mm (2.76 in)

Height

106.85 mm (4.21 in)

Depth

19.60 mm (0.77 in)

Relative humidity at 25°C during

Max. operation

95 %

Approvals

Certificate of suitability

CE, cULus, EAC, KCC, RCM