




N Jack Bulkhead Connector Crimp for LMR200 kabler


Egnede kabler:
LMR200

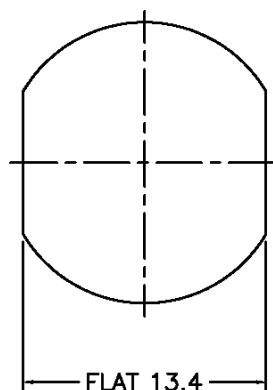


EAN: 5704717002924

KD-5035


NUT	BRASS	1	NICKEL
WASHER	BRASS	1	NICKEL
GASKET	S.L.RUBBER	1	—
FERRULE	BRASS	1	NICKEL
SMALL PIN	BRASS	1	GOLD
INSULATOR	TEFLON	2	—
CENTER PIN	PHOSPHOR BRONZE	1	GOLD
BODY	BRASS	1	NICKEL
DESCRIPTION	MATERIAL	Q'TY	FINISH

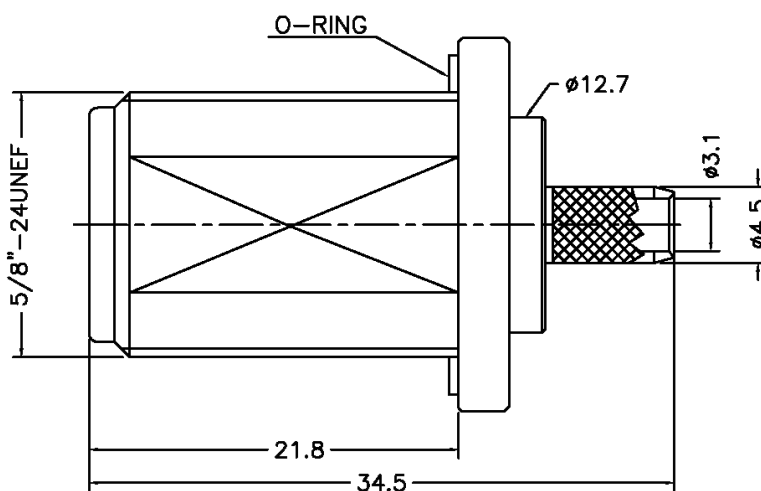

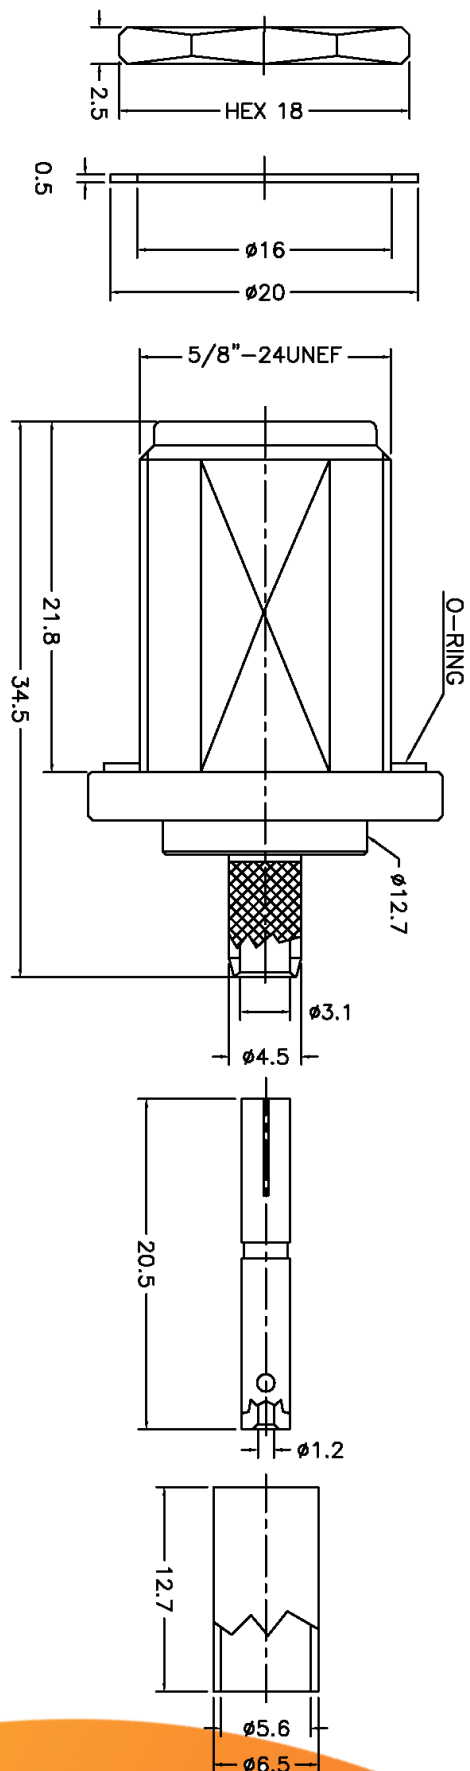

SPECIFICATIONS:

IMPEDANCE : 50 OHM
 FREQUENCY RANGE : 0-11 GHz
 WORKING VOLTAGE : 1,500 V MAX
 INSULATION RESISTANCE : 5,000 MEGOHMS MIN
 DIELECTRIC WITHSTANDING VOLTAGE : 2,500 V MIN
 CONTACT RESISTANCE : CENTER CONTACT : 1.0 MILLIOHMS
 OUTER CONTACT : 0.2 MILLIOHMS
 VSWR : STRAIGHT : 1.3 MAX
 RIGHT ANGLE : 1.35 MAX



ROHS COMPLIANT

NUT	BRASS	1	NICKEL
WASHER	BRASS	1	NICKEL
GASKET	S.L.RUBBER	1	-
FERRULE	BRASS	1	NICKEL
SMALL PIN	BRASS	1	GOLD
INSULATOR	TEFLON	2	-
CENTER PIN	PHOSPHOR BRONZE	1	GOLD
BODY	BRASS	1	NICKEL
DESCRIPTION	MATERIAL	QTY	FINISH

PART NUMBER N1-8502-LMR200

DESCRIPTION:

N JACK BULKHEAD CONNECTOR
 CRIMP FOR LMR200 CABLE

DRAWN	WCW	SCALE	2.5 : 1
DESIGNED	WCW	UNIT	mm
APPROVED	YTT	TOLERANCE	±0.2
REMARK		DATE	OCT/30/1998