




## BESKRIVELSE

**188**

Kontraventil til vand, olie og trykluft.  
Messing.  
For lodret og vandret montering.  
"Glory" type.

## DIMENSIONER

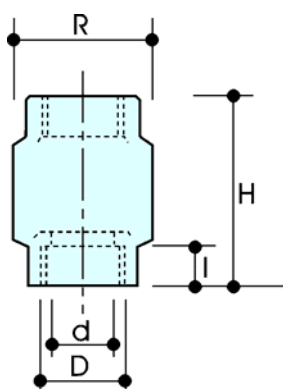

D"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"
d	15.2	15.5	20	25	33	38	48	64	76	98
H	52	58	65	75	80	86	94	93	104	119
I	9	11	12	14	15	16	18	16	18	20
R	29	32	39	48	60	67	84	104	121	156
Gr.	115	150	225	330	545	685	1025	1260	1810	3100

Alle gevind er i overensstemmelse med ISO 7/1 eller ISO 228

## MATERIALER

<b>Ventil</b>	CuZn40Pb2 Cw617N (DIN 50930 del.6)
<b>Forskruning</b>	CuZn40Pb2 Cw617N (DIN 50930 del.6)
<b>O-ring</b>	NBR pakning
<b>Fjeder</b>	AISI 302

## VARIANTER


188	MxM, kontraventil
188NDA	MxM, kontraventil, afz.fri
188CRM	Kontraventil m/klemringe
488NDA	MxN, kort kontraventil, afz.fri
188TEA	MxM, kontraventil, TEA belægning



## GODKENDELSER



## TRYKTABSDIAGRAM

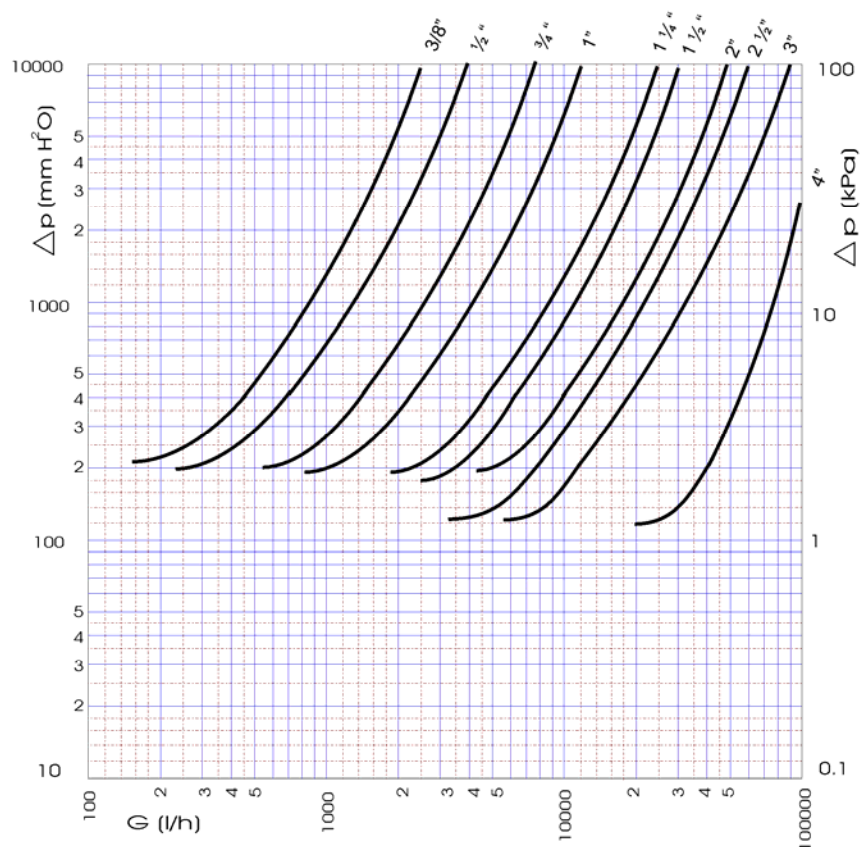

Dim.	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"
Kv	2.5	4	7.5	12	25	30	48	60	90	120

## ANBEFALET DRIFTSTEMPERATUR/ MAKSIMALTRYK

10 bar - 110°C - non shock (fra 3/8" - 2")

8 bar - 110°C - non shock (fra 2.1/2" - 4")